

# MQ6905 Datasheet

## V1.5

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

## Contents

1. Change History .....	8
2. Product Overview.....	9
2.1 Features .....	9
2.2 Preface.....	11
2.3 Block Diagram .....	11
2.4 Pin Assignment / Description.....	12
3. Electronic Characteristics .....	17
3.1 Absolute Maximum Ratings.....	17
3.2 Operation Conditions .....	17
3.3 D.C. Characteristics .....	18
3.4 AD Conversion Characteristics.....	19
3.5 Flash Characteristics .....	20
3.6 MTP Characteristics.....	20
4. Central Processing Unit (CPU) .....	21
4.1 General Concept.....	21
4.2 Addressing Space.....	21
4.2.1 Program Memory - Flash .....	22
4.2.2 Data Memory - RAM .....	23
4.2.3 Special Function Register - SFR.....	23
4.3 Operation Modes .....	25
4.3.1 Operation Mode Control Circuit.....	25
4.3.2 Operation Mode Control.....	29
4.4 Stack Area and Stack Pointer.....	38
4.4.1 Stack Area .....	38
4.4.2 Stack Pointer.....	38
4.5 Program Counter (PC).....	39
4.5.1 Program Counter - PC .....	39
4.5.2 Effects of Jump Instructions on the PC Value .....	40
4.6 General-Purpose Register.....	40
4.6.1 A Registers .....	41
4.6.2 C Registers .....	41
4.6.3 DE Registers.....	41
4.6.4 HL Registers.....	41
4.6.5 16-Bit General-Purpose Registers (IX, IY) .....	42
4.7 Program Status Word (PSW).....	42

4.7.1	Zero Flag (ZF).....	43
4.7.2	Carry Flag (CF) .....	44
4.7.3	Half Carry Flag (HF) .....	44
4.7.4	Sign Flag (SF).....	44
4.7.5	Overflow Flag (VF).....	44
4.7.6	Jump Status Flag (JF) .....	44
4.8	Low Power Consumption Function for Peripherals .....	45
4.9	Key-on Wakeup (KWU).....	47
4.9.1	Configuration.....	47
4.9.2	Control.....	48
4.9.3	Function.....	49
5.	Reset Function.....	50
5.1	Reset Control Circuit.....	50
5.1.1	Configuration.....	50
5.1.2	Control.....	50
5.1.3	Function.....	52
5.1.4	Reset Signal Generating Factors .....	54
5.2	Power-on Reset Circuit.....	58
5.2.1	Configuration.....	58
5.2.2	Function.....	58
5.3	Voltage Detection Circuit.....	60
5.3.1	Configuration.....	60
5.3.2	Control.....	61
5.3.3	Function.....	62
5.3.4	Register Setting.....	65
6.	System Clock Controller.....	67
6.1	Configuration.....	67
6.2	Control .....	67
6.3	Function.....	70
6.3.1	Clock Generator .....	70
6.3.2	Clock Gear .....	72
6.3.3	Timing Generator.....	72
6.4	Warm-up Counter .....	74
6.4.1	Warm-up Counter Operation When the Oscillation is Enabled by Hardware .....	74
6.4.2	Warm-up Counter Operation When the Oscillation is Enabled by Software .....	76
7.	Interrupts.....	78

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

7.1	Interrupts Latches (IL25 to IL3).....	79
7.2	Interrupt Enable Register (EIR) .....	80
7.3	Interrupt Master Enable Flag (IMF) .....	80
7.4	Individual Interrupt Enable Flag (EF30 to EF4) .....	81
7.5	Using a register bank to save/restore general-purpose registers.....	83
7.6	External Interrupt Control Circuit .....	84
7.6.1	Configuration.....	84
7.6.2	Control.....	85
7.6.3	Function.....	89
8.	I/O Ports.....	96
8.1	I/O Port Control Registers .....	97
8.2	List of I/O Ports Settings.....	98
	INT4 input.....	99
	INT3 input.....	99
	INT2 input.....	99
	DOVB output.....	99
8.3	I/O Port Control Register .....	100
8.3.1	Port P0 (P03 to P00) Register.....	100
8.3.2	Port P1 (P13 to P10) Register.....	102
8.3.3	Port P2 (P27 to P20) Register.....	104
8.3.4	Port P4 (P47 to P40) Register.....	106
8.3.5	Port P7 (P77 to P70) Register.....	108
8.3.6	Port P8 (P81 to P80) Register.....	109
8.3.7	Port P9 (P91 to P90).....	111
8.3.8	Port PB (PB7 to PB4) .....	113
8.4	Serial Interface Selecting Function .....	115
9.	10-bit AD Converter (ADC).....	118
9.1	Configuration.....	118
9.2	Control .....	118
9.3	Function.....	121
9.3.1	Single Mode.....	121
9.3.2	Repeat Mode.....	122
9.3.3	AD Operation Disable and Forced Stop of AD Operation.....	123
9.4	Register Setting.....	123
9.5	Starting STOP/IDLE0/SLOW Modes.....	124
9.6	Analog Input Voltage and AD Conversion Result.....	124

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

- 9.7 Precautions about the AD Converter ..... 125
  - 9.7.1 Analog Input Pin Voltage Range..... 125
  - 9.7.2 Analog Input Pins Used as Input / Output Ports..... 125
  - 9.7.3 Noise Countermeasure ..... 125
- 10. Timer / Counter ..... 126
  - 10.1 Watchdog Timer (WDT) ..... 126
    - 10.1.1 Configuration ..... 126
    - 10.1.2 Control ..... 126
    - 10.1.3 Function..... 128
  - 10.2 Divider Output (DVOB) ..... 133
    - 10.2.1 Configuration ..... 133
    - 10.2.2 Control ..... 133
    - 10.2.3 Function..... 134
  - 10.3 Time Base Timer (TBT)..... 135
    - 10.3.1 Configuration ..... 135
    - 10.3.2 Control ..... 135
    - 10.3.3 Function..... 136
  - 10.4 Real Time Clock (RTC)..... 137
    - 10.4.1 Configuration ..... 137
    - 10.4.2 Control ..... 137
    - 10.4.3 Function..... 138
    - 10.4.4 Real Time Clock Operation ..... 139
  - 10.5 8-bit Timer Counters..... 140
    - 10.5.1 Control ..... 140
    - 10.5.2 Low Power Consumption Function..... 145
    - 10.5.3 Function..... 145
  - 10.6 16-bit Timer Counter (TCA)..... 172
    - 10.6.1 Control ..... 172
    - 10.6.2 Low Power Consumption Function..... 175
    - 10.6.3 Timer Function ..... 176
    - 10.6.4 Noise Canceller ..... 191
- 11. Asynchronous Serial Interface (UART)..... 192
  - 11.1 Control ..... 192
  - 11.2 Low Power Consumption Function..... 195
  - 11.3 Protection of UART1CR1 and UART1CR2 Registers from Being Changed..... 196
  - 11.4 Activation of STOP, IDLE0 or SLEEP0 Mode..... 196

11.4.1	Transition of Register Status .....	196
11.4.2	Transition of TXD Pin Status .....	197
11.5	Transfer Data Format .....	197
11.6	Infrared Data Format Transfer Mode.....	198
11.7	Transfer Baud Rate .....	198
11.7.1	Transfer Baud Rate Calculation Method.....	200
11.8	Data Sampling Method.....	201
11.9	Received Data Noise Rejection .....	203
11.10	Transmit/Receive Operation.....	204
11.10.1	Data Transmit Operation.....	204
11.10.2	Data Receive Operation.....	204
11.11	Transmit/Receive Operation.....	205
11.11.1	Parity Error .....	205
11.11.2	Framing Error .....	205
11.11.3	Overrun Error .....	207
11.11.4	Receive Data Buffer Full .....	209
11.11.5	Transmit Busy Flag .....	210
11.11.6	Transmit Buffer Full .....	211
11.12	Receiving Process.....	211
12.	Flash Memory.....	214
12.1	Flash Memory Control .....	214
12.2	Flash Memory Functions .....	216
12.2.1	Flash Memory Command Sequence and Toggle Control (FLSCR1 <FLSMD>)	216
12.2.2	Flash memory area switching (FLSCR1<FAREA>)	216
12.2.3	RAM area switching (33<RAREA>)	217
12.2.4	BOOTROM area switching (FLSCR1<BAREA>)	217
12.2.5	Flash Memory Standby Control (FLSSTB <FSTB>)	220
12.3	Command Sequence.....	220
12.3.1	Byte Program.....	221
12.3.2	Sector Erase (1K Byte Partial Erase).....	221
12.3.3	Chip erase (all erase) .....	224
12.3.4	Security program .....	224
12.4	Toggle Bit (D6).....	224
12.5	Access to the Flash Memory Area .....	225
12.5.1	Flash Memory Control in MCU Mode.....	225
Appendix A. In-System Programming Function (ISP) .....		228

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

Control Pins.....	228
How to Connect MQ-Link Debugger to a Target System.....	229
Appendix B. Package Dimensions .....	230

## 1. Change History

Version	Approved Date	Description
V1.0	2015/6/1	新建立
V1.1	2015/8/14	<ol style="list-style-type: none"> <li>1. 对外产品型号由 MQ6805 更改为 MQ6905，故将规格书中产品型号全部更改为 MQ6905。</li> <li>2. 加入 LQFP48 (7x7)之封装型式, 并于「2.4 Pin Assignment / Description」加入脚位图。</li> </ol>
V1.2	2016/3/18	Add "Appendix B. Package Dimensions."
V1.3	2016/5/24	Update "Figure 2.1 Block diagram" and "Figure 4.1 Addressing Map of MQ6905"
V1.4	2016/8/12	Update chapter 2.4 pin assignment; the function description of "VAREF/AVDD"
V1.5	2017/7/27	<ol style="list-style-type: none"> <li>1. 更新 2.4 Pin Assignment 章节中的注解</li> <li>2. 更新外部线路建议与示意图(图 2.2 与图 2.3)</li> <li>3. 加入 3.1 Absolute Maximum Rating 表中 power dissipation 以及 soldering temperature(time)参数</li> <li>4. 更新 3.5 Flash Characteristics &amp; 3.6 MTP Characteristics 章节中工作环境条件</li> <li>5. 更新图 4.13 Key-on Wakeup(KWU)架构图</li> <li>6. 更新 5.1.2 Reset control 中 SYSCR3 寄存器</li> <li>7. 更新 5.1.4.1 External Reset Input (RESETB Pin Input)章节中图 5.2 及叙述</li> <li>8. 5.2.2 Power-on reset function 图 5.5 下方加入各参数列表</li> <li>9. 更新 6.2 System clock control 中 SYSCR2 寄存器</li> <li>10. 更新图 6.2 中外振引脚内置电容叙述</li> <li>11. 7.4 Individual Interrupt Enable Flag 中 EIRD 寄存器地址更新</li> <li>12. 更新 7.4 Individual Interrupt Enable Flag (EF30 to EF4)中 EIRD 寄存器</li> <li>13. 新增 7.5 Using a register bank to save/restore general-purpose registers 章节</li> <li>14. 更新 9.2 Control 中 ADCCR1 寄存器叙述</li> <li>15. 加入 11.7 Transfer Baud Rate 中 Baud rate 清单</li> <li>16. 更新 12.3 Command Sequence 中表 12.1</li> </ol>

## 2. Product Overview

### 2.1 Features

#### ◆ Basic Information

- Operating voltage: 2.0 ~ 5.5V
- Operating temperature: -40°C ~ 85°C
- Powerful i87 8-bit MCU core (1T instruction cycle)

#### ◆ Memory Configuration

- 16384 bytes program memory ROM (Endurance=100K)
- 16368 bytes MTP (Endurance=20K)
- 2K bytes RAM

#### ◆ I/O Pin Configuration

- 40 bi-directional I/Os
- 4-CH 8-bit PWM output (or counter input)
- 2-CH 16-bit PWM output (or counter input)
- 8 external key-on wakeup pins
- 3 set of UART pins (TX/RX)

#### ◆ 2 Sets (Total 8 Levels) Low Voltage Detection (LVD)

#### ◆ 30 Interrupt Sources

- 24 internal interrupts
- 6 external interrupt input pins

#### ◆ Flexible Operation Modes

- 10 operation modes (Normal x2, Slow x2, Idle x2, Sleep x2, Stop, Reset)

#### ◆ 10-bit AD Converter (ADC)

- 8 external ADC input
- External AD reference voltage

#### ◆ Timer / Counter Information

- Four 8-bit timers  
(configurable to Two 16-bit timers)

- Two 16-bit Timer
- Time base timing generator (TBT)
- Watch-dog Timer (WDT)
- Warm-up Counter (WUC)
- Real Time Clock (RTC)  
(with 8-bit frequency divider)

#### ◆ Clock Sources

- External crystal or internal oscillator
- Internal oscillator frequency 8MHz
- Support 1MHz ~ 16MHz or 32768Hz external crystal

#### ◆ ISP (In-System Programming) Function

#### ◆ UART

#### ◆ I2C

#### ◆ On-Chip Debugging

- Break/Event/Trace
- RAM monitor & Flash/MTP memory writing

#### ◆ Package Type

- LQFP44 (10x10)

## 2.2 Preface

MQ6905 has a powerful i87 8-bit MCU core embedded with real 10-bit ADC (Analog to Digital Converter) function. For general functions of the MCU, such as registers and flags of the CPU, timers / counter information and reset / detection circuit, please refer to “iMQ i87 User Manual” for details. Specific functions of MQ6905 such as program / data memory, special function register, operation modes of the CPU, interrupts, system clocking and I/O port information are listed in the following sections.

Please note that in this document, 64K Bytes or smaller memory style is used. Therefore, the address format will be 0x0000 to 0xFFFF.

Note that pin names with low-active values, such as  $\overline{\text{RESET}}$ ,  $\overline{\text{PWM00}}$ ,  $\overline{\text{PWM01}}$ ,  $\overline{\text{PWM02}}$ ,  $\overline{\text{PWM03}}$ ,  $\overline{\text{PPGA0}}$ ,  $\overline{\text{DVO}}$  and so on, are presented by ending with “B” in the content, meaning “bar” for inversion. Therefore, they are written as RESETB, PWM00B, PWM01B, PWM02B, PWM03B, PPGA0B, DV0B and so on.

Besides, to indicate certain bit name in a register, the representation REGISTER\_NAME <BIT\_NAME> is used in this document. For example, ILL <IL5> indicates the bit IL5 of the ILL register.

## 2.3 Block Diagram


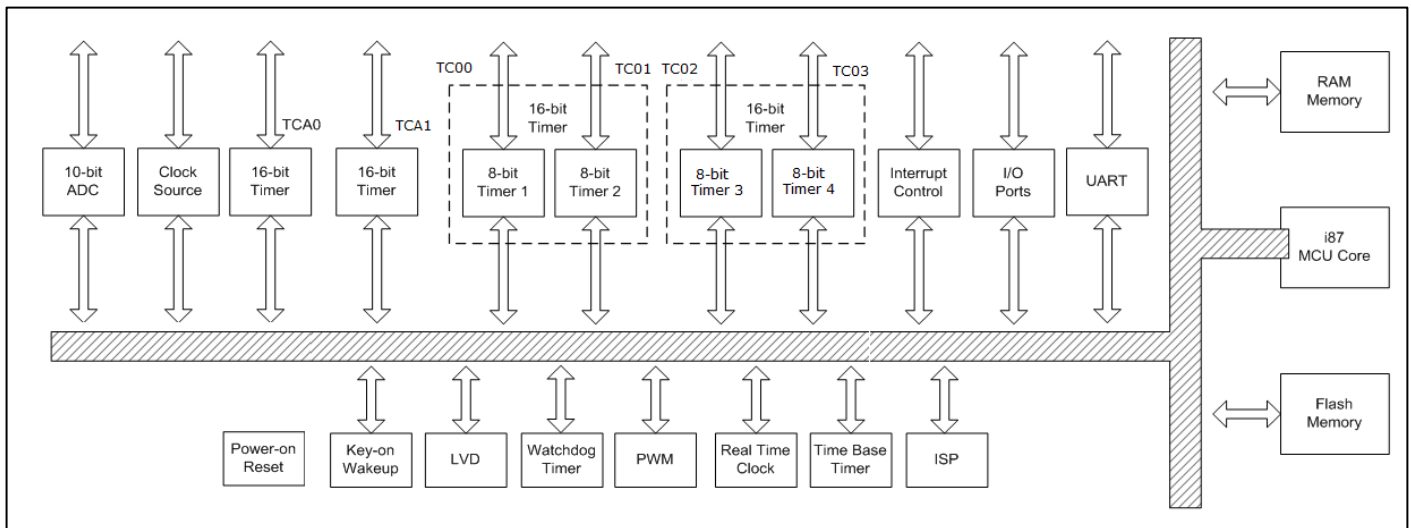


Figure 2.1 Block diagram of MQ6905

## 2.4 Pin Assignment / Description

### LQFP44 (10x10)

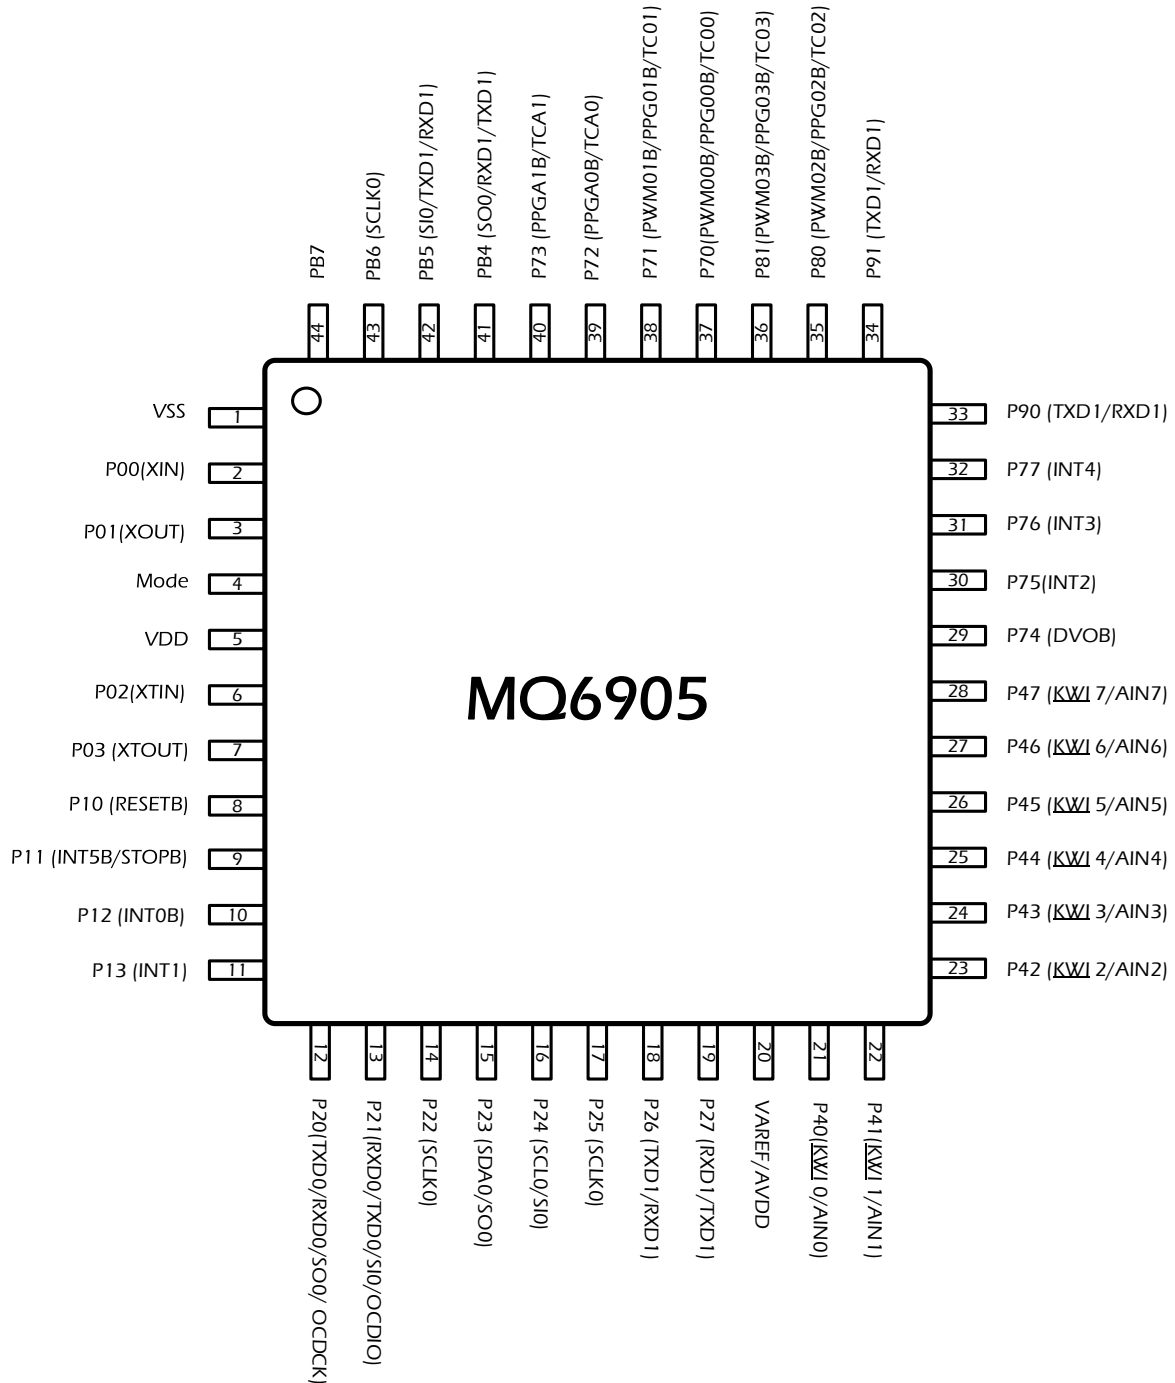

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

44-Pin No.	Pin Name/ Pin Option 1 (Note3)	I/O Type		Function Description
1	VSS	Power	–	Negative power supply / ground
2 3	P00(XIN) P01(XOUT)	I/O	Pull-up(Note 1) Ext. crystal (high)	P00 and P01 are bi-directional I/O pins, which are software configurable to be with pull-up resistors. XIN and XOUT are pin-shared with P00 and P01 respectively, and are connected to an high frequency external crystal for system clock.
4	Mode	I	Test mode	This pin is connected to VSS with 10Kohm resistor during user mode and connected to VDD during programming data into flash memory.
5	VDD	Power	–	Positive power supply
6 7	P02(XTIN) P03 (XTOUT)	I/O	Pull-up(Note 1) Ext. crystal (low)	P02 and P03 are bi-directional I/O pins, which are software configurable to be with pull-up resistors. XTIN and XTOUT are pin-shared with P02 and P03 respectively, and are connected to an low frequency external crystal for system clock.
8	P10 (RESETB)(Note 7)	I/O	Pull-up(Note 1)	P10 is a bi-directional I/O pin, which is software configurable to be with pull-up resistor. RESETB is pin-shared with P10, which is low-active.
9 10 11	P11 (INT5B/STOPB) (Note5) P12 (INT0B) P13 (INT1)	I/O	Pull-up(Note 1) Ext. interrupt	P11, P12 and P13 are bi-directional I/O pins, which are software configurable to be with pull-up resistors. INT5B/STOPB, INT0B and INT1 are pin-shared with P11, P12 and P13 respectively. INT0B, INT5B and STOPB are low-active.
12 13	P20 (TXD0/RXD0/SO0/ OCDCK) P21 (RXD0/TXD0/SI0/OCDIO)	I/O	Pull-up(Note 2) OCDE Serial data input Serial data output Open-drain	P20 and P21 are bi-directional I/O pins, which are software configurable to be with pull-up resistors. TXD0/RXD0/OCDCK(OCD clock input) and RXD0/TXD0/OCDIO(OCD data input/output) of UART I/Os are pin-shared with P20 and P21 respectively. Serial data output 0 (SO0) and serial data input 0 (SI0) are pin shared with P20 and P21 respectively.
14	P22 (SCLK0)	I/O	Serial clock input/output 0  Pull-up(Note 2) Open-drain	P22 is a bi-directional I/O pin, which is software configurable to be with pull-up resistors as input mode or open-drain output mode. Serial clock input/output 0 is pin-shared with P22.
15 16	P23 (SDA0/SO0)(Note 6) P24 (SCL0/SI0) (Note 6)	I/O	I2C Serial data input Serial data output Open-drain	P23 and P24 are bi-directional I/O pins. SDA0 ( I2C bus data input/output 0) and SCL0( I2C bus clock input/output 0) are pin-shared with P23 and P24 respectively. SO0 (serial data output) and SI0(serial data input) are pin-shared with P23 and P24.

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

44-Pin No.	Pin Name	Pin Option 1 (Note3)		I/O Type
17	P25 (SCLK0)	I/O	Serial clock input/output 0 Pull-up(Note 2) Open-drain	P25 is a bi-directional I/O pin, which is software configurable to be with pull-up resistors as input mode or open-drain output mode. Serial clock input/output 0 is pin-shared with P25.
18 19	P26 (TXD1/RXD1) P27 (RXD1/TXD1)	I/O	UART	P26 and P27 are bi-directional I/O pins. UART TXD1/RXD1 are pin shared with P26 and P27.
20	VAREF/AVDD	I	-	This pin is ADC external reference voltage (VREF) pin. <a href="#">This pin needs to be connected to VDD whether ADC is operating or not.</a>
21 22 23 24 25 26 27 28	P40(KW10/AIN0) P41(KW11/AIN1) P42 (KW12/AIN2) P43 (KW13/AIN3) P44 (KW14/AIN4) P45 (KW15/AIN5) P46 (KW16/AIN6) P47 (KW17/AIN7)	I/O	Pull-up(Note3) Wakeup ADC input	P40, P41, P42, P43, P44, P45, P46 and P47 are bi-directional I/O pins, which are software configurable to be with pull-up resistors. ADC input pins AIN0, AIN1, AIN2, AIN3, AIN4, AIN5, AIN6, AIN7 and wakeup pins KW10, KW11, KW12, KW13, KW14, KW15, KW16, KW17 are pin-shared with P40, P41, P42, P43, P44 P45, P46, P47 respectively.
29	P74 (DVOB)	I/O	Divider Output	P74 is a bi-directional I/O pin. DVOB is shared with P75.
30 31 32	P75(INT2) P76 (INT3) P77 (INT4)	I/O	Ext. interrupt	P75, P76 and P77 are bi-directional I/O pins. 3 interrupts INT2, INT3 and INT4 are shared with P75, P76 and P77.
33 34	P90 (TXD1/RXD1) P91 (TXD1/RXD1)	I/O	UART	P90 and P91 are bi-directional I/O pins. UART TXD1/RXD1 are pin shared with P90 and P91.
35 36	P80 (PWM02B/PPG02B/TC02) P81 (PWM03B/PPG03B/TC03)	I/O	Timer/Counter PWM PPG	P80 and P81 are bi-directional I/O pins. 8-bit timer/counter pins TC02/PWM02B/PPG02B and TC03/PWM03B/PPG03B are pin-shared with P80 and P81 respectively. PWM02B/PPG02B and PWM03B/PPG03B are low-active.
37 38	P70 (PWM00B/PPG00B/TC00) P71 (PWM01B/PPG01B/TC01)	I/O	Timer/Counter PWM PPG	P70 and P71 are bi-directional I/O pins. 8-bit timer/counter pins TC00/PWM00B/PPG00B and TC01/PWM01B/PPG01B are pin-shared with P70 and P71 respectively. PWM00B/PPG00B and PWM01B/PPG01B are low-active.
39 40	P72 (PPGA0B/TCA0) P73 (PPGA1B/TCA1)	I/O	Timer/Counter PWM PPG	P72 and P73 are bi-directional I/O pins. 16-bit timer/counter pin PPGA0B/TCA0 and PPGA1B/TCA1 are pin-shared with P72 and P73.

44-Pin No.	Pin Name	Pin Option 1 (Note3)		I/O Type
41 42	PB4 (SO0/RXD1/TXD1) PB5 (SI0/TXD1/RXD1)	I/O	Serial data output Serial data input UART	PB4 and PB5 are bi-directional I/O pins. Serial data output 0 (SO0) and UART (RXD1/TXD1) is pin-shared with PB4. Serial data input 0 (SI0) and UART (TXD1/RXD1) is pin-shared with PB5.
43	PB6 (SCLK0)	I/O	Serial clock input/output	PB6 is a bi-directional I/O pin. SCLK0 (Serial clock input/output) is pin-shared with PB6.
44	PB7	I/O	-	PB7 is a bi-directional I/O pin.

Note 1: Pull-up resistor is connected when the pin is set as input mode.

Note 2: Pull-up resistor is connected when the pin is set as input mode or open-drain output mode.

Note 3: Pull-up resistor is connected when the pin is set as input mode or wakeup.

Note 4: There are 6 pins needed to programming the data into flash memory: VDD, VSS, Mode, P10(RESETB), P20 and P21.

Note5: Please connect P11 (STOPB) to ground with a resistor (e.g. 10Kohm) otherwise MCU would be wake-up and couldn't be kept in STOP mode. This is because P11 will be set as input mode automatically in STOP mode operation. If P11 is set with pull-up resistor to VDD, STOP mode will be released.

Note 6: Please prevent P23 and P24 from being floated otherwise STOP mode current will be affected by additional leakage current in IO pads.

Note 7: After power-on, P10 is set to be RESETB function as default, and is software configurable to be I/O pin so please don't connect P10 to ground.

There are 2 recommended external application circuits and some suggestions for MQ6905:

1. VDD pin and AVDD pin need to be equal potential.
2. Mode pin need to be connected 10K ohm pull-down resistor.
3. When ADC function is used, the voltage signal connected to AIN should be through a resistor (100 ohm). Besides, 1nF capacitor should be added in AIN pins. The purpose is to filter the noise.
4. When ADC function is used, (10uF + 0.1uF) capacitors should be added in VAREF pin. The purpose is to filter noise and keep ADC external reference voltage (VAREF) stable.
5. Recommended copper pouring as grounding.
6. VDD pin and AVDD pin need to be equal potential. If the power sources of VDD and AVDD are different, 10uF and 0.1uF capacitor need to be connected respectively, 0.1uF capacitor should be close to IC as much as possible. (Figure 2.2)
7. VDD pin and AVDD pin need to be equal potential. If power source and the routing are the same, connecting 0.1uF capacitor where is near IC is recommended. (Figure 2.3)

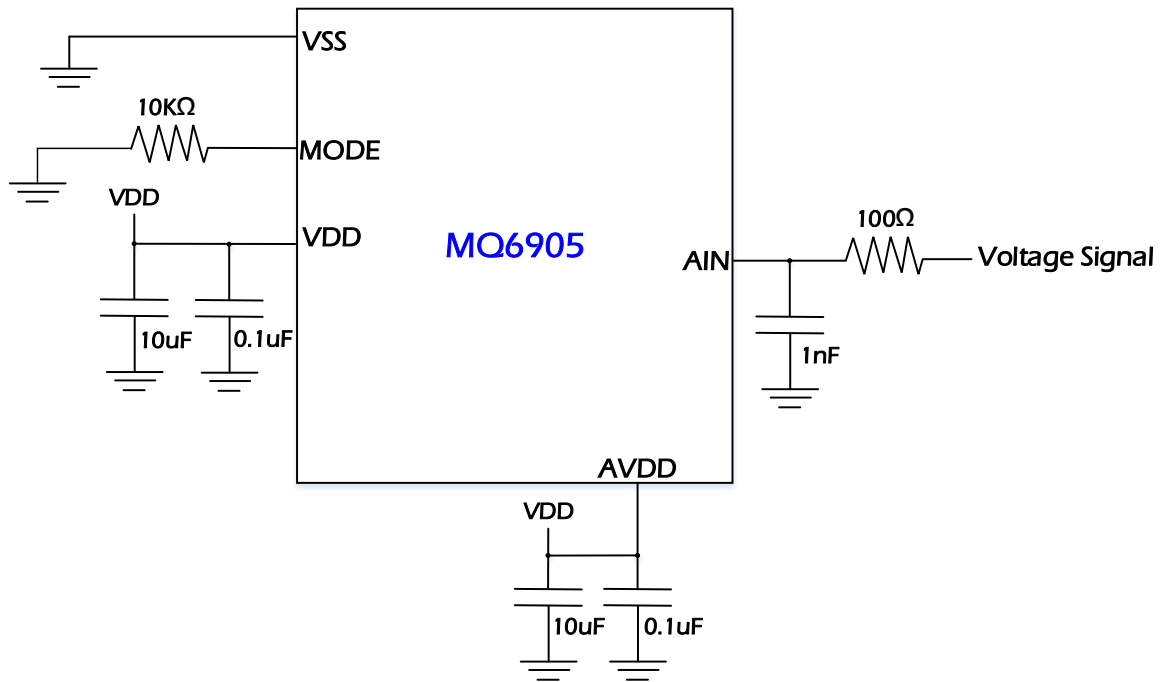


Figure 2.2 Recommended external circuit when using MQ6905 (different power sources for VDD & AVDD)

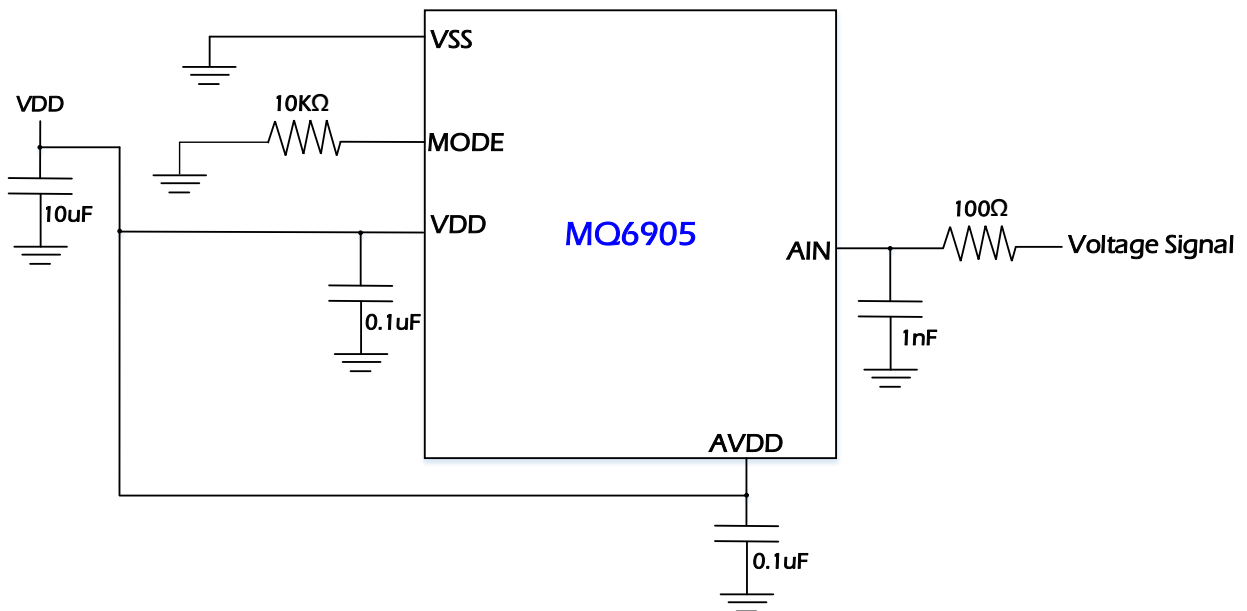


Figure 2.3 Recommended external circuit when using MQ6905 (same power source for VDD & AVDD)

### 3. Electronic Characteristics

#### 3.1 Absolute Maximum Ratings

The absolute maximum ratings are rated values which must not be exceeded during operation, even for an instant. Any one of the ratings must not be exceeded. If any absolute maximum rating is exceeded, a device may break down or its performance may be degraded, causing it to catch fire or explode resulting in injury to the user. Thus, when designing products which include this device, ensure that no absolute maximum rating value will ever be exceeded.

(V<sub>SS</sub> = 0V)

Parameter	Symbol	Pins	Ratings	Unit
Supply Voltage	V <sub>DD</sub>		-0.3 to 6.0	V
Input Voltage	V <sub>IN1</sub>	All I/O pins	-0.3 to V <sub>DD</sub> + 0.3	V
Output Voltage	V <sub>OUT</sub>	All I/O pins	-0.3 to V <sub>DD</sub> + 0.3	V
Output Current (per-pin)	I <sub>OUT1</sub>	P0, P1, P2 (excluding P23 and P24), P4, P7, P8, P9, PB (tri-state port)	-1.8	mA
	I <sub>OUT2</sub>	P0, P1, P2, P4, P9 (pull-up resistor)	-0.4	
	I <sub>OUT3</sub>	P0, P1, P2, P4, P9 (tri-state port)	3.2	
	I <sub>OUT4</sub>	P7, P8, PB (large current port)	30	
Output Current (total)	ΣI <sub>OUT1</sub>	P0, P1, P2 (excluding P23 and P24), P4, P7, P8, P9, PB (tri-state port)	-30	mA
	ΣI <sub>OUT2</sub>	P0, P1, P2, P4, P9 (pull-up resistor)	-4	
	ΣI <sub>OUT3</sub>	P0, P1, P2, P4, P9 (tri-state port)	60	
	ΣI <sub>OUT4</sub>	P7, P8, PB (large current port)	120	
Power dissipation (Topr = 85°C)	P <sub>D</sub>		250	mW
Soldering temperature (time)	T <sub>slid</sub>		260 (10 s)	°C
Storage Temperature	T <sub>STG</sub>		-40 to 125	
Operating Temperature	T <sub>OPR</sub>		-40 to 85	

#### 3.2 Operation Conditions

(V<sub>SS</sub> = 0V, T<sub>OPR</sub> = -40 to 85°C)

Parameter	Symbol	Pins	Condition	Min	Max	Unit
Supply Voltage	V <sub>DD</sub>		All operation modes	2.0	5.5	V
Input High Level	V <sub>IH</sub>	All I/O pins		V <sub>DD</sub> × 0.7	V <sub>DD</sub>	V
Input Low Level	V <sub>OUT</sub>	All I/O pins		0	V <sub>DD</sub> × 0.3	V
Clock Frequency	f <sub>C</sub>	XIN, XOUT	V <sub>DD</sub> = 2.0 to 5.5V	1.0	16	MHz
	f <sub>S</sub>	XTIN, XTOUT		30.0	34.0	KHz
	f <sub>OSC</sub> (Note)	Internal Oscillator	V <sub>DD</sub> = 2.0 to 5.5V, 0°C ~85°C	7.76	8.24	MHz
			V <sub>DD</sub> = 2.0 to 5.5V, -40°C ~85°C	7.68	8.32	MHz
f <sub>cgck</sub>		V <sub>DD</sub> = 2.0 to 5.5V	0.25	16	MHz	

### 3.3 D.C. Characteristics

( $V_{SS} = 0V$ ,  $T_{OPR} = -40$  to  $85^{\circ}C$ )

Parameter	Symbol	Pins	Condition	Min	Typ	Max	Unit
Hysteresis Voltage	$V_{HS}$	All IO pins	$V_{DD} = 5.5V$ $V_{IN} = 5.5V / 0V$	-	0.9	-	V
Input Current	$I_{IN1}$	MODE		-	-	$\pm 2$	$\mu A$
	$I_{IN2}$	P0, P1, P2, P4, P7, P8 P9, PB		-	-	$\pm 2$	$\mu A$
	$I_{IN3}$	RESETB, STOPB	-	-	$\pm 2$	$\mu A$	
Pull-up Resistance	$R_{UP1}$	P10 with RESETB enable	$V_{DD} = 5.5V$ $V_{IN} = 0V$	100	220	500	$K\Omega$
	$R_{UP2}$	P0, P1, P2 (excluding P23 and P24), P4		30	50	100	$K\Omega$
Output leakage current	$I_{LO1}$	P23, P24 (skin open drain port)	$V_{DD} = 5.5 V$ $V_{OUT} = 5.5 V$	-	-	2	$\mu A$
	$I_{LO2}$	P0, P1, P2 (excluding P23 and P24), P4, P5, P7, P8, P9, PB (tristate port)	$V_{DD} = 5.5 V$ $V_{OUT} = 5.5 V/0 V$	-	-	$\pm 2$	
Output high voltage	$V_{OH}$	Except P23, P24, XOUT, XTOUT	$V_{DD} = 4.5 V$ $I_{OH} = -0.7 mA$	4.1	-	-	V
Output low voltage	$V_{OL}$	Except XOUT, XTOUT	$V_{DD} = 4.5 V$ $I_{OL} = 1.6 mA$	-	-	0.4	
Output Current	$I_{OL1}$	P7, P8, PB (large current port)	$V_{DD} = 4.5 V$ $V_{OL} = 1.0 V$	-	20	-	mA

Note 1: Typical values shows those at  $T_{OPR} = 25^{\circ}C$  and  $V_{DD} = 5.0V$ .

Note 2: Input current  $I_{IN3}$ : The current through pull-up resistor is not included.

Note 3:  $V_{IN}$ : The input voltage on the pin except MODE pin,  $V_{MODE}$ : The input voltage on the MODE pin

(V<sub>SS</sub> = 0V, T<sub>OPR</sub> = -40 to 85°C)

Parameter	Symbol	Condition	Min	Typ	Max	Unit	
Supply Current in NORMAL 1, 2 modes	I <sub>DD</sub>	V <sub>DD</sub> = 5.5V f <sub>cgck</sub> = 16.0 MHz f <sub>s</sub> = 32.768 KHz	-	5.0	8.0	mA	
Supply Current in IDLE0, 1, 2 modes			-	3.0	4.5		
Supply Current in NORMAL 1, 2 modes		V <sub>DD</sub> = 5.5V f <sub>cgck</sub> = 8.0 MHz f <sub>s</sub> = 32.768 KHz	-	3.5	5.5		
Supply Current in IDLE0, 1, 2 modes			-	2.0	3.5		
Supply Current in SLOW1 modes (Note 3)		I <sub>DD</sub>	V <sub>DD</sub> = 3.0V f <sub>s</sub> = 32.768 KHz	-	40	150	μA
Supply Current in SLEEP1 modes				-	25	145	
Supply Current in SLEEP0 modes				-	20	145	
Supply Current in STOP modes			V <sub>DD</sub> = 5.5V (-40 to 85°C)	-	10	120	
	V <sub>DD</sub> = 5.5V (-40 to 40°C)		-	10	35		

Note 1): Typical values shown are T<sub>OPR</sub> = 25°C and V<sub>DD</sub> = 5.0V, unless otherwise specified.

Note 2): V<sub>IN</sub>: The input voltage on I/O pins.

Note 3): Each supply current in SLOW2 mode is equivalent to that in IDLE0, IDLE1 and IDLE2 modes.

### 3.4 AD Conversion Characteristics

(V<sub>SS</sub> = 0V, 2.7V ≤ V<sub>DD</sub> ≤ 5.5V, T<sub>OPR</sub> = 25°C)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Analog Reference Voltage	V <sub>AREF</sub> /A <sub>VDD</sub>	-	V <sub>DD</sub>			V
Analog input voltage range	V <sub>AIN</sub>	-	V <sub>SS</sub>	-	V <sub>AREF</sub>	V
Conversion Time		-	-	16.0	-	μs
Differential Nonlinearity Error		-	-	-	±2.0	LSB
Integral Nonlinearity Error		-	-	-	±2.0	LSB
Zero Point Error		-	-	-	±2.0	LSB
Full Scale Error		-	-	-	±2.0	LSB
Total Error		-	-	-	±2.0	LSB

( $V_{SS} = 0V, 1.8V \leq V_{DD} < 2.7V, T_{OPR} = 25^{\circ}C$ )

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Analog Reference Voltage	$V_{AREF}/A_{VDD}$	–	$V_{DD}$			V
Analog input voltage range	$V_{AIN}$	–	$V_{SS}$	–	$V_{AREF}$	V
Conversion Time		–	–	32.0	–	$\mu s$
Differential Nonlinearity Error		–	–	–	$\pm 4.0$	LSB
Integral Nonlinearity Error		–	–	–	$\pm 4.0$	LSB
Zero Point Error		–	–	–	$\pm 4.0$	LSB
Full Scale Error		–	–	–	$\pm 4.0$	LSB
Total Error		–	–	–	$\pm 4.0$	LSB

*Note 1): The total error includes all errors except a quantization error, and is defined as the maximum deviation from the ideal conversion line.*

*Note 2): The voltage to be input to the AIN input pin must be within the range  $V_{AREF}$  to  $V_{SS}$ . If a voltage outside this range is input, converted values will become indeterminate, and converted values of other channels will be affected.*

*Note 3): If the AD converter is not used, fix the pin to the  $V_{DD}$  level.*

*Note 4) When using ADC, please refer to 「Figure 2.2 Recommended external circuit when using MQ6905」.*

### 3.5 Flash Characteristics

( $V_{SS} = 0V, 2.0V \leq V_{DD} \leq 5.5V, T_{OPR} = -40$  to  $85^{\circ}C$ )

Parameter	Condition	Min	Typ	Max	Unit
Number of guaranteed writes to flash memory		–	–	100,000	Times
Flash memory write time		–	–	40	$\mu s$
Flash memory erase time	Chip erase	–	–	40	ms
	Block erase (1KB)			40	
	Sector erase (128 Bytes)	–	–	5	

### 3.6 MTP Characteristics

( $V_{SS} = 0V, 2.0V \leq V_{DD} \leq 5.5V, T_{OPR} = -40$  to  $85^{\circ}C$ )

Parameter	Condition	Min	Typ	Max	Unit
Number of guaranteed writes to MTP		–	–	20,000	Times
MTP write time		–	–	40	$\mu s$
MTP memory erase time	Chip erase	–	–	40	ms
	Block erase (1KB)			40	
	Sector erase (128 Bytes)	–	–	5	

## 4. Central Processing Unit (CPU)

### 4.1 General Concept

MQ6905 adopts i87 8-bit MCU core with embedded Flash memory (16KB, i.e. 16384 bytes). Besides, MQ6905 also has 16368 bytes of MTP (multi-times programmable memory). The introduction of the powerful central processing unit (CPU) can be divided into eight major parts: (1) Addressing Space of Program / Data Memory and Special Function Registers (SFR), (2) Operation Modes, (3) Stack Area / Pointer, (4) Program Counter (PC), (5) General Purpose Registers, (6) Program Status Word (PSW), (7) Low Power Consumption Function and (8) Key-on Wakeup.

### 4.2 Addressing Space

Figure 4.1 shows the addressing space of MQ6905, including SRF 1, SRF2, SFR3, RAM and program memory (Flash) memory.

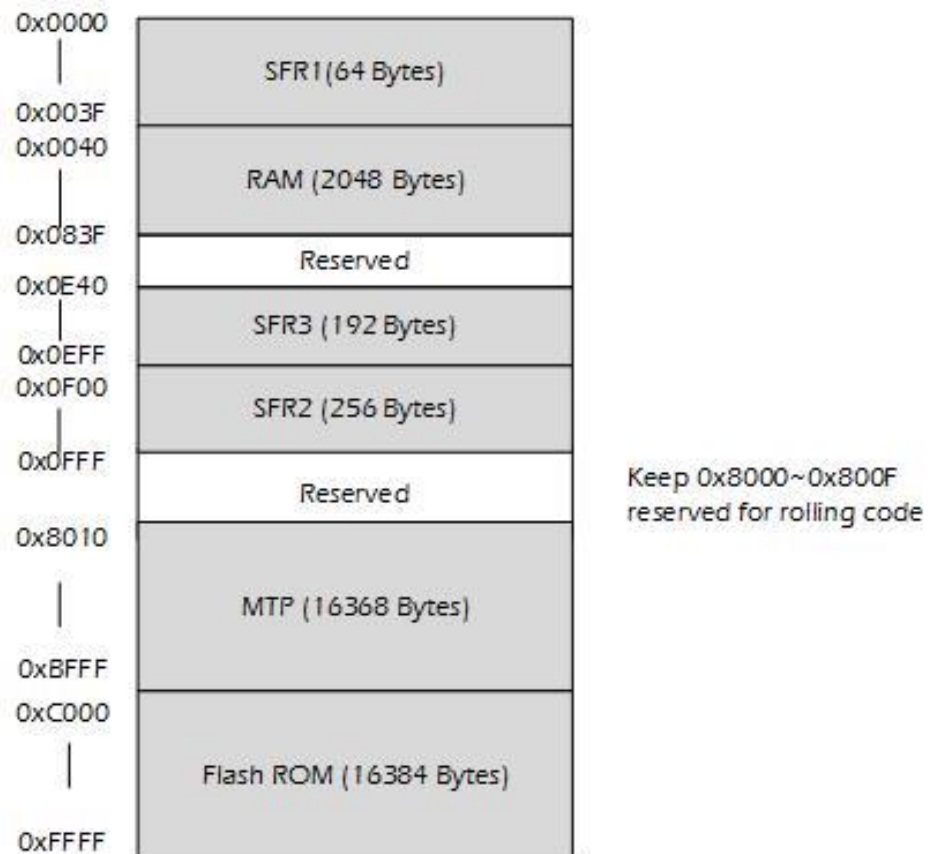


Figure 4.1 Addressing Map of MQ6905

#### 4.2.1 Program Memory - Flash

The program memory (Flash) is used to store the program instructions which are to be executed. It also contains data, table, and interrupt entries, and is organized into 8K + 128 bytes format which is addressed by the PC and table pointer. The Flash ranges from 0xC000 to 0xFFFF (16K bytes).

Certain locations in the Flash are reserved for special usage:

Location 0xFFFFE is reserved for program initialization. After chip reset, the program always begins execution at this location.

Location 0xFFFFC is reserved for the software / undefined instruction interrupt service program. If the software / undefined instruction output pin is activated and if the interrupt is enabled and the stack is not full, the program begins execution at location 0xFFFFC.

Location 0xFFFF8 is reserved for the WDT interrupt service program. If the WDT output pin is activated, and if the interrupt is enabled and the stack is not full, the program begins execution at location 0xFFFF8.

Location 0xFFFF6 is reserved for the wakeup interrupt service program. If the wakeup output pin is activated, and if the interrupt is enabled and the stack is not full, the program begins execution at location 0xFFFF6.

Location 0xFFFF4 is reserved for the time-base timer (TBT) interrupt service program. If the TBT output pin is activated, and if the interrupt is enabled and the stack is not full, the program begins execution at location 0xFFFF4.

Location 0xFFEC is reserved for the voltage detection interrupt service program. If the voltage detection output pin is activated, and if the interrupt is enabled and the stack is not full, the program begins execution at location 0xFFEC.

Location 0xFFEA is reserved for the analog to digital converter (ADC) interrupt service program. If the ADC output pin is activated, and if the interrupt is enabled and the stack is not full, the program begins execution at location 0xFFEA.

Location 0xFFE8 is reserved for the RTC service program. If the RTC output pin is activated, and if the interrupt is enabled and the stack is not full, the program begins execution at location 0xFFE8.

Location 0xFFE6 is reserved for the TC00 interrupt service program. If the TC00 output pin is activated, and if the interrupt is enabled and the stack is not full, the program begins execution at location 0xFFE6.

Location 0xFFE4 is reserved for the TC01 interrupt service program. If the TC01 output pin is activated, and if the interrupt is enabled and the stack is not full, the program begins execution at location

0xFFE4.

Location 0xFFE2 is reserved for the TCA0 interrupt service program. If the TCA0 output pin is activated, and if the interrupt is enabled and the stack is not full, the program begins execution at location 0xFFE2.

Location 0xFFDE is reserved for the external interrupt 0 service program. If the INTO output pin is activated, and if the interrupt is enabled and the stack is not full, the program begins execution at location 0xFFDE.

Location 0xFFDC is reserved for the external interrupt 1 service program. If the INT1 output pin is activated, and if the interrupt is enabled and the stack is not full, the program begins execution at location 0xFFDC..

Location 0xFFD2 is reserved for the UART Receiver 1 (INTRXD1) interrupt service program. If the INTRXD1 output pin is activated, and if the interrupt is enabled and the stack is not full, the program begins execution at location 0xFFD2.

Location 0xFFD0 is reserved for the UART Transmitter 1 (INTTXD1) interrupt service program. If the INTTXD1 output pin is activated, and if the interrupt is enabled and the stack is not full, the program begins execution at location 0xFFD0.

Location 0xFFCE is reserved for the TC02 interrupt service program. If the TC02 output pin is activated, and if the interrupt is enabled and the stack is not full, the program begins execution at location 0xFFCE.

Location 0xFFCC is reserved for the TC03 interrupt service program. If the TC03 output pin is activated, and if the interrupt is enabled and the stack is not full, the program begins execution at location 0xFFCC.

## 4.2.2 Data Memory - RAM

The RAM is mapped to 0x0040 to 0x083F (2048 bytes) in the data area after reset release. Note that the contents of the RAM become unstable when the power is turned on and immediately after a reset is released. To execute the program by using the RAM, transfer the program to be executed in the initialization routine.

## 4.2.3 Special Function Register - SFR

The SFR is mapped to 0x0000 to 0x003F (SFR1), 0x0F00 to 0x0FFF (SFR2) and 0x0E40 to 0x0EFF (SFR3) in the data area after reset release.

SFR1		SFR2		SFR2	
0x0000	P0DR	0x0F00	Reserved	0x0F80	Reserved
0x0001	P1DR	~	Reserved	0x0F81	Reserved
0x0002	P2DR	0x0F19	Reserved	0x0F82	Reserved
0x0003	Reserved	0x0F1A	P0CR	0x0F83	Reserved
0x0004	P4DR	0x0F1B	P1CR	0x0F84	Reserved
0x0005	Reserved	0x0F1C	P2CR	0x0F85	Reserved
0x0006	Reserved	0x0F1D	Reserved	0x0F86	Reserved
0x0007	P7DR	0x0F1E	P4CR	0x0F87	Reserved
0x0008	P8DR	0x0F1F	Reserved	0x0F88	T02REG
0x0009	P9DR	0x0F20	Reserved	0x0F89	T03REG
0x000A	Reserved	0x0F21	P7CR	0x0F8A	T02PWM
0x000B	PBDR	0x0F22	P8CR	0x0F8B	T03PWM
0x000C	Reserved	0x0F23	P9CR	0x0F8C	T02MOD
0x000D	POPRD	0x0F24	Reserved	0x0F8D	T03MOD
0x000E	P1PRD	0x0F25	PBCR	0x0F8E	T023CR
0x000F	P2PRD	0x0F26	Reserved	0x0F8F	Reserved
0x0010	Reserved	0x0F27	POPU	~	Reserved
0x0011	P4PRD	0x0F28	P1PU	0x0FA8	TA1DRAL
0x0012	Reserved	0x0F29	P2PU	0x0FA9	TA1DRAH
0x0013	Reserved	0x0F2A	Reserved	0x0FAA	TA1DRBL
0x0014	P7PRD	0x0F2B	P4PU	0x0FAB	TA1DRBH
0x0015	P8PRD	0x0F2C	Reserved	0x0FAC	TA1MOD
0x0016	P9PRD	0x0F2D	Reserved	0x0FAD	TA1CR
0x0017	Reserved	0x0F2E	Reserved	0x0FAE	TA1SR
0x0018	PBPRD	0x0F2F	Reserved	~	Reserved
0x0019	Reserved	0x0F30	P9PU	0x0FC3	Reserved
0x001A	UARTOCR1	0x0F31	Reserved	0x0FC4	KWUCR0
0x001B	UARTOCR2	0x0F32	Reserved	0x0FC5	KWUCR1
0x001C	UARTODR	0x0F33	Reserved	0x0FC6	VDCR1
0x001D	UARTOSR	0x0F34	P0FC	0x0FC7	VDCR2
0x001E	TD0BUF/RD0BUF	0x0F35	Reserved	0x0FC8	RTCCR
0x001F	Reserved	0x0F36	P2FC	0x0FC9	Reserved
0x0020	Reserved	0x0F37	Reserved	0x0FCA	Reserved
0x0021	Reserved	0x0F38	P4FC	0x0FCB	SERSEL
0x0022	SBIOCR1	0x0F39	Reserved	0x0FCC	IRSTSR
0x0023	SBIOCR2/SBIOSR2	0x0F3A	Reserved	0x0FCD	WUCCR
0x0024	I2COAR	0x0F3B	P7FC	0x0FCE	WUCDR
0x0025	SBI0DBR	0x0F3C	P8FC	0x0FCF	CGCR
0x0026	T00REG	0x0F3D	P9FC	0x0FD0	FLSCR1
0x0027	T01REG	0x0F3E	Reserved	0x0FD1	FLSCR2/FLSCRM
0x0028	T00PWM	0x0F3F	PBFC	0x0FD2	FLSSTB
0x0029	T01PWM	0x0F40	Reserved	0x0FD3	SPCR
0x002A	T00MOD	0x0F41	Reserved	0x0FD4	WDCTR
0x002B	T01MOD	0x0F42	Reserved	0x0FD5	WDCDR
0x002C	T001CR	0x0F43	P2OUTCR	0x0FD6	WDCNT
0x002D	TA0DRAL	~	Reserved	0x0FD7	WDST
0x002E	TA0DRAH	0x0F49	Reserved	0x0FD8	EINTCR1
0x002F	TA0DRBL	0x0F4A	P9OUTCR	0x0FD9	EINTCR2
0x0030	TA0DRBH	0x0F4B	Reserved	0x0FDA	EINTCR3
0x0031	TA0MOD	0x0F4C	PBOUTCR	0x0FDB	EINTCR4
0x0032	TA0CR	0x0F4D	Reserved	0x0FDC	SYSCR1
0x0033	TA0SR	0x0F53	Reserved	0x0FDD	SYSCR2
0x0034	ADCCR1	0x0F54	UART1CR1	0x0FDE	SYSCR3
0x0035	ADCCR2	0x0F55	UART1CR2	0x0FDF	SYSCR4/SYSSR4
0x0036	ADCDRL	0x0F56	UART1DR	0x0FE0	ILL
0x0037	ADCDRH	0x0F57	UART1SR	0x0FE1	ILH
0x0038	DVOCR	0x0F58	TD1BUF/RD1BUF	0x0FE2	ILE
0x0039	TBTCR	0x0F59	Reserved	0x0FE3	ILD
0x003A	EIRL	~	Reserved	0x0FE4	Reserved
0x003B	EIRH	0x0F73	Reserved	~	Reserved
0x003C	EIRE	0x0F74	POFFCR0	0x0FEF	Reserved
0x003D	EIRD	0x0F75	POFFCR1	0x0FF0	ILPRS1
0x003E	Reserved	0x0F76	POFFCR2	0x0FF1	ILPRS2
0x003F	PSW	0x0F77	POFFCR3	0x0FF2	ILPRS3
		0x0F78	Reserved	0x0FF3	ILPRS4
		0x0F79	Reserved	0x0FF4	ILPRS5
		0x0F7A	Reserved	0x0FF5	ILPRS6
		0x0F7B	Reserved	0x0FF6	Reserved
		0x0F7C	Reserved	~	Reserved
		0x0F7D	Reserved	0x0FFF	Reserved
		0x0F7E	Reserved		
		0x0F7F	Reserved		

SFR3	
0x0E40	Reserved
~	Reserved
0x0E56	Reserved
0x0E57	UATCNG
0x0E58	Reserved
~	Reserved
0x0EFF	Reserved

Note: Don't access the reserved SFR.  
Figure 4.2 SFR1, SFR2, and SFR3

## 4.3 Operation Modes

### 4.3.1 Operation Mode Control Circuit

The operation mode control circuit starts and stops the oscillation circuits for the high-frequency and low-frequency clocks, and switches the main system clock (fm). There are three operating modes: the single-clock mode, the dual-clock mode and the STOP mode. These modes are controlled by the system control registers (SYSCR1 and SYSCR2).

Figure 4.3 shows the operating mode transition diagram.

#### 4.3.1.1 Single-clock Mode

Only the gear clock (fcgck) is used for the operation in the single-clock mode. The main system clock (fm) is generated from the gear clock (fcgck). Therefore, the machine cycle is  $1/\text{fcgck}$  [s].

The gear clock (fcgck) is generated from the high-frequency clock (fc).

##### (a) NORMAL1 Mode

In this mode, the CPU core and the peripheral circuits operate using the gear clock (fcgck). The NORMAL1 mode becomes active after reset release.

##### (b) IDLE1 Mode

In this mode, the CPU and the watchdog timer stop and the peripheral circuits operate using the gear clock (fcgck).

The IDLE1 mode is activated by setting SYSCR2 <IDLE> to "1" in the NORMAL1 mode. When the IDLE1 mode is activated, the CPU and the watchdog timer stop. When the interrupt latch enabled by the interrupt enable register EIR becomes "1", the IDLE1 mode is released to the NORMAL1 mode.

When the IMF (interrupt master enable flag) is "1" (interrupts enabled), the operation returns normal after the interrupt processing is completed. When the IMF is "0" (interrupts disabled), the operation is restarted by the instruction that follows the IDLE1 mode activation instruction.

##### (c) IDLE0 Mode

In this mode, the CPU and the peripheral circuits stop, except the oscillation circuits and the time base timer.

In the IDLE0 mode, the peripheral circuits stop in the states when the IDLE0 mode is activated or become the same as the states when a reset is released. For operations of the peripheral circuits in the IDLE0 mode, refer to the section of each peripheral circuit.

The IDLE0 mode is activated by setting SYSCR2 <TGHALT> to "1" in the NORMAL1 mode.

When the IDLE0 mode is activated, the CPU stops and the timing generator stops the clock supply to the peripheral circuits except the time base timer.

When the falling edge of the source clock selected at TBTCR <TBTCK> is detected, the IDLE0 mode is released, the timing generator starts the clock supply to all the peripheral circuits and the NORMAL1 mode is restored.

Note that the IDLE0 mode is activated and restarted, regardless of the setting of TBTCR <TBTEN>.

When the IDLE0 mode is activated with TBTCR <TBTEN> set at "1", the INTTBT interrupt latch is set after the NORMAL mode is restored. When the IMF is "1" and the EF5 (the individual interrupt enable flag for the time base timer) is "1", the operation returns normal after the interrupt processing is completed.

When the IMF is "0" or when the IMF is "1" and the EF5 (the individual interrupt enable flag for the time base timer) is "0", the operation is restarted by the instruction that follows the IDLE0 mode activation instruction.

#### 4.3.1.2 Dual-clock Mode

The gear clock (fcgck) and the low-frequency clock (fs) are used for the operation in the dual-clock mode.

The main system clock (fm) is generated from the gear clock (fcgck) in the NORMAL2 or IDLE2 mode, and generated from the clock that is a quarter of the low-frequency clock (fs) in the SLOW1/2 or SLEEP0/1 mode. Therefore, the machine cycle time is  $1/\text{fcgck}$  [s] in the NORMAL2 or IDLE2 mode and is  $4/\text{fs}$  [s] in the SLOW1/2 or SLEEP0/1 mode.

The operation of the MCU core becomes the single-clock mode after reset release. To operate it in the dual-clock mode, allow the low-frequency clock to oscillate at the beginning of the program.

##### (a) NORMAL2 Mode

In this mode, the CPU core operates using the gear clock (fcgck), and the peripheral circuits operate using the gear clock (fcgck) or the clock that is a quarter of the low-frequency clock (fs).

##### (b) SLOW2 Mode

In this mode, the CPU core and the peripheral circuits operate using the clock that is a quarter of the low-frequency clock (fs).

In the SLOW mode, some peripheral circuits become the same as the states when a reset is released. For operations of the peripheral circuits in the SLOW mode, refer to the section of each peripheral circuit.

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

Set SYSCR2 <SYSCK> to switch the operation mode from NORMAL2 to SLOW2 or from SLOW2 to NORMAL2. In the SLOW2 mode, outputs of the prescaler and stages 1 to 8 of the divider stop.

**(c) SLOW1 Mode**

In this mode, the high-frequency clock oscillation circuit stops operation and the CPU core and the peripheral circuits operate using the clock that is a quarter of the low-frequency clock (fs).

This mode requires less power to operate the high-frequency clock oscillation circuit than in the SLOW2 mode.

In the SLOW mode, some peripheral circuits become the same as the states when a reset is released. For operations of the peripheral circuits in the SLOW mode, refer to the section of each peripheral circuit.

Set SYSCR2 <XEN> to switch the operation between the SLOW1 and SLOW2 modes. In the SLOW1 or SLEEP1 mode, outputs of the prescaler and stages 1 to 8 of the divider stop.

**(d) IDLE2 Mode**

In this mode, the CPU and the watchdog timer stop and the peripheral circuits operate using the gear clock (fcgck) or the clock that is a quarter of the low-frequency clock (fs).

The IDLE2 mode can be activated and released in the same way as for the IDLE1 mode. The operation returns to the NORMAL2 mode after this mode is released.

**(e) SLEEP1 Mode**

In this mode, the high-frequency clock oscillation circuit stops operation, the CPU and the watchdog timer stop, and the peripheral circuits operate using the clock that is a quarter of the low-frequency clock (fs).

In the SLEEP1 mode, some peripheral circuits become the same as the states when a reset is released. For operations of the peripheral circuits in the SLEEP1 mode, refer to the section of each peripheral circuit. The SLEEP1 mode can be activated and released in the same way as for the IDLE1 mode. The operation returns to the SLOW1 mode after this mode is released.

In the SLOW1 or SLEEP1 mode, outputs of the prescaler and stages 1 to 8 of the divider stop.

**(f) SLEEP0 Mode**

In this mode, the high-frequency clock oscillation circuit stops operation, the time base timer operates using the clock that is a quarter of the low-frequency clock (fs), and the core and the peripheral circuits stop.

In the SLEEP0 mode, the peripheral circuits stop in the states when the SLEEP0 mode is activated or become the same as the states when a reset is released. For operations of the

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

peripheral circuits in the SLEEP0 mode, refer to the section of each peripheral circuit. The SLEEP0 mode can be activated and released in the same way as for the IDLE0 mode. The operation returns to the SLOW1 mode after this mode is released.

In the SLEEP0 mode, the CPU stops and the timing generator stops the clock supply to the peripheral circuits except the time base timer.

#### 4.3.1.3 STOP Mode

In this mode, all the operations in the system including the oscillation circuits are stopped and the internal states in effect before the system was stopped are held with low power consumption.

In the STOP mode, the peripheral circuits stop in the states when the STOP mode is activated or become the same as the states when a reset is released. For operations of the peripheral circuits in the STOP mode, refer to the section of each peripheral circuit. The STOP mode is activated by setting SYSCR1 <STOP> to "1".

The STOP mode is released by the STOP mode release signals. After the warm-up time has elapsed, the operation returns to the mode that was active before the STOP mode, and the operation is restarted by the instruction that follows the STOP mode activation instruction.

#### 4.3.1.4 Transition of Operation Modes

Operation mode		Oscillation circuit		CPU core	Watchdog timer	Time base timer	Other peripheral circuits	Machine cycle time				
		High-frequency	Low-frequency									
Single clock	RESET	Oscillation	Stop	Reset	Reset	Reset	Reset	1 / f <sub>cgck</sub> [s]				
	NORMAL1			Operate	Operate	Operate	Operate					
	IDLE1			Stop	Stop				Operate	Stop		
	IDLE0											
	STOP	Stop	Stop	Stop	Stop	Stop						
Dual clock	NORMAL2	Oscillation	Oscillation	Operate with the high frequency	Operate with the high/low frequency	Operate	Operate	1 / f <sub>cgck</sub> [s]				
	IDLE2			Stop	Stop							
	SLOW2			Operate with the low frequency	Operate with the low frequency							
	SLOW1	Stop	Oscillation	Operate with the low frequency	Operate with the low frequency			Operate	Operate	4 / f <sub>s</sub> [s]		
	SLEEP1			Stop	Stop						Operate	Operate
	SLEEP0											
	STOP			Stop	Stop	Stop	Stop				Stop	

Table 4.1 Operation Modes and Conditions

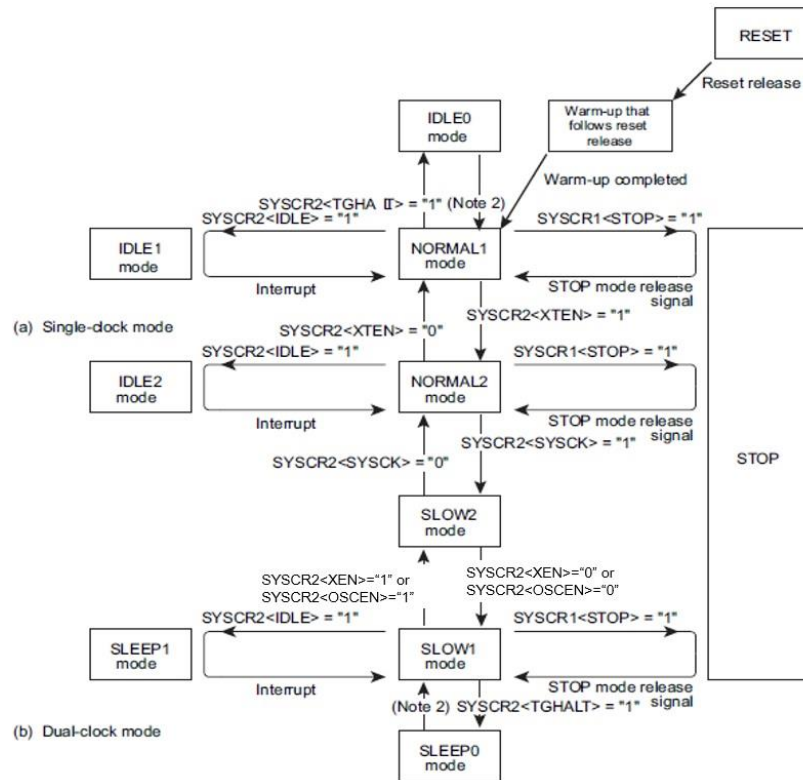


Figure 4.3 Operation Mode Transition Diagram

Note 1): The NORMAL1 and NORMAL2 modes are generically called the NORMAL mode; the SLOW1 and SLOW2 modes are called the SLOW mode; the IDLE0, IDLE1 and IDLE2 modes are called the IDLE mode; and the SLEEP0 and SLEEP1 are called the SLEEP mode.

Note 2): The mode is released by the falling edge of the source clock selected at TBTCR <TBTK>.

### 4.3.2 Operation Mode Control

#### 4.3.2.1 STOP Mode

The STOP mode is controlled by system control register 1 (SYSCR1) and the STOP mode release signals.

##### (a) Start the STOP Mode

The STOP mode is started by setting SYSCR1<STOP> to "1". In the STOP mode, the following states are maintained:

1. Both the high-frequency and low-frequency clock oscillation circuits stop oscillation and all internal operations are stopped.
2. The data memory, the registers and the program status word are all held in the states in effect before STOP mode was started. The port output latch is determined by the value of SYSCR1 <OUTEN>.

3. The prescaler and the divider of the timing generator are cleared to "0".
4. The program counter holds the address of the instruction 2 ahead of the instruction (e.g., [SET (SYSCR1).7]) which started the STOP mode.

#### (b) Release the STOP Mode

The STOP mode is released by the following STOP mode release signals. It is also released by a reset by the RESETB pin, a power-on reset and a reset by the voltage detection circuits. When a reset is released, the warm-up starts. After the warm-up is completed, the NORMAL1 mode becomes active.

1. Release by the STOPB pin
2. Release by key-on wakeup
3. Release by the voltage detection circuits

*Note): During the STOP period (from the start of the STOP mode to the end of the warm-up), due to changes in the external interrupt pin signal, interrupt latches may be set to "1" and interrupts may be accepted immediately after the STOP mode is released. Before starting the STOP mode, therefore, disable interrupts. Also, before enabling interrupts after STOP mode is released, clear unnecessary interrupt latches.*

#### 1. Release by the STOPB pin

Release the STOP mode by using the STOPB pin.

To release the STOP mode by using the STOPB pin, set VDCCR2 <VDSS> to "00" or "10". (For details of VDCCR2, refer to "5.3 Voltage Detection Circuits")

The STOP mode released by the STOPB pin includes the level-sensitive release mode and the edge-sensitive release mode, either of which can be selected at SYSCR1 <RELM>.

The STOPB pin is also used as the P11 and the INT5B (external interrupt input 5) pin.

##### ◆ Level-sensitive release mode

The STOPB mode is released by setting the STOPB pin high.

Setting SYSCR1 <RELM> to "1" selects the level-sensitive release mode.

This mode is used for the capacitor backup when the main power supply is cut off and the long term battery backup.

Even if an instruction for starting the STOP mode is executed while the STOPB pin input is high, the STOP mode does not start. Thus, to start the STOP mode in the level- release mode, it is necessary for the program to first confirm that the STOPB pin input is low. This can be confirmed by testing the port by the software or using interrupt.

◆ **Edge-sensitive release mode**

In this mode, the STOP mode is released at the rising edge of the STOP pin input. Setting SYSCR1 <RELM> to "0" selects the edge-sensitive release mode.

This is used in applications where a relatively short program is executed repeatedly at periodic intervals. This periodic signal (such as a clock from a low-power consumption oscillator) is input to the STOPB pin. In the edge-sensitive release mode, the STOP mode is started even when the STOPB pin input is high.

**2. Release by the Key-on Wakeup**

The STOP mode is released by inputting the prescribed level to the key-on wakeup pin. The level to release the STOP mode can be selected from "H" and "L". For release by the key-on wakeup, refer to "3.7 Key-on Wakeup" in iMQ i87 User Manual.

*Note): If the key-on wakeup pin input becomes the opposite level to the release level after the warm-up starts, the STOP mode is not restarted.*

**3. Release by the Voltage Detection Circuits**

The STOP mode is released by the supply voltage detection by the voltage detection circuits. To release the STOP mode by using the voltage detection circuits, set VDCR2 <VDSS> to "01" or "10". If the voltage detection operation mode of the voltage detection circuits is set to generate reset signals (when VDCR2 <VDxMOD> is 1 (x=1 to 2)), the STOP mode is re-leased and a reset is applied as soon as the supply voltage becomes lower than the detection voltage.

When the supply voltage becomes equal to or higher than the detection voltage of the voltage detection circuits, the reset is released and the warm-up starts. After the warm-up is completed, the NORMAL1 mode becomes active.

If the voltage detection operation mode of the voltage detection circuits is set to generate interrupt request signals (when VDCR2 <VDxMOD> is 0 (x=1 to 2)), the STOP mode is released when the supply voltage becomes equal to or higher than the detection voltage. For details, refer to the section of the voltage detection circuits.

*Note): If the supply voltage becomes equal to or higher than the detection voltage within 1 machine cycle after SYSCR1 <STOP> is set to "1", the STOP mode will not be released.*

**(c) STOP Mode Release Operation**

Operation mode before the STOP mode is started		High-frequency clock	Low-frequency clock	Oscillation start operation after release
Single-clock mode	NORMAL1	High-frequency clock oscillation circuit	-	The high-frequency clock oscillation circuit starts oscillation. The low-frequency clock oscillation circuit stops oscillation.
Dual-clock mode	NORMAL2	High-frequency clock oscillation circuit	Low-frequency clock oscillation circuit	The high-frequency clock oscillation circuit starts oscillation. The low-frequency clock oscillation circuit starts oscillation.
	SLOW1	-	Low-frequency clock oscillation circuit	The high-frequency clock oscillation circuit stops oscillation. The low-frequency clock oscillation circuit starts oscillation.

**Table 4.2 Oscillation Start Operation at Release of the STOP Mode**

*Note): When the operation returns to the NORMAL2 mode, fc is input to the frequency division circuit of the warm-up counter.*

The STOP mode is released in the following sequence:

1. Oscillation starts. For the oscillation start operation in each mode, refer to "Table 4.2 Oscillation Start Operation at Release of the STOP Mode".
2. Warm-up is executed to secure the time required to stabilize oscillation. The internal operations remain stopped during warm-up. The warm-up time is set by the warm-up counter, depending on the oscillator characteristics.
3. After the warm-up time has elapsed, the normal operation is restarted by the instruction that follows the STOP mode start instruction. At this time, the prescaler and the divider of the timing generator are cleared to "0".

*Note): When the STOP mode is released with a low hold voltage, the following cautions must be observed. The supply voltage must be at the operating voltage level before releasing the STOP mode. The RESETB pin input must also be "H" level, rising together with the supply voltage. In this case, if an external time constant circuit has been connected, the RESETB pin input voltage will increase at a slower pace than the power supply voltage. At this time, there is a danger that a reset may occur if the input voltage level of the RESETB pin drops below the non-inverting high-level input voltage (Hysteresis input).*

### 4.3.2.2 IDLE1/2 and SLEEP1 Modes

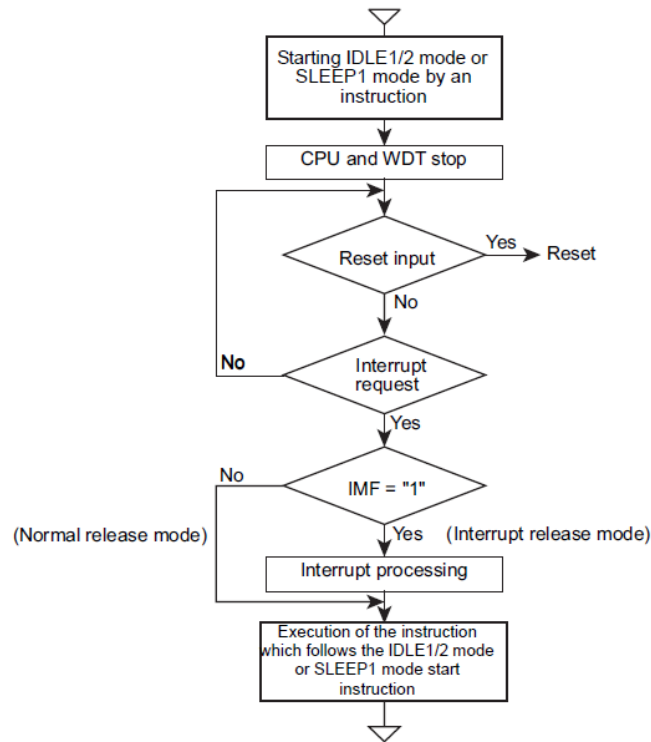


Figure 4.4 IDLE1/2 and SLEEP1 Modes

The IDLE1/2 and SLEEP1 modes are controlled by the system control register 2 (SYSCR2) and maskable interrupts. The following states are maintained during these modes.

1. The CPU and the watchdog timer stop their operations. The peripheral circuits continue to operate.
2. The data memory, the registers, the program status word and the port output latches are all held in the status in effect before IDLE1/2 or SLEEP1 mode was started.
3. The program counter holds the address of the instruction 2 ahead of the instruction which starts the IDLE1/2 or SLEEP1 mode.

#### (a) Start the IDLE1/2 and SLEEP1 Modes

After the interrupt master enable flag (IMF) is set to "0", set the individual interrupt enable flag (EF) to "1", which releases IDLE1/2 and SLEEP1 modes. To start the IDLE1/2 or SLEEP1 mode, set SYSCR2 <IDLE> to "1". If the release condition is satisfied when it is attempted to start the IDLE1/2 or SLEEP1 mode, SYSCR2 <IDLE> remains cleared and the IDLE1/2 or SLEEP1 mode will not be started.

*Note 1): When a watchdog timer interrupt is generated immediately before the IDLE1/2 or SLEEP1 mode is started, the watchdog timer interrupt will be processed but the IDLE1/2 or SLEEP1 mode will not be started.*

*Note 2): Before starting the IDLE1/2 or SLEEP1 mode, enable the interrupt request signals to be generated to release*

*the IDLE1/2 or SLEEP1 mode and set the individual interrupt enable flag.*

**(b) Release the IDLE1/2 and SLEEP1 Modes**

The IDLE1/2 and SLEEP1 modes include a normal release mode and an interrupt release mode. These modes are selected at the interrupt master enable flag (IMF). After releasing IDLE1/2 or SLEEP1 mode, SYSCR2 <IDLE> is automatically cleared to "0" and the operation mode is returned to the mode preceding the IDLE1/2 or SLEEP1 mode.

The IDLE1/2 and SLEEP1 modes are also released by a reset by the RESETB pin, a power-on reset and a reset by the voltage detection circuits. After releasing the reset, the warm-up starts. After the warm-up is completed, the NORMAL1 mode becomes active.

**1. Normal release mode (IMF = "0")**

The IDLE1/2 or SLEEP1 mode is released when the interrupt latch enabled by the individual interrupt enable flag (EF) is "1". The operation is restarted by the instruction that follows the IDLE1/2 or SLEEP1 mode start instruction. Normally, the interrupt latch (IL) of the interrupt source used for releasing must be cleared to "0" by load instructions.

**2. Interrupt release mode (IMF = "1")**

The IDLE1/2 or SLEEP1 mode is released when the interrupt latch enabled by the individual interrupt enable flag (EF) is "1". After the interrupt is processed, the operation is restarted by the instruction that follows the IDLE1/2 or SLEEP1 mode start instruction.

### 4.3.2.3 IDLE0 and SLEEP0 Modes

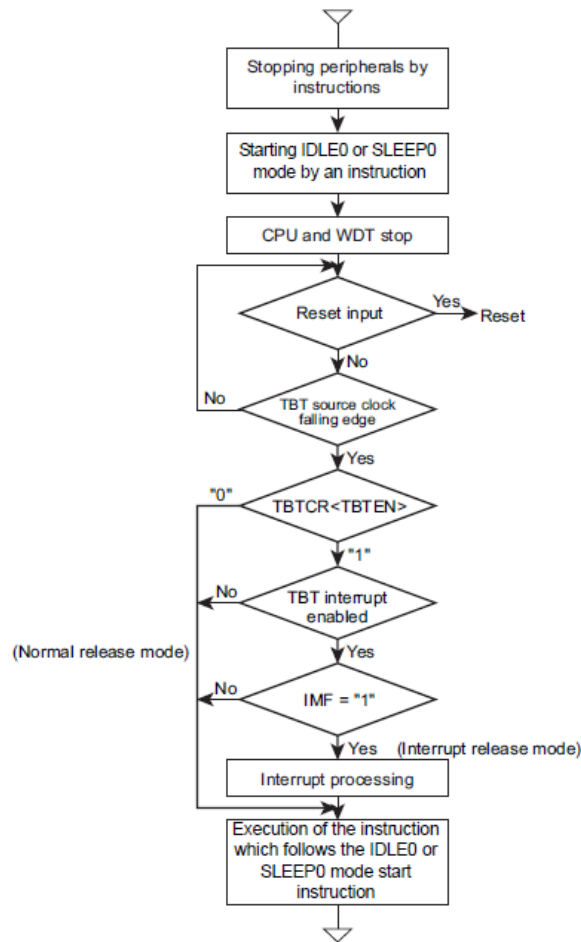


Figure 4.5 IDLE0 and SLEEP0 Modes

The IDLE0 and SLEEP0 modes are controlled by the system control register 2 (SYSCR2) and the time base timer control register (TBTTCR). The following states are maintained during the IDLE0 and SLEEP0 modes:

1. The timing generator stops the clock supply to the peripheral circuits except the time base timer.
2. The data memory, the registers, the program status word and the port output latches are all held in the states in effect before the IDLE0 or SLEEP0 mode was started.
3. The program counter holds the address of the instruction 2 ahead of the instruction which starts the IDLE0 or SLEEP0 mode.

#### (a) Start the IDLE0 and SLEEP0 Modes

Stop (disable) the peripherals such as a timer counter. To start the IDLE0 or SLEEP0 mode, set SYSCR2 <TGHALT> to "1".

#### (b) Release the IDLE0 and SLEEP0 Modes

The IDLE0 and SLEEP0 modes include a normal release mode and an interrupt release mode. These modes are selected at the interrupt master enable flag (IMF), the individual interrupt enable flag (EF5) for the time base timer and TBTCR <TBTEN>. After releasing the IDLE0 or SLEEP0 mode, SYSCR2 <TGHALT> is automatically cleared to "0" and the operation mode is returned to the mode preceding the IDLE0 or SLEEP0 mode. If TBTCR <TBTEN> has been set at "1", the INTTBT interrupt latch is set.

The IDLE0 and SLEEP0 modes are also released by a reset by the RESETB pin, a power-on reset and a reset by the voltage detection circuits. When a reset is released, the warm-up starts. After the warm-up is completed, the NORMAL1 mode becomes active.

##### 1. Normal Release Mode (IMF, EF5, TBTCR<TBTEN> = "0")

The IDLE0 or SLEEP0 mode is released when the falling edge of the source clock selected at TBTCR <TBTK> is detected. After the IDLE0 or SLEEP0 mode is released, the operation is restarted by the instruction that follows the IDLE0 or SLEEP0 mode start instruction.

When TBTCR <TBTEN> is "1", the time base timer interrupt latch is set.

##### 2. Interrupt Release Mode (IMF, EF5, TBTCR<TBTEN> = "1")

The IDLE0 or SLEEP0 mode is released when the falling edge of the source clock selected at TBTCR <TBTK> is detected. After the release, the INTTBT interrupt processing is started.

*Note 1): The IDLE0 or SLEEP0 mode is released to the NORMAL1 or SLOW1 mode by the asynchronous internal clock selected at TBTCR <TBTK>. Therefore, the period from the start to the release of the mode may be shorter than the time specified at TBTCR <TBTK>.*

*Note 2): When a watchdog timer interrupt is generated immediately before the IDLE0 or SLEEP0 mode is started, the watchdog timer interrupt will be processed but the IDLE0 or SLEEP0 mode will not be started.*


#### 4.3.2.4 SLOW Mode

The SLOW mode is controlled by system control register 2 (SYSCR2).

##### (a) Switching from the NORMAL2 Mode to the SLOW1 Mode

Set SYSCR2 <SYSCK> to "1".

When a maximum of  $2/f_{cgck} + 10/f_s$  [s] has elapsed since SYSCR2 <SYSCK> is set to "1", the main system clock ( $f_m$ ) is switched to  $f_s/4$ . After switching, wait for 2 machine cycles or longer, and then clear SYSCR2 <XEN> to "0" to turn off the high-frequency clock oscillator. If the oscillation of the low-frequency clock ( $f_s$ ) is unstable, confirm the stable oscillation at the warm-up counter before implementing the procedure described above.

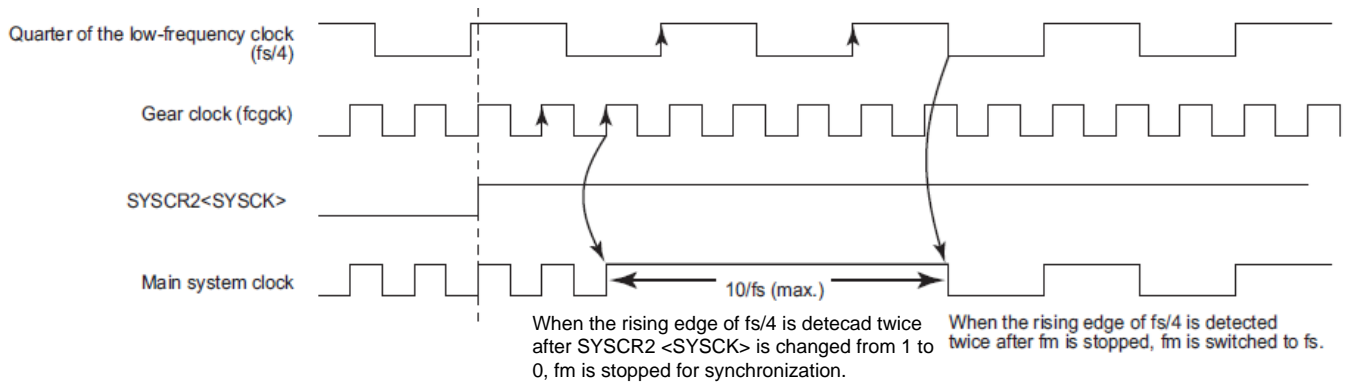


**Figure 4.6 Switching of the Main system clock ( $f_m$ )  
(Switching from  $f_{cgck}$  to  $f_s/4$ )**

**(b) Switching from the SLOW1 Mode to the NORMAL1 Mode**

Set SYSCR2 <XEN> to "1" to enable the high-frequency clock ( $f_c$ ) to oscillate. Confirm at the warm-up counter that the oscillation of the basic clock for the high-frequency clock has stabilized, and then clear SYSCR2 <SYSCK> to "0".

When a maximum of  $8/f_s + 2.5/f_{cgck}$  [s] has elapsed since SYSCR2 <SYSCK> is cleared to "0", the main system clock ( $f_m$ ) is switched to  $f_{cgck}$ . After switching, wait for 2 machine cycles or longer, and then clear SYSCR2 <XTEN> to "0" to turn off the low-frequency clock oscillator.

The SLOW mode is also released by a reset by the RESETB pin, a power-on reset and a reset by the voltage detection circuits. When a reset is released, the warm-up starts. After the warm-up is completed, the NORMAL1 mode becomes active.

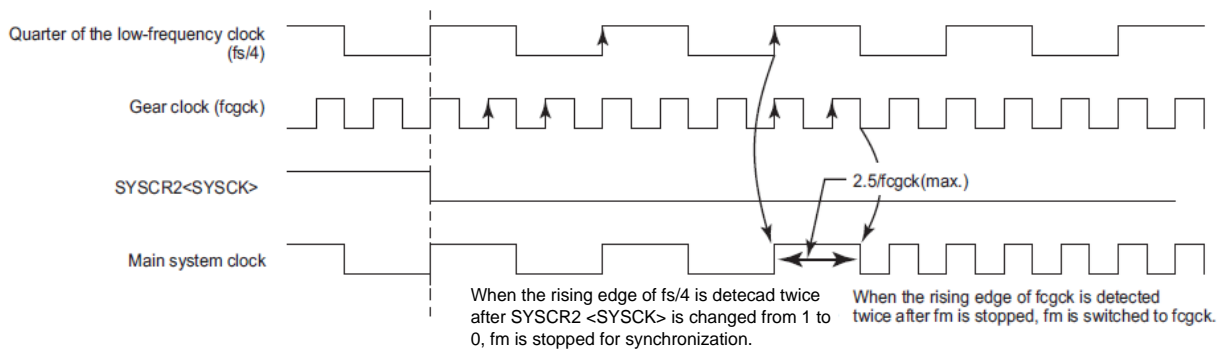

**Figure 4.7 Switching of the Main system clock ( $f_m$ )  
(Switching from  $f_s/4$  to  $f_{cgck}$ )**

*Note 1): Be sure to follow this procedure to switch the operation from the SLOW1 mode to the NORMAL1 mode.*

*Note 2): After switching SYSCR2 <SYSCK>, be sure to wait for 2 machine cycles or longer before clearing SYSCR2 <XTEN> to "0". Clearing it within 2 machine cycles causes a system clock reset.*

*Note 3): When the main system clock ( $f_m$ ) is switched, the gear clock ( $f_{cgck}$ ) is synchronized with the clock that is a quarter of the basic clock ( $f_s$ ) for the low-frequency clock. For the synchronization,  $f_m$  is stopped for a period of*

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

2.5/fcgck [s] or shorter.

Note 4): When P0FC0 is "0", setting SYSCR2 <XEN> to "1" causes a system clock reset.

Note 5): When SYSCR2 <XEN> is set at "1", writing "1" to SYSCR2 <XEN> does not cause the warm-up counter to start counting the source clock.

## 4.4 Stack Area and Stack Pointer

### 4.4.1 Stack Area

A stack is an area in memory for temporarily saving the PC, PSW and other values during subroutines and interrupts.

When a subroutine is called by the [CALL mn] or [CALLV n] instruction, the CPU pushes (saves) the high-order and low-order bytes of the return address on the stack before jumping to the subroutine entry address. When the software interrupt instruction, SWI, is executed and when a hardware interrupt is accepted, the CPU saves the PSW and then return address on the stack.

When the return-from-subroutine instruction, RET, is executed, the CPU pops (restores) the return address into the PC. When the return-from-interrupt instruction, RETI or RETN, is executed, the CPU restores the PC and PSW from the stack.

A stack can be allocated anywhere in the data area.

### 4.4.2 Stack Pointer

The Stack Pointer (SP) is a 16-bit register that holds the address of the next available location on the stack. The SP is post-decremented on subroutine calls, PUSH operations and interrupts, and pre-incremented on returns from subroutines and interrupts and POP operations. The stack grows downwards from high addresses to low addresses as it is filled.





Figure 4.8 Stack Pointer


Figure 4.9 shows the contents of the stack and the SP register as each of the following instructions is executed.

The SP register defaults to 0x00FF upon hardware reset.

Like an index register, the SP register can be modified by using load / store and ALU instructions. The SP register can also be used as an index register in Indexed Addressing.

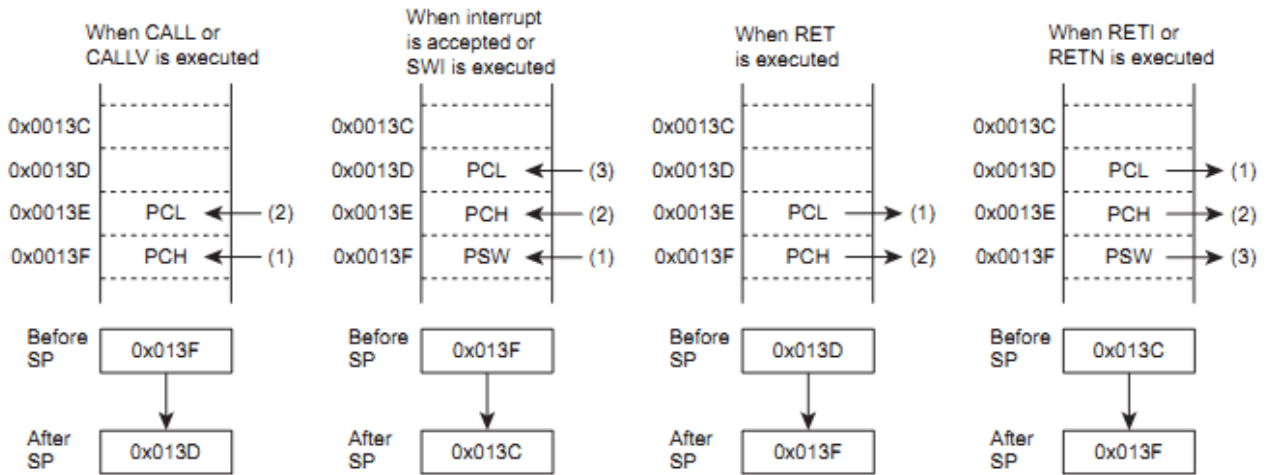

(a) PC and PSW in the stack (Pushing and popping)



(b) Direction in which the stack grows

Figure 4.9 Stack

## 4.5 Program Counter (PC)

### 4.5.1 Program Counter - PC

The Program Counter (PC) is an 8-bit register that holds the address of next instruction to be executed in the code area. When the reset signal is released, the CPU loads the reset vector stored in the vector table (at 0xFFFF and 0xFFFE in MCU mode) into the PC; thus the program can start at an arbitrary address. The iMQ i87 Series is pipelined; that is, CPU instructions are pre-fetched. Therefore, the PC points to an address two bytes after the address of the instruction being executed. For example, the PC contains 0xC125 while the single-byte instruction stored at 0xC123 is being executed.

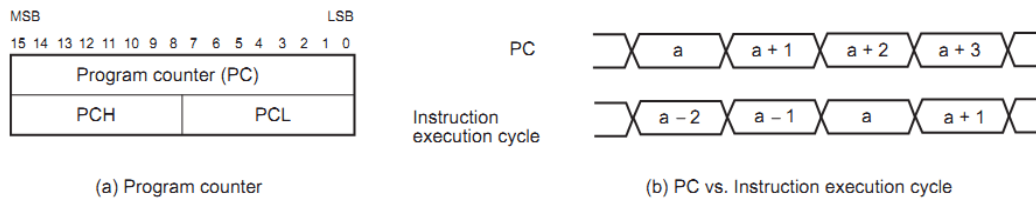


Figure 4.10 Program Counter

### 4.5.2 Effects of Jump Instructions on the PC Value

There are relative and absolute jump instructions. The jump destination is limited within the code area; a jump cannot occur to the data area. The following describes the effects of jump instructions on the PC value.

**(1) Relative Jump Instruction with a 5-bit Displacement (JRS cc, \$ + 2 + d)**

When the memory location at 0xE8C4 contains the instruction "JRS T, \$ + 2 + 0x08", if JF = 1, the PC is incremented by 0x08; i.e., a jump occurs to the address 0xE8CE. (The PC points to an address two bytes after the address of the instruction being executed. In this example, the PC contains 0xE8C4 + 2 = 0xE8C6 before the jump.)

**(2) Relative Jump Instructions with an 8-bit Displacement (JR cc, \$ + 2 + d / JR cc, \$ + 3 + d)**

When the memory location at 0xE8C4 contains the instruction "JR Z, \$ + 2 + 0x80", if ZF = 1, a jump occurs to an address that is calculated by PC + 0xFF80 (-128). Thus the jump destination is 0xE846.

**(3) 16-bit Absolute Jump Instruction (JP a)**

When the memory location at 0xE8C4 contains the instruction "JP 0xC235", a jump occurs unconditionally to the address 0xC235. The absolute jump instruction can jump to a location within the full range of the code area (therefore, 8K Bytes for MQ6905).

## 4.6 General-Purpose Register

MQ6905 has eight 8-bit general-purpose registers called W, A, B, C, D, E, H and L. These registers can be used as 16-bit register pairs called WA, BC, DE and HL.

The general-purpose registers are not mapped to the address space. The contents of the general-purpose registers are undefined after power-up and reset.

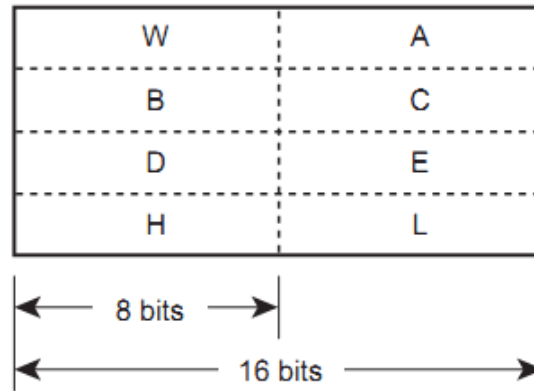


Figure 4.11 General-Purpose Registers

The W, A, B, C, D, E, H and L registers are individually used by the 8-bit load/store and ALU instructions.

The WA, BC, DE and HL register pairs are used by the 16-bit load/store and ALU instructions. These registers also provide the functionalities discussed in the following subsections in addition to the common characteristics as general-purpose registers.

#### 4.6.1 A Registers

Bit manipulation instructions can use the A register to specify a bit position in a register whose value should be tested or changed.

The A register is also used as an offset register in PC-Relative Register Indirect Addressing ( $PC + A$ ).

#### 4.6.2 C Registers

For divide instructions, the C register holds the divisor. The remainder is written back into the upper byte of the register pair specified as the dividend; the quotient is written back into the lower byte.

The C register is also used as an offset register in Register Indexed Addressing ( $HL + C$ ).

#### 4.6.3 DE Registers

In Register Indirect Addressing, the DE register holds the address of the memory location where the operand resides.

#### 4.6.4 HL Registers

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

In Register Indirect Addressing, the HL register holds the address of the memory location where the operand resides. In Indexed Addressing, the HL register is used as an index register.

#### 4.6.5 16-Bit General-Purpose Registers (IX, IY)

MQ6905 has two 16-bit general-purpose registers called IX and IY. In Register Indirect Addressing, these registers hold the address of the memory location where the operand resides. In Indexed Addressing, they are used as index registers.

The contents of the IX and IY registers are undefined after power-up and reset.




Figure 4.12 16-Bit General-Purpose Registers

The load/store and ALU instructions can also use the IX and IY registers as 16-bit general-purpose registers.

### 4.7 Program Status Word (PSW)

The Program Status Word, which resides at address 0x003F in the SFR, consists of the following seven flags:

- Jump Status Flag (JF)
- Zero Flag (ZF)
- Carry Flag (CF)
- Half Carry Flag (HF)
- Sign Flag (SF)
- Overflow Flag (VF)

Dedicated instructions are available to access the PSW. General load instructions can also be used to read the PSW.

#### Organization of the PSW

PSW (0x003F)	7	6	5	4	3	2	1	0
	JF	ZF	CF	HF	SF	VF	-	-

The PSW consists of seven bits of status information that are set or cleared by CPU operations. The flags can be specified as a condition code (cc) in conditional jump instructions, "JR cc, a" and "JRS cc, a", except HF.

cc	Meaning	Condition
T	True	JF = 1
F	False	JF = 0
Z	Zero	ZF = 1
NZ	Not zero	ZF = 0
CS	Carry set	CF = 1
CC	Carry clear	CF = 0
VS	Overflow set	VF = 1
VC	Overflow clear	VF = 0
M	Minus	SF = 1
P	Plus	SF = 0
EQ	Equal	ZF = 1
NE	Not equal	ZF = 0
LT	Unsigned less than	CF = 1
GE	Unsigned greater than or equal to	CF = 0
LE	Unsigned less than or equal to	(CF ∨ ZF) = 1
GT	Unsigned greater than	(CF ∨ ZF) = 0
SLT	Signed less than	(SF ∨ VF) = 1
SGE	Signed greater than or equal to	(SF ∨ VF) = 0
SLE	Signed less than or equal to	ZF ∨ (SF ∨ VF) = 1
SGT	Signed greater than	ZF ∨ (SF ∨ VF) = 0

**Table 4.3 Condition Code (cc) Table**

The instruction "LD PSW" clears all the other bits in the PSW.

An attempt to write to the address 0x3F using a load instruction is ignored. Instead, the PSW bits are set or cleared, as predefined for a given instruction.

Upon an interrupt, the PSW is pushed (saved) onto the stack, together with the Program Counter. The content of the stack is popped (restored) to the PSW by the return-from-interrupt instructions, RETI and RETN.

The values of the PSW bits become undefined upon power-up and reset.

#### 4.7.1 Zero Flag (ZF)

The ZF bit is set to 1 when the result of the last ALU instruction or the operand of the last load/store instruction is 0x00 (for 8-bit ALU or load/store operations) or 0x0000 (for 16-bit ALU operations). The ZF bit is also set to 1 when the value of the bit specified by the last bit manipulation instruction is zero; otherwise, the ZF bit is cleared to 0. Also, the ZF bit is set when the high-order eight bits of the product of the last multiply instruction or the remainder of the last divide instruction is 0x00; otherwise, the ZF bit is cleared to 0.

#### 4.7.2 Carry Flag (CF)

The CF bit contains a carry from an addition or a borrow as a result of subtraction. The CF bit is also set to 1 when the divisor of the last divide instruction is 0x00 (divided-by-zero error) or the quotient is equal to or greater than 0x100 (quotient overflow error). Shift and rotate instructions operate with and through the CF bit. For bit manipulation instructions, the CF bit serves as a single-bit Boolean accumulator. The CF bit can be set, cleared and complemented via instructions.

#### 4.7.3 Half Carry Flag (HF)

The HF bit contains a carry to bit 4 or a borrow from bit 4 as a result of an 8-bit addition or subtraction. The HF bit is used for binary-coded decimal (BCD) addition / subtraction and correction, DAA r and DASr.

#### 4.7.4 Sign Flag (SF)

The SF bit is set to 1 when the most significant bit (MSB) of the result of the last arithmetic operation is one. Otherwise, the SF bit is cleared to 0.

#### 4.7.5 Overflow Flag (VF)

The VF bit is set to 1 when there is an overflow as a result of an arithmetic operation. Otherwise, the VF bit is cleared to 0. For example, the VF bit is set when adding two positive numbers gives a negative result or when adding two negative numbers gives a positive result.

#### 4.7.6 Jump Status Flag (JF)

The JF bit is usually set to 1, and is cleared to 0 or hold a carry according to a specific instruction. The JF bit is used as a condition for conditional jump instructions, "JR T/F, a" and "JRS T/F, a" (where T and F represent true and false condition codes).

**Example: The assumptions are:**

WA register = 0x219A

HL register = 0x00C5

Data Memory location at 0x000C5 = 0xD7

CF = 1, HF = 0, SF = 1, VF = 0

The following table shows how the A and WA registers and the PSW bits are affected by various instructions.

Instruction	Result in A or WA	PSW					
		JF	ZF	CF	HF	SF	VF
ADDC A, (HL)	72	1	0	1	1	0	1
SUBB A, (HL)	C2	1	0	1	0	1	0
CMP A, (HL)	9A	0	0	1	0	1	0
AND A, (HL)	92	0	0	1	0	1	0
LD A, (HL)	D7	1	0	1	0	1	0
ADD A, 0x66	00	1	1	1	1	0	0
INC A	9B	0	0	1	0	1	0
ROL A	35	1	0	1	0	1	0
ROR A	CD	0	0	0	0	1	0
ADD WA, 0xF508	16A2	1	0	1	0	0	0
MUL WA	13DA	0	0	1	0	1	0
SET A.5	BA	1	1	1	0	1	0

Table 4.4 Examples of How A and WA Registers, and the PSW Bits Affected by Various Instructions

## 4.8 Low Power Consumption Function for Peripherals

MQ6905 has low power consumption registers (POFFCRn) that save power when specific peripheral functions are unused. Each bit of the low power consumption registers can be set to enable or disable each peripheral function. (n = 0, 1, 2, 3)

The basic clock supply to each peripheral function is disabled for power saving, by setting the corresponding bit of the low power consumption registers (POFFCRn) to "0". (The disabled peripheral functions become unavailable.) The basic clock supply to each peripheral function is enabled and the function becomes available by setting the corresponding bit of the low power consumption registers (POFFCRn) to "1".

After reset, the low power consumption registers (POFFCRn) are initialized to "0", and thus the peripheral functions are unavailable. When each peripheral function is used for the first time, be sure to set the corresponding bit of the low power consumption registers (POFFCRn) to "1" in the initial settings of the program (before operating the control register for the peripheral function).

When a peripheral function is operating, the corresponding bit of the low power consumption registers (POFFCRn) must not be changed to "0". If it is changed, the peripheral function may operate unexpectedly.

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

**Low Power Consumption Register 0**

POFFCR0 (0x0F74)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	TC023EN	TC001EN	-	TCC0EN	TCA1EN	TCA0EN
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

TC023EN	TC02, 03 enable control	0: Disable 1: Enable
TC001EN	TC00, 01 enable control	0: Disable 1: Enable
TCC0EN	TCC0 enable control	0: Disable 1: Enable
TCA1EN	TCA1 enable control	0: Disable 1: Enable
TCA0EN	TCA0 enable control	0: Disable 1: Enable

**Low Power Consumption Register 1**

POFFCR1 (0x0F75)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	SBI0EN	-	UART2EN	UART1EN	UART0EN
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

SBI0EN	I2C0 control	0: Disable 1: Enable
UART2EN	UART2 control	0: Disable 1: Enable
UART1EN	UART1 control	0: Disable 1: Enable
UART0EN	UART0 control	0: Disable 1: Enable

**Low Power Consumption Register 2**

POFFCR2 (0x0F76)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	RTCEN	-	-	-	-	SIO0EN
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

RTCEN	RTC enable control	0: Disable 1: Enable
SIO0EN	SIO0 control	0: Disable 1: Enable

**Low Power Consumption Register 3**

POFFCR3 (0x0F77)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	INT5EN	INT4EN	INT3EN	INT2EN	INT1EN	INT0EN
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

INT5EN	INT5 Control	0: Disable 1: Enable
INT4EN	INT4 Control	0: Disable 1: Enable
INT3EN	INT3 Control	0: Disable 1: Enable
INT2EN	INT2 Control	0: Disable 1: Enable
INT1EN	INT1 Control	0: Disable 1: Enable
INT0EN	INT0 Control	0: Disable 1: Enable

### 4.9 Key-on Wakeup (KWU)

The key-on wakeup is a function for releasing the STOP mode at pins KWI7 through KWI2.

#### 4.9.1 Configuration

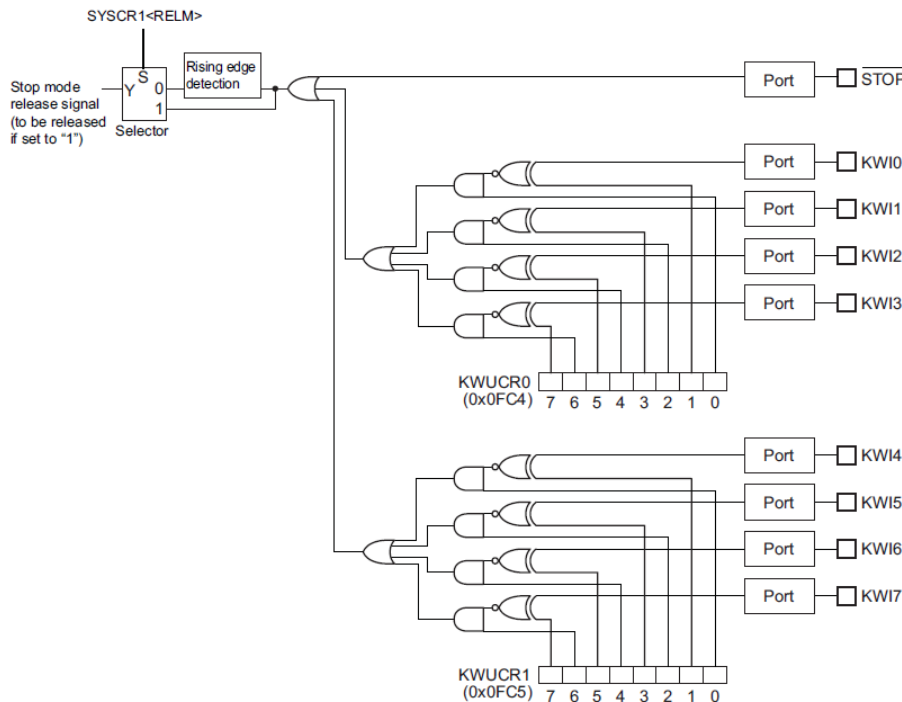


Figure 4.13 Key-on Wakeup Circuit

## 4.9.2 Control

Key-on wakeup control registers (KWUCR0 and KWUCR1) can be configured to designate the key-on wakeup pins (KW17 through KW12) as STOP mode release pins and to specify the STOP mode release levels of each of these designated pins.

### Key-on Wakeup Control Register 0

KWUCR0 (0x0FC4)	7	6	5	4	3	2	1	0
Bit Symbol	KW3LE	KW3EN	KW2LE	KW2EN	KW1LE	KW1EN	KW0LE	KW0EN
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

KW3LE	STOP mode release level of KW13 pin	0: Low level 1: High level
KW3EN	Input enable / disable control of KW13 pin	0: Disable 1: Enable
KW2LE	STOP mode release level of KW12 pin	0: Low level 1: High level
KW2EN	Input enable / disable control of KW12 pin	0: Disable 1: Enable
KW1LE	STOP mode release level of KW11 pin	0: Low level 1: High level
KW1EN	Input enable / disable control of KW11 pin	0: Disable 1: Enable
KW0LE	STOP mode release level of KW10 pin	0: Low level 1: High level
KW0EN	Input enable / disable control of KW10 pin	0: Disable 1: Enable

### Key-on Wakeup Control Register 1

KWUCR1 (0x0FC5)	7	6	5	4	3	2	1	0
Bit Symbol	KW7LE	KW7EN	KW6LE	KW6EN	KW5LE	KW5EN	KW4LE	KW4EN
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

KW7LE	STOP mode release level of KW17 pin	0: Low level 1: High level
KW7EN	Input enable / disable control of KW17 pin	0: Disable 1: Enable
KW6LE	STOP mode release level of KW16 pin	0: Low level 1: High level
KW6EN	Input enable / disable control of KW16 pin	0: Disable 1: Enable
KW5LE	STOP mode release level of KW15 pin	0: Low level 1: High level
KW5EN	Input enable / disable control of KW15 pin	0: Disable 1: Enable

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

KW4LE	STOP mode release level of KW14 pin	0: Low level 1: High level
KW4EN	Input enable / disable control of KW14 pin	0: Disable 1: Enable

### 4.9.3 Function

By using the key-on wakeup function, the STOP mode can be released at KWIm pin (m: 0 through 7). To designate the KWIm pin as a STOP mode release pin, it is necessary to configure the key-on wakeup control register (KWUCRn) (n: 0 or 1).

#### 4.9.3.1 Setting KWUCRn and P4PU Registers

To designate a key-on wakeup pin (KWIm) as a STOP mode release pin, set KWUCRn <KWmEN> to "1". After KWIm pin is set to "1" at KWUCRn <KWmEN>, a specific STOP mode release level can be specified for this pin at KWUCRn <KWmLE>. If KWUCRn <KWmLE> is set to "0", STOP mode is released when an input is at a low level. If it is set to "1", STOP mode is released when an input is at a high level. For example, if you want to release STOP mode by inputting a high-level signal into a KW10 pin, set KWUCR0 <KW0EN> to "1", and KWUCR0 <KW0LE> to "1".

#### 4.9.3.2 Starting STOP Mode

To start the STOP mode, set SYSCR1 <RELM> to "1" (level release mode), and SYSCR1 <STOP> to "1".

To use the key-on wakeup function, do not set SYSCR1 <RELM> to "0" (edge release mode). If the key-on wakeup function is used in edge release mode, STOP mode cannot be released. This is because the KWIm pin enabling inputs to be received is at a release level after the STOP mode starts.

#### 4.9.3.3 Releasing STOP Mode

To release STOP mode, input a specific release level into the KWIm pin for which receipt of inputs is enabled.

If the KWIm pin is already at a release level when the STOP mode starts, the following instruction will be executed without starting the STOP mode (with no warm-up performed).

*Note): Do not applied an analog voltage to KWIm pin for which receipt of inputs is enabled by the key-on wakeup control register (KWUCRn) setting, or a penetration current will flow.*

## 5. Reset Function

### 5.1 Reset Control Circuit

The reset circuit controls the external and internal factor resets and initializes the system.

#### 5.1.1 Configuration

The reset circuit controls the external and internal factor resets and initializes the system.

1. External reset input (external factor)
2. Power-on reset (internal factor)
3. Voltage detection reset (internal factor)
4. Watchdog timer reset (internal factor)
6. System clock reset (internal factor)

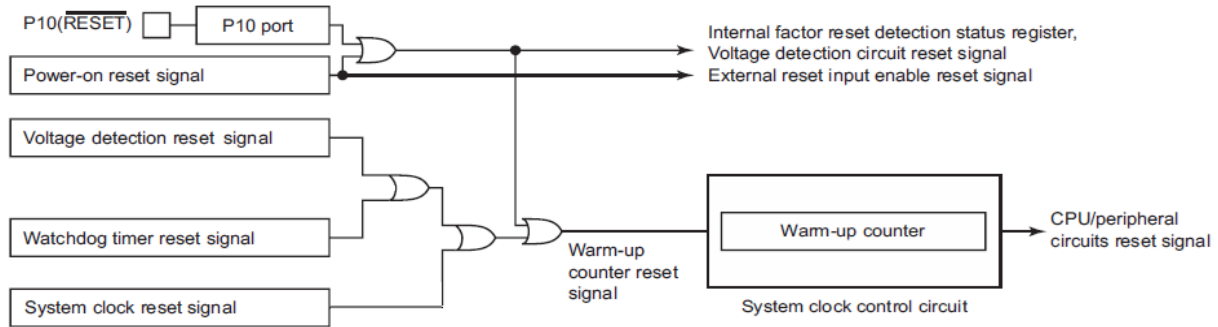


Figure 5.1 Reset Control Circuit

#### 5.1.2 Control

The reset control circuit is controlled by system control register 3 (SYSCR3), system control register 4 (SYSCR4), system control status register (SYSSR4) and the internal factor reset detection status register (IRSTSR).

##### System Control Register 3

SYSCR3 (0x0FDE)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	-	-	RVCTR	RAREA	(RSTDIS)
Read/Write	R	R	R	R	R	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

RAREA	Specifies mapping of the RAM in the code area	0: The RAM is not mapped from 0x0040 to 0x083F in the code area. 1: The RAM is mapped from 0x0040 to 0x083F in the code area.
-------	---	--

RVCTR	Specifies mapping of the vector table for vector call instructions and interrupts	Vector table for vector call instructions 0:0xFFA0 to 0xFFBF in the code area 1: 0x01A0 to 0x01BF in the code area  Vector table for interrupt 0: 0xFFC2 to 0xFFFF in the code area 1: 0x01C2 to 0x01FD in the code area
RSTDIS	External reset input enable register	0: Enable the external reset input 1: Disable the external reset input

*Note 1): The enabled SYSCR3 <RSTDIS> is initialized by a power-on reset only, and cannot be initialized by an external reset input or internal factor reset. The value written in SYSCR3 is reset by a power-on reset, external reset input or internal factor reset.*

*Note 2): The value of SYSCR3 <RSTDIS> is invalid until 0xB2 is written into SYSCR4.*

*Note 3): After SYSCR3 <RSTDIS> is modified, SYSCR4 should be written 0xB2 (Enable code for SYSCR3 <RSTDIS>) in NORMAL mode when fcgck is fc/4 (CGCR <FCGCKSEL> = 00). Otherwise, SYSCR 3<RSTDIS> may be enabled at unexpected timing.*

*Note 4): Bits 7 to 3 of SYSCR3 are read as "0".*

#### System Control Register 4

<b>SYSCR4 (0x0FDF)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	SYSCR4							
Read/Write	Write only							
After reset	0	0	0	0	0	0	0	0

SYSCR4	Write the SYSCR3 data control code	0xB2:	Enable the contents of SYSCR3 <RSTDIS>
		0xD4:	Enable the contents of SYSCR3 <RAREA> and SYSCR3 <RVCTR>
		0x71:	Enable the contents of IRSTSR <FCLR>
		Others:	Invalid

*Note 1): SYSCR4 is a write-only register, and must not be accessed by using a read-modify-write instruction, such as a bit operation.*

*Note 2): After SYSCR3 <RSTDIS> is modified, SYSCR4 should be written 0xB2 (Enable code for SYSCR3 <RSTDIS>) in NORMAL mode when fcgck is fc/4 (CGCR <FCGCKSEL>=00). Otherwise, SYSCR3 <RSTDIS> may be enabled at unexpected timing.*

*Note 3): After IRSTSR <FCLR> is modified, SYSCR4 should be written 0x71 (Enable code for IRSTSR <FCLR> in NORMAL mode when fcgck is fc/4 (CGCR <FCGCKSEL>=00). Otherwise, IRSTSR <FCLR> may be enabled at unexpected timing.*

#### System Control Status Register 4

<b>SYSSR4 (0x0FDF)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	-	-	-	-	-	RVCTRS	RAREAS	(RSTDISS)
Read/Write	R	R	R	R	R	R	R	R
After reset	0	0	0	0	0	0	0	0

RAREAS	Status of mapping of the RAM in the code area	0: The enabled SYSCR3<RAREA> data is "0". 1: The enabled SYSCR3<RAREA> data is "1".
--------	---	--

RVCTRS	Status of mapping of the vector address in the area	0: The enabled SYSCR3<RVCTR> data is "0". 1: The enabled SYSCR3<RVCTR> data is "1".
--------	---	--

Note 1): The enabled SYSCR3 <RSTDIS> is initialized by a power-on reset only, and cannot be initialized by any other reset signals.

The value written in SYSCR3 is reset by a power-on reset and other reset signals.

Note 2): Bits 7 to 3 of SYSCR4 are read as "0".

### Internal Factor Reset Detection Status Register

IRSTSR (0x0FCC)	7	6	5	4	3	2	1	0
Bit Symbol	FCLR	FLSRF	TRMDS	TRMRF	LVD2RF	LVD1RF	SYSRF	WDTRF
Read/Write	W	R	R	R	R	R	R	R
After reset	0	0	0	0	0	0	0	0

FCLR	Flag initialization control	0: - 1: Clear the internal factor reset flag to "0".
FLSRF	Flash standby reset detection flag	0:- 1: Detect the flash standby reset.
TRMDS	Trimming data status	0: - 1: Detect state of abnormal trimming data
TRMRF	Trimming data reset detection flag	0: - 1: Detects the trimming data reset.
LVD2RF	Voltage detection reset 2 detection flag	0: - 1: Detect the voltage detection 2 reset.
LVD1RF	Voltage detection reset 1 detection flag	0: - 1: Detect the voltage detection 1 reset.
SYSRF	System clock reset detection flag	0: - 1: Detect the system clock reset.
WDTRF	Watchdog timer reset detection flag	0:- 1: Detect the watchdog timer reset.

Note 1): IRSTSR is initialized by an external reset input or power-on reset.

Note 2): Care must be taken in system designing since the IRSTSR may not fulfill its functions due to disturbing noise and other effects.

Note 3): IRSTSR <FCLR> is initialized by a power-on reset, an external reset input or an internal reset factor.

Note 4): Set IRSTSR <FCLR> to "1" and write 0x71 to SYSCR4. This enables IRSTSR <FCLR> and the internal factor reset detection status register is clear to "0". IRSTSR <FCLR> is cleared to "0" automatically after initializing the internal factor reset detection status register.

Note 5): After IRSTSR <FCLR> is modified, SYSCR4 should be written 0x71 (Enable code for IRSTSR <FCLR> in NORMAL mode when fcgck is fc/4 (CGCR <FCGCKSEL> = 00). Otherwise, IRSTSR <FCLR> may be enabled at unexpected timing.

Note 6): Bit 7 of IRSTSR is read as 0.

## 5.1.3 Function

The power-on reset, external reset input and internal factor reset signals are input to the warm-up circuit of the clock generator.

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

During reset, the warm-up counter circuit is reset, and the CPU and the peripheral circuits are reset.

After reset is released, the warm-up counter starts counting the high frequency clock (fc), and executes the warm-up operation that follows reset release.

During the warm-up operation that follows reset release, the trimming data is loaded from the embedded flash memory for adjustment of the ladder resistor that generates the comparison voltage for the power-on reset and the voltage detection circuits.

When the warm-up operation that follows reset release is finished, the CPU starts execution of the program from the reset vector address stored in addresses 0xFFFFE to 0xFFFF.

When a reset signal is input during the warm-up operation that follows reset release, the warm-up counter circuit is reset.

Built-in Hardware	During Reset	During the warm-up operation that follows reset release	Immediately after the warm-up operation that follows reset release
Program counter (PC)	0xFFFFE	0xFFFFE	0xFFFFE
Stack pointer (SP)	0x00FF	0x00FF	0x00FF
RAM	Indeterminate	Indeterminate	Indeterminate
General-purpose registers (W, A, B, C, D, E, H, L, IX and IY)	Indeterminate	Indeterminate	Indeterminate
Jump status flag (JF)	Indeterminate	Indeterminate	Indeterminate
Zero flag (ZF)	Indeterminate	Indeterminate	Indeterminate
Carry flag (CF)	Indeterminate	Indeterminate	Indeterminate
Half carry flag (HF)	Indeterminate	Indeterminate	Indeterminate
Sign flag (SF)	Indeterminate	Indeterminate	Indeterminate
Overflow flag (VF)	Indeterminate	Indeterminate	Indeterminate
Interrupt master enable flag (IMF)	0	0	0
Individual interrupt enable flag (EF)	0	0	0
Interrupt latch (IL)	0	0	0
Hi-freq. clock oscillation circuit	Oscillation enabled	Oscillation enabled	Oscillation enabled
Low-freq. clock oscillation circuit	Oscillation disabled	Oscillation disabled	Oscillation disabled
Warm-up counter	Reset	Start	Stop
Timing generator prescaler and divider	0	0	0
Watchdog timer	Disabled	Disabled	Enabled
Voltage detection circuit	Disabled or enabled	Disabled or enabled	Disabled or enabled
I/O port pin status	HiZ	HiZ	HiZ
Special function register	Refer to the SFR map.	Refer to the SFR map.	Refer to the SFR map.

### Table 5.1 Initialization of Built-in Hardware by Reset Operation and Its Status after Release

*Note 1): The voltage detection circuits are disabled by an external reset input or power-on reset only.*

*Note 2): "HiZ" indicates high-impedance.*

The reset operation is common to the power-on reset, external reset input and internal factor resets, except for the initialization of some special function registers and the initialization of the voltage detection circuits.

When a reset is applied, the peripheral circuits become the states as shown in Table 5.1.

## 5.1.4 Reset Signal Generating Factors

Reset signals are generated by each factor as follows:

### 5.1.4.1 External Reset Input (RESETB Pin Input)

Port P10 is also used as the RESETB pin, and it serves as the RESETB pin after the power is turned on.

#### - When the supply voltage rises rapidly :

When the power supply rise time (tVDD) is shorter than 5 ms with enough margin, the reset can be released by a power-on reset or an external reset (RESETB pin input).

The power-on reset logic and external reset (RESETB pin input) logic are ORed. This means that the TMP89FM45QUG is reset when either or both of these reset sources are asserted. Therefore, the reset time is determined by the reset source with a longer reset period.

If the RESETB pin level changes from Low to High before the supply voltage rises above the power-on-reset release voltage (VPROFF) (or if the RESETB pin level is "H" from the beginning), the reset time depends on the power-on reset. If the RESETB pin level changes from Low to High after the supply voltage rises above VPROFF, the reset time depends on the external reset.


In the former case, a warm-up period begins when the power-on reset signal is released. In the latter case, a warm-up period begins when the RESETB pin level becomes "H". Upon completion of the warm-up period, the CPU and peripheral circuits start operating (Figure 5.2 ).

#### - When the supply voltage rises slowly :

When the power supply rise time (tVDD) is longer than 5 ms, the reset must be released by using the RESETB pin.


In this case, hold the RESETB pin "L" until the supply voltage rises to the operating voltage range and oscillation is stabilized. When this state is achieved, wait at least 5  $\mu$ s and then pull the RESETB pin "H". Changing the RESETB pin level to "H" starts a warm-up period. Upon completion of the

warm-up period, the CPU and peripheral circuits start operating (Figure 5.2 ).

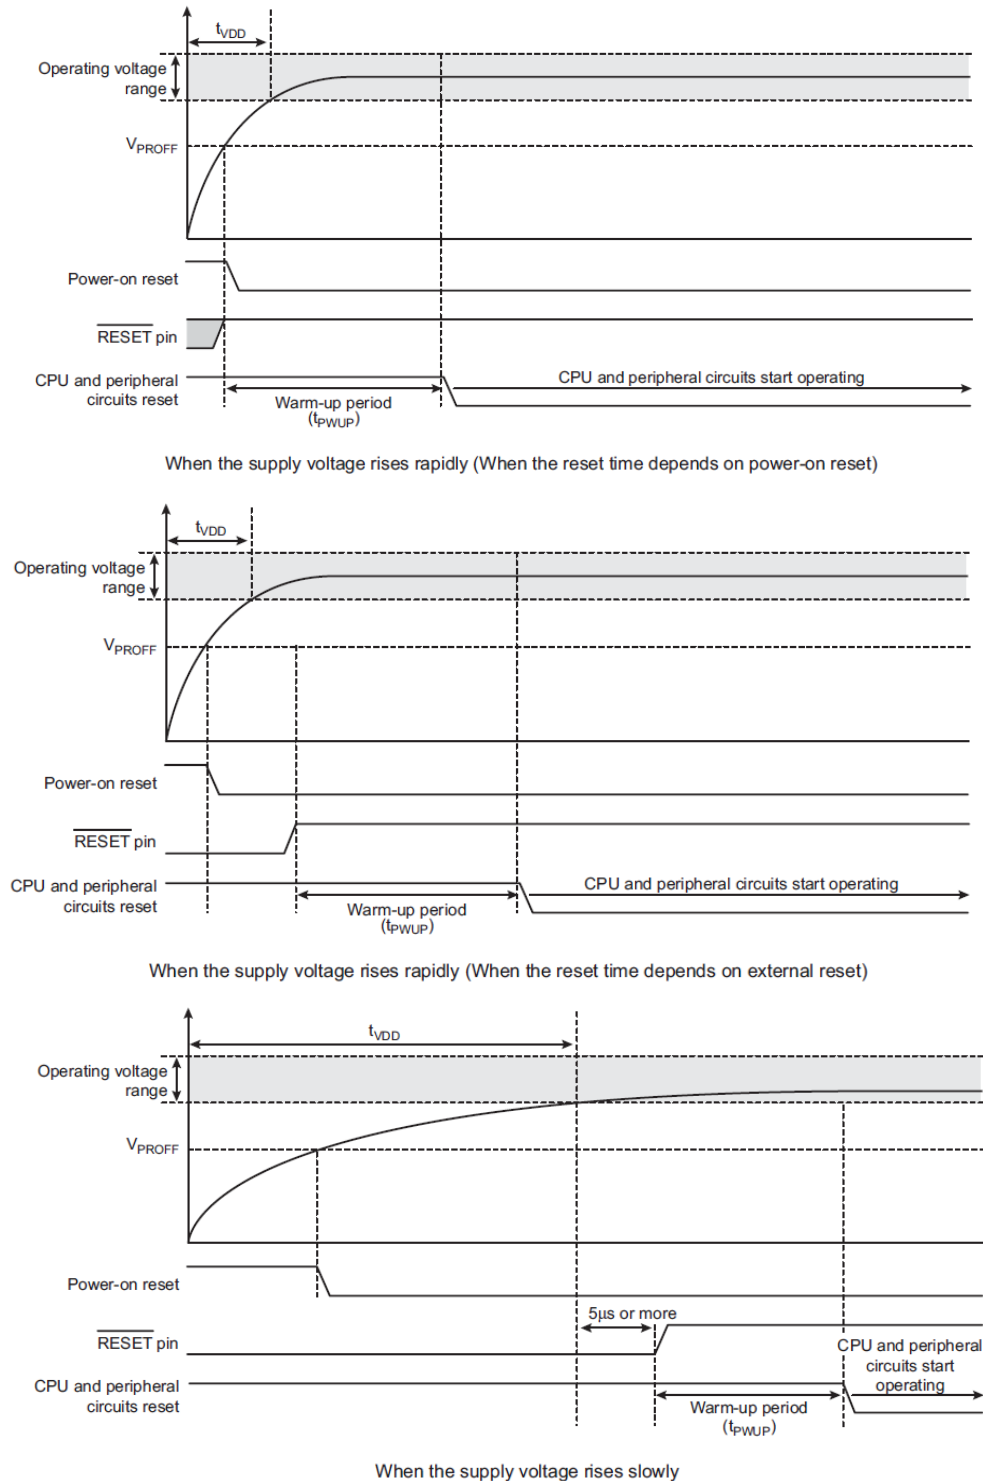

**Figure 5.2 External Reset Input (During Power-Up)**

If the supply voltage is within the recommended operating voltage range, the RESETB pin is kept at the "L" level for 5  $\mu$ s with the stabilized oscillation, and then a reset is applied.

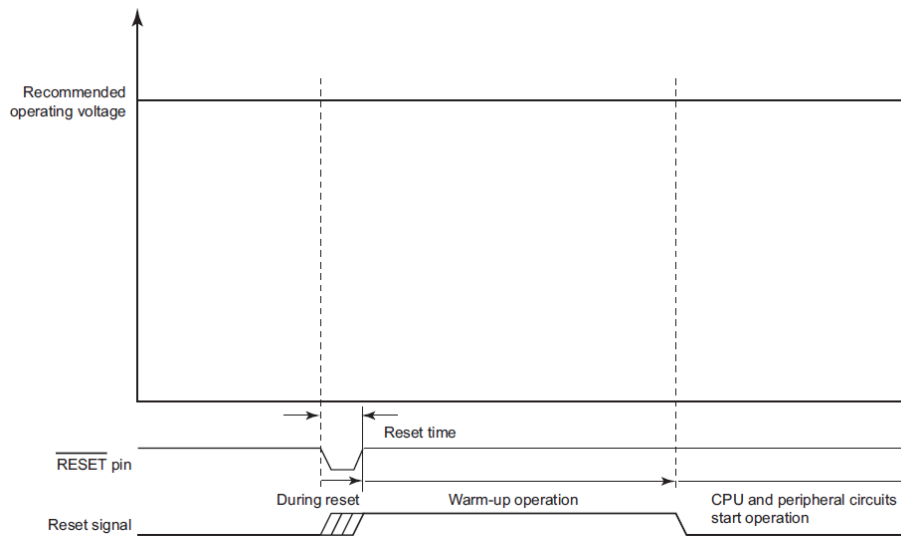

**Figure 5.3 External Reset Input (when the power is stabilized)**

In each case, after a reset is applied, it is released by turning the RESETB pin to "H" and the warm-up operation that follows reset release gets started.

*Note): When the supply voltage is equal to or lower than the detection voltage of the power-on reset circuit, the power-on reset remains active, even if the RESETB pin is turned to "H".*

#### 5.1.4.2 Power-on Reset

The power-on reset is an internal factor reset that occurs when the power is turned on.

When power supply voltage goes on, if the supply voltage is equal to or lower than the releasing voltage of the power-on reset circuit, a reset signal is generated, and if it is higher than the releasing voltage of the power-on reset circuit, a reset signal is released.

When power supply voltage goes down, if the supply voltage is equal to or lower than the detecting voltage of the power-on reset circuit, a reset signal is generated. Refer to "5.2 Power-on Reset circuit".

#### 5.1.4.3 Voltage Detection Reset

The voltage detection reset is an internal factor reset that occurs when it is detected that the supply voltage has reached a predetermined detection voltage. Refer to "5.3 Voltage Detection Circuit".

#### 5.1.4.4 Watchdog Timer Reset

The watchdog timer reset is an internal factor reset that occurs when an overflow of the watchdog

timer is detected. Refer to "10.1 Watchdog Timer".

#### 5.1.4.5 System Clock Reset

The system clock reset is an internal factor reset that occurs when it is detected that the oscillation enable register is set to a combination that puts the CPU into deadlock. Refer to "6 System Clock Control".

#### 5.1.4.6 Flash Standby Reset

The flash standby reset is an internal factor reset generated by the reading or writing of data of the flash memory while it is on standby. Refer to "14 Flash Memory".

#### 5.1.4.7 Internal Factor Reset Detection Status Register

By reading the internal factor reset detection status register IRSTSR after the release of an internal factor reset, except the power-on reset, the factor which causes a reset can be detected.

The internal factor reset detection status register is initialized by an external reset input or power-on reset.

Set IRSTSR <FCLR> to "1" and write 0x71 to SYSCR4. This enables IRSTSR <FCLR> and the internal factor reset detection status register is clear to "0". IRSTSR <FCLR> is cleared to "0" automatically after initializing the internal factor reset detection status register.

*Note 1): Care must be taken in system designing since the IRSTSR may not fulfill its functions due to noises and other disturbances.*

*Note 2): After IRSTSR <FCLR> is modified, SYSCR4 should be written 0x71 (Enable code for IRSTSR <FCLR> in NORMAL mode when fcgck is fc/4 (CGCR <FCGCKSEL> = 00). Otherwise, IRSTSR <FCLR> may be enabled at unexpected timing.*

#### 5.1.4.8 How to Use P10 as an External Reset

To use P10 as an external reset, keep P10 at the "H" level until the power is turned on and the warm-up operation that follows reset release is finished.

After the warm-up operation that follows power-on reset is finished, set P1CR0 to "0", and connect a pull-up resistor to P10. Then clear SYSCR3 <RSTDIS> to "0" and write 0xB2 to SYSCR4. This enables the external reset function and makes P10 as a reset input pin.

To use the pin as an IO pin when it is used as a reset, set SYSCR3 <RSTDIS> to "1" and write 0xB2 to SYSCR4. This enables the IO function and makes the pin usable as an open-drain IO pin.

*Note 1): If you switch the external reset input pin to a port or switch the pin used as a port to the external reset input pin,*

do it when the pin is stabilized at the "H" level. Switching the pin function when the "L" level is input may cause a reset.

Note 2): If the external reset input is used as a port, the statement which clears SYSCR3 <RSTDIS> to "0" is not written in a program. By this abnormal execution of program, the external reset input set as a port may be changed as the external reset input at unexpected timing.

Note 3): After SYSCR3 <RSTDIS> is modified, SYSCR4 should be written 0xB2 (Enable code for SYSCR3 <RSTDIS>) in NORMAL 1 mode when fcgck is fc/4 (CGCR <FCGCKSEL> = 00). Otherwise, SYSCR3 <RSTDIS> may be enabled at unexpected timing.

## 5.2 Power-on Reset Circuit

The power-on reset circuit generates a reset when the power is turned on. When the supply voltage is lower than the detection voltage of the power-on reset circuit, a power-on reset signal is generated.

### 5.2.1 Configuration

The power-on reset circuit consists of a reference voltage generation circuit and a comparator. The supply voltage divided by ladder resistor is compared with the voltage generated by the reference voltage generation circuit by the comparator.

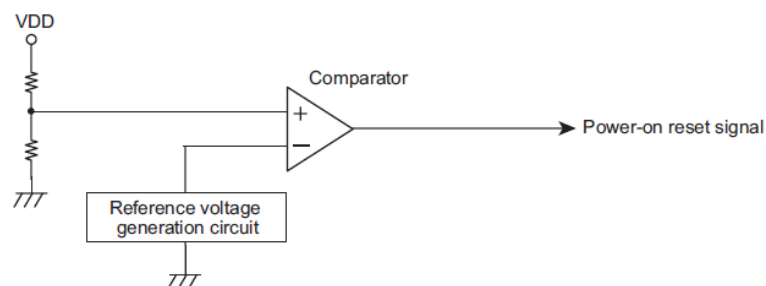


Figure 5.4 Power-on Reset Circuit

### 5.2.2 Function

When power supply voltage goes on, if the supply voltage is equal to or lower than the releasing voltage of the power-on reset circuit, a power-on reset signal is generated and if it is higher than the releasing voltage of the power-on reset circuit, a power-on reset signal is released.

When power supply voltage goes down, if the supply voltage is equal to or lower than the detecting voltage of the power-on reset circuit, a power-on reset signal is generated.

Until the power-on reset signal is generated, a warm-up circuit and a CPU is reset.

When the power-on reset signal is released, the warm-up circuit is activated. The reset of the CPU and peripheral circuits is released after the warm-up time that follows reset release has elapsed.

Increase the supply voltage into the operating range during the period from detection of the power-on reset release voltage until the end of the warm-up time that follows reset release. If the supply voltage has not reached the operating range by the end of the warm-up time that follows reset release, the MCU cannot operate properly.

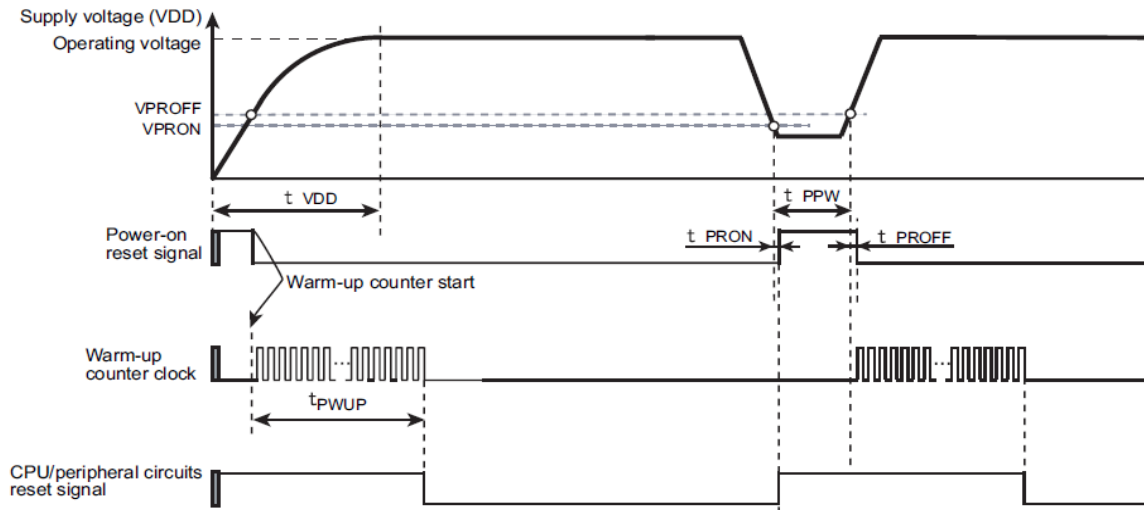


Figure 5.5 Operation Timing of Power-on Reset

Note 1): The power-on reset circuit may operate improperly, depending on fluctuations in the supply voltage (VDD). Refer to the electrical characteristics and take them into consideration when designing equipment.

Note 2): For the AC timing, refer to the electrical characteristics of each MQ8S MCU datasheet.

(V<sub>SS</sub>=0 V, T<sub>opr</sub> = -40 to 85°C)

Symbol	Parameter	Min.	Typ.	Max.	Unit
VPROFF	Power-on reset releasing voltage <sup>Note</sup>	1.45	1.6	1.75	V
VPRON	Power-on reset detecting voltage <sup>Note</sup>	1.35	1.5	1.65	
tPROFF	Power-on reset releasing response time	-	0.01	0.1	ms
tPRON	Power-on reset detecting response time	-	0.01	0.1	
tPRW	Power-on reset minimum pulse width	1.0	-	-	
tPWUP	Warming-up time after a reset is cleared	-	102 x 2 <sup>10</sup> /fc	-	s
tVDD	Power supply rise time	-	-	5	ms

Note 1: Because the power-on reset releasing voltage and the power-on reset detecting voltage change relative to one another, the detected voltage will never become inverted.

Note 2: A clock output by an oscillating circuit is used as the input clock for a warming-up counter. Because the oscillation frequency does not stabilize until an oscillating circuit stabilizes, some errors may be included in the warming-up time.

Note 3: Boost the power supply voltage such that tVDD becomes smaller than tPWUP.

Note 4: When turning on the power, it's fc=fosc.

## 5.3 Voltage Detection Circuit

The voltage detection circuit detects any decrease in the supply voltage and generates INTLVDisinterrupt request signals and voltage detection reset signals.

*Note): The voltage detection circuit may operate improperly, depending on fluctuations in the supply voltage (VDD). Refer to the electrical characteristics and take them into consideration when designing equipment.*

### 5.3.1 Configuration

The voltage detection circuit consists of a reference voltage generation circuit, a detection voltage level selection circuit, a comparator and control registers.

The supply voltage (VDD) is divided by the ladder resistor and input to the detection voltage selection circuit. A voltage is selected in the detection voltage selection circuit, depending on the detection voltage (VDxLVL), and compared to the reference voltage in the comparator. When the supply voltage (VDD) becomes lower than the detection voltage (VDxLVL), a voltage detection interrupt request signal or a voltage detection reset signal is generated. (x = 1 to 2)

Whether to generate a voltage detection reset signal or an INTLVD interrupt request signal can be programmed by software. In the former case, a voltage detection reset signal is generated when the supply voltage (VDD) becomes lower than the detection voltage (VDxLVL). In the latter case, an INTLVD interrupt request signal is generated when the supply voltage (VDD) falls to the detection voltage level.

*Note): Since the comparators used for voltage detection do not have a hysteresis structure, INTLVD interrupt request signals may be generated frequently if the supply voltage (VDD) is close to the detection voltage (VDxLVL). INTLVD interrupt request signals may be generated not only when the supply voltage falls to the detection voltage but also when it rises to the detection voltage.*

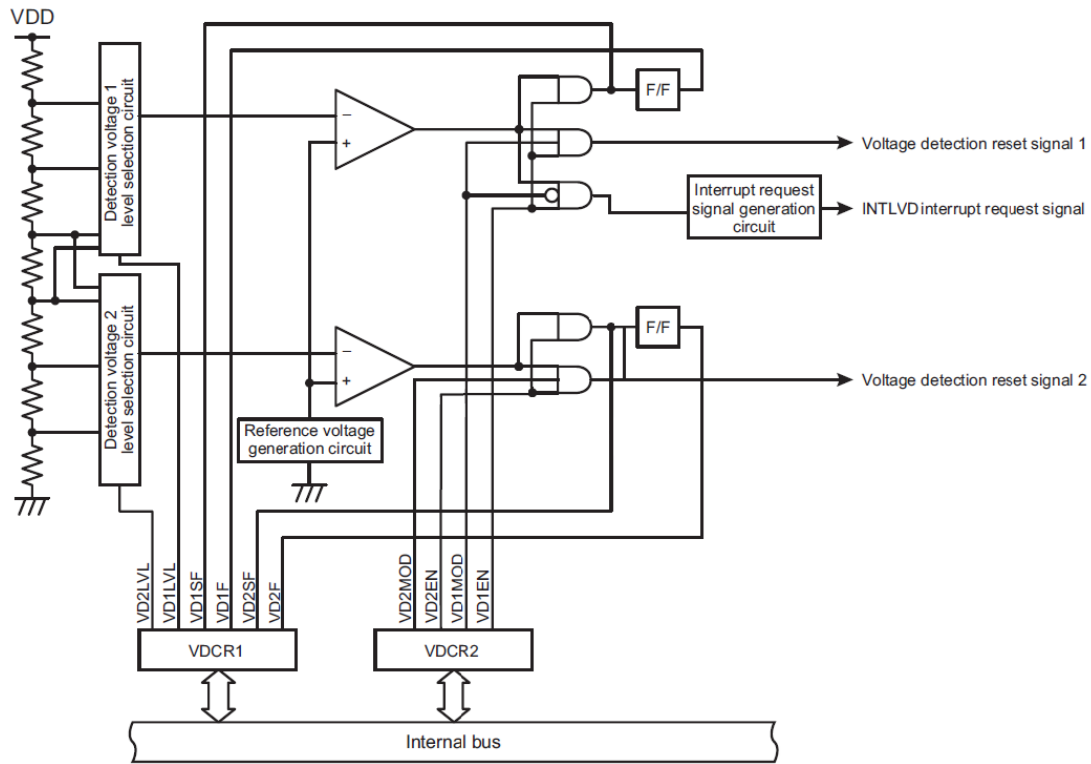


Figure 5.6 Voltage Detection Circuit

### 5.3.2 Control

The voltage detection circuit is controlled by voltage detection control registers 1 and 2.

#### Voltage Detection Control Register 1

<b>VDCR1 (0x0FC6)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	VD2F	VD2SF	VD2LVL		VD1F	VD1SF	VD1LVL	
Read/Write	R/W	R	R/W		R/W	R	R/W	
After reset	0	0	0	0	0	0	0	0

VD2F	Voltage detection 2 flag (Retain the state when VDD < VD2LVL is detected)		Read	Writer
		0 1	0: VDD ≥ VD2LVL 1: VDD < VD2LVL	Clears VD2F to "0" -
VD2SF	Voltage detection 2 status flag (Magnitude relation of VDD and VD2LVL when they are read)	0 1	0: VDD ≥ VD2LVL 1: VDD < VD2LVL	
		00 01 10 11	2.85V +/- 0.1 V 2.65V +/- 0.1 V 2.35V +/- 0.1 V 2.00V +/- 0.1 V	
VD1F	Voltage detection 1 flag (Retain the state when VDD < VD1LVL is detected)		Read	Writer
		0 1	0: VDD ≥ VD1LVL 1: VDD < VD1LVL	Clears VD1F to "0" -
VD1SF	Voltage detection 1 status flag (Magnitude relation of VDD and VD1LVL when they are read)	0 1	0: VDD ≥ VD1LVL 1: VDD < VD1LVL	

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

VD1LVL	Selection for detection voltage 1	00	4.50V +/- 0.15 V
		01	4.20V +/- 0.15 V
		10	3.70V +/- 0.15 V
		11	3.15V +/- 0.15 V

Note 1): VDCR1 is initialized by a power-on reset or an external reset input.

Note 2): When VD2F or VD1F is cleared by the software and is set due to voltage detection at the same time, the setting due to voltage detection is given priority.

Note 3): VD2F and VD1F cannot be programmed to "1" by the software.

### Voltage Detection Control Register 2

VDCR2 (0x0FC7)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	"0"	"0"	VD2MOD	VD2EN	VD1MOD	VD1EN
Read/Write	R	R	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

VD2MOD	Select the operation mode of voltage detection 2	0: Generate a INTLVD interrupt request signal 1: Generate a voltage detection reset 2 signal
VD2EN	Enable / disable the operation of voltage detection 2	0: Disable the operation of voltage detection 2 1: Enable the operation of voltage detection 2
VD1MOD	Select the operation mode of voltage detection 1	0: Generate a INTLVD interrupt request signal 1: Generate a voltage detection reset 1 signal
VD1EN	Enable / disable the operation of voltage detection 1	0: Disable the operation of voltage detection 1 1: Enable the operation of voltage detection 1

Note 1): VDCR2 is initialized by a power-on reset or an external reset input.

Note 2): Bits 7 and 6 of VDCR2 are read as "0".

Note 3): Bits 5 and 4 of VDCR2 should be cleared to "0".

Note 4): To use VD2LVL, besides bit 3 and bit 2, bit 0 of VDCR2 should also be set as "1".

## 5.3.3 Function

Two detection voltages (VDxLVL, x = 1 to 2) can be set in the voltage detection circuit. For each voltage, enabling/disabling the voltage detection and the operation to be executed when the supply voltage (VDD) falls to or below the detection voltage (VDxLVL) can be programmed.

### 5.3.3.1 Enabling / Disabling the Voltage Detection Operation

Setting VDCR2 <VDxEN> to "1" enables the voltage detection operation. Setting it to "0" disables the operation. VDCR2 <VDxEN> is cleared to "0" immediately after a power-on reset or a reset by an external reset input is released.


Note): When the supply voltage (VDD) is lower than the detection voltage (VDxLVL), setting VDCR2 <VDxEN> to "1" generates an INTLVD interrupt request signal or a voltage detection reset signal at the time.

### 5.3.3.2 Selecting the Voltage Detection Operation Mode

When VDCR2 <VDxMOD> is set to "0", the voltage detection operation mode is set to generate INTLVD interrupt request signals. When VDCR2 <VDxMOD> is set to "1", the operation mode is set to generate voltage detection reset signals.

**(a) When the operation mode is set to generate INTLVD interrupt signals  
(VDCR2 <VDxMOD>="0")**

When VDCR2 <VDxEN>="1", an INTLVD interrupt request signal is generated when the supply voltage (VDD) falls to the detection voltage (VDxLVL).

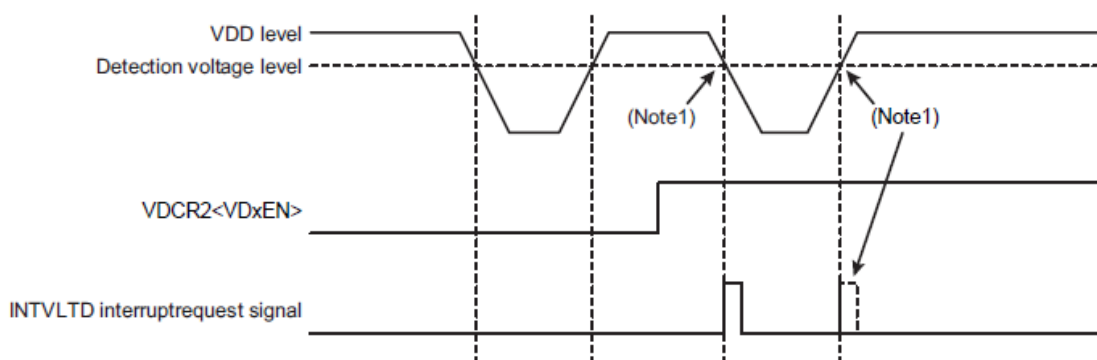

**Figure 5.7 Voltage Detection Interrupt Request**

*Note 1): Since the comparators used for voltage detection do not have a hysteresis structure, INTLVD interrupt request signals may be generated frequently when the supply voltage (VDD) is close to the detection voltage (VDxLVL). INTLVD interrupt request signals may be generated not only when the supply voltage falls to the detection voltage but also when it rises to the detection voltage.*

*Note 2): If the supply voltage (VDD) falls to the detection voltage (VDxLVL) during IDLE0 or SLEEP0 mode, an INTLVD interrupt request signal is generated after the TBT counts the specified period and IDLE0 or SLEEP0 mode is released.*

**(b) When the operation mode is set to generate voltage detection reset signals  
(VDCR2 <VDxMOD>="1")**

When VDCR2 <VDxEN> = "1", a voltage detection reset signal is generated when the supply voltage (VDD) becomes lower than the detection voltage (VDxLVL).

VDCR1 and VDCR2 are initialized by a power-on reset or an external reset input only. A voltage detection reset signal is generated continuously as long as the supply voltage (VDD) is lower than the detection voltage (VDxLVL).

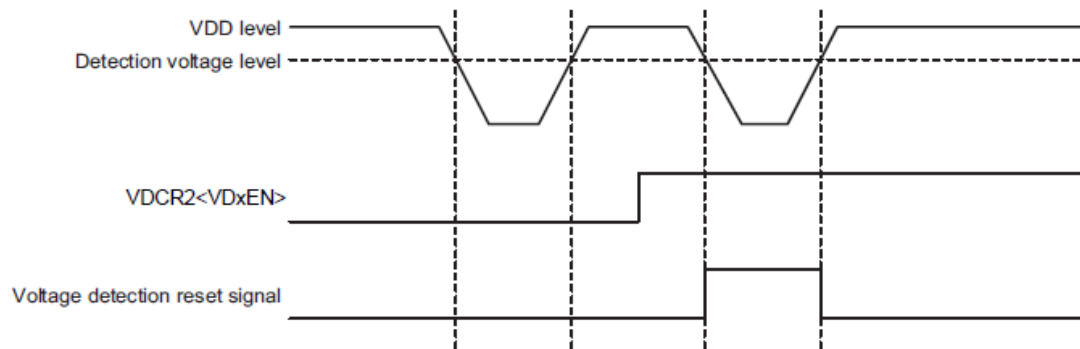


Figure 5.8 Voltage Detection Reset Signal

### 5.3.3.3 Selecting the Detection Voltage Level

Select a detection voltage at VDCR1<VDxLVL>.

### 5.3.3.4 Voltage Detection Flag and Voltage Detection Status Flag

The magnitude relation between the supply voltage (VDD) and the detection voltage (VDxLVL) can be checked by reading VDCR1 <VDxF> and VDCR1 <VDxSF>.

If VDCR2 <VDxEN> is set at "1", when the supply voltage (VDD) becomes lower than the detection voltage (VDxLVL), VDCR1 <VDxF> is set to "1" and is held in this state. VDCR1<VDxF> is not cleared to "0" when the supply voltage (VDD) becomes equal to or higher than the detection voltage (VDxLVL).

When VDCR2 <VDxEN> is cleared to "0" after VDCR1 <VDxF> is set to "1", the previous state is still held. To clear VDCR1 <VDxF>, "0" must be written to it.

If VDCR2 <VDxEN> is set at "1", when the supply voltage (VDD) becomes lower than the detection voltage (VDxLVL), VDCR1 <VDxSF> is set to "1". When the supply voltage (VDD) becomes equal to or higher than the detection voltage (VDxLVL), VDCR1 <VDxSF> is cleared to "0".

Unlike VDCR1 <VDxF>, VDCR1 <VDxSF> does not hold the set state.

*Note 1): When the supply voltage (VDD) becomes lower than the detection voltage (VDxLVL) in the STOP, IDLE0 or SLEEP0 mode, the voltage detection flag and the voltage detection status flag are changed after the operation mode is returned to NORMAL or SLOW mode.*

*Note 2): Depending on the voltage detection timing, the voltage detection status flag (VDxSF) may be changed earlier than the voltage detection flag (VD2F) by a maximum of 2/fcgck[s].*

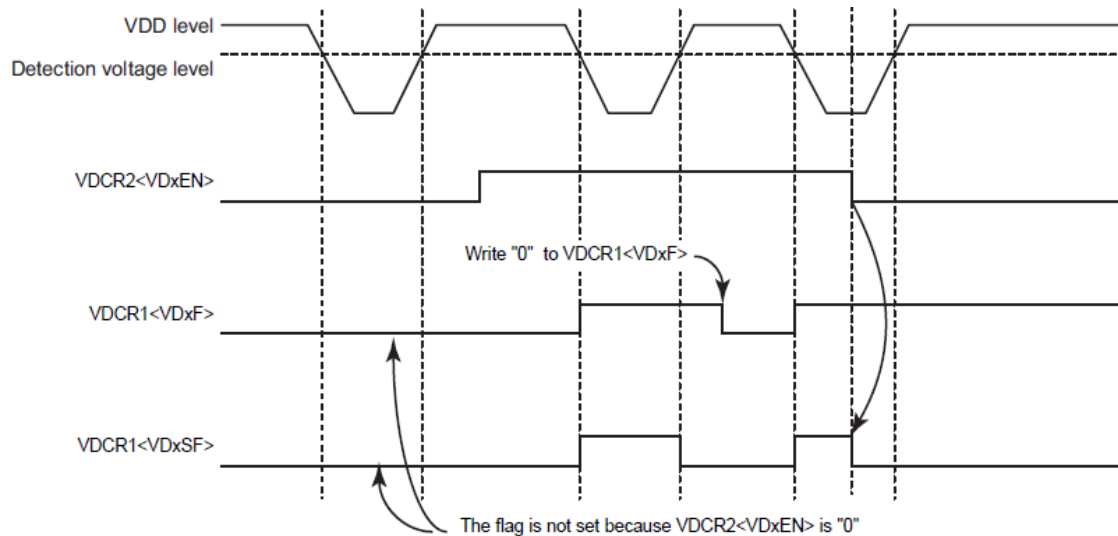


Figure 5.9 Changes in the Voltage Detection Flag and the Voltage Detection Status Flag

### 5.3.4 Register Setting

#### 5.3.4.1 When the Operation Mode is Set to Generate INTLVD Interrupt Request Signals

When the operation mode is set to generate INTLVD interrupt request signal, make the following setting:

1. Clear the voltage detection circuit interrupt enable flag to "0".
2. Set the detection voltage at VDCR1<VDxLVL>, x = 1 to 2.
3. Clear VDCR2 <VDxMOD> to "0" to set the operation mode to generate INTLVD interrupt request signals.
4. Set VDCR2<VDxEN> to "1" to enable the voltage detection operation.
5. Wait for 5  $\mu$ s or more until the voltage detection circuit becomes stable.
6. Make sure that VDCR1 <VDxSF> is "0".
7. Clear the voltage detection circuit interrupt latch to "0" and set the interrupt enable flag to "1" to enable interrupts.

*Note): When the supply voltage (VDD) is close to the detection voltage (VDxLVL), voltage detection request signals may be generated frequently. If this may pose any problem, execute appropriate wait processing depending on fluctuations in the system power supply and clear the interrupt latch before returning from the INTLVD interrupt service routine.*

To disable the voltage detection circuit while it is enabled with the INTLVD interrupt request, make the following setting:

1. Clear the voltage detection circuit interrupt enable flag to "0".
2. Clear VDCR2 <VDxEN> to "0" to disable the voltage detection operation.

*Note): If the voltage detection circuit is disabled without clearing interrupt enable flag, unexpected interrupt request may occur.*

#### 5.3.4.2 When the Operation Mode is Set to Generate Voltage Detection Reset Signals

When the operation mode is set to generate voltage detection reset signals, make the following setting:

1. Clear the voltage detection circuit interrupt enable flag to "0".
2. Set the detection voltage at VDCR1 <VDxLVL>, x = 1 to 2.
3. Clear VDCR2 <VDxMOD> to "0" to set the operation mode to generate INTLVD interrupt request signals.
4. Set VDCR2 <VDxEN> to "1" to enable the voltage detection operation.
5. Wait for 5  $\mu$ s or more until the voltage detection circuit becomes stable.
6. Make sure that VDCR1 <VDxSF> is "0".
7. Clear VDCR1 <VDxF> to "0".
7. Set VDCR2 <VDxMOD> to "1" to set the operation mode to generate voltage detection reset signals.

*Note 1): VDCR1 and VDCR2 are initialized by a power-on reset or an external reset input only. If the supply voltage (VDD) becomes lower than the detection voltage (VDxLVL) in the period from release of the voltage detection reset until clearing of VDCR2 <VDxEN> to "0", a voltage detection reset signal is generated immediately.*

*Note 2): The voltage detection reset signals are generated continuously as long as the supply voltage (VDD) is lower than the detection voltage (VDxLVL).*

To disable the voltage detection circuit while it is enabled with the voltage detection reset, make the following setting:


1. Clear the voltage detection circuit interrupt enable flag to "0".
2. Clear VDCR2 <VDxMOD> to "0" to set the operation mode to generate INTLVD interrupt request signals.
3. Clear VDCR2 <VDxEN> to "0" to disable the voltage detection operation.

*Note): If the voltage detection circuit is disabled without clearing interrupt enable flag, unexpected interrupt request may occur.*

## 6. System Clock Controller

### 6.1 Configuration

The system clock controller consists of a clock generator, a clock gear, a timing generator, a warm-up counter and an operation mode control circuit.

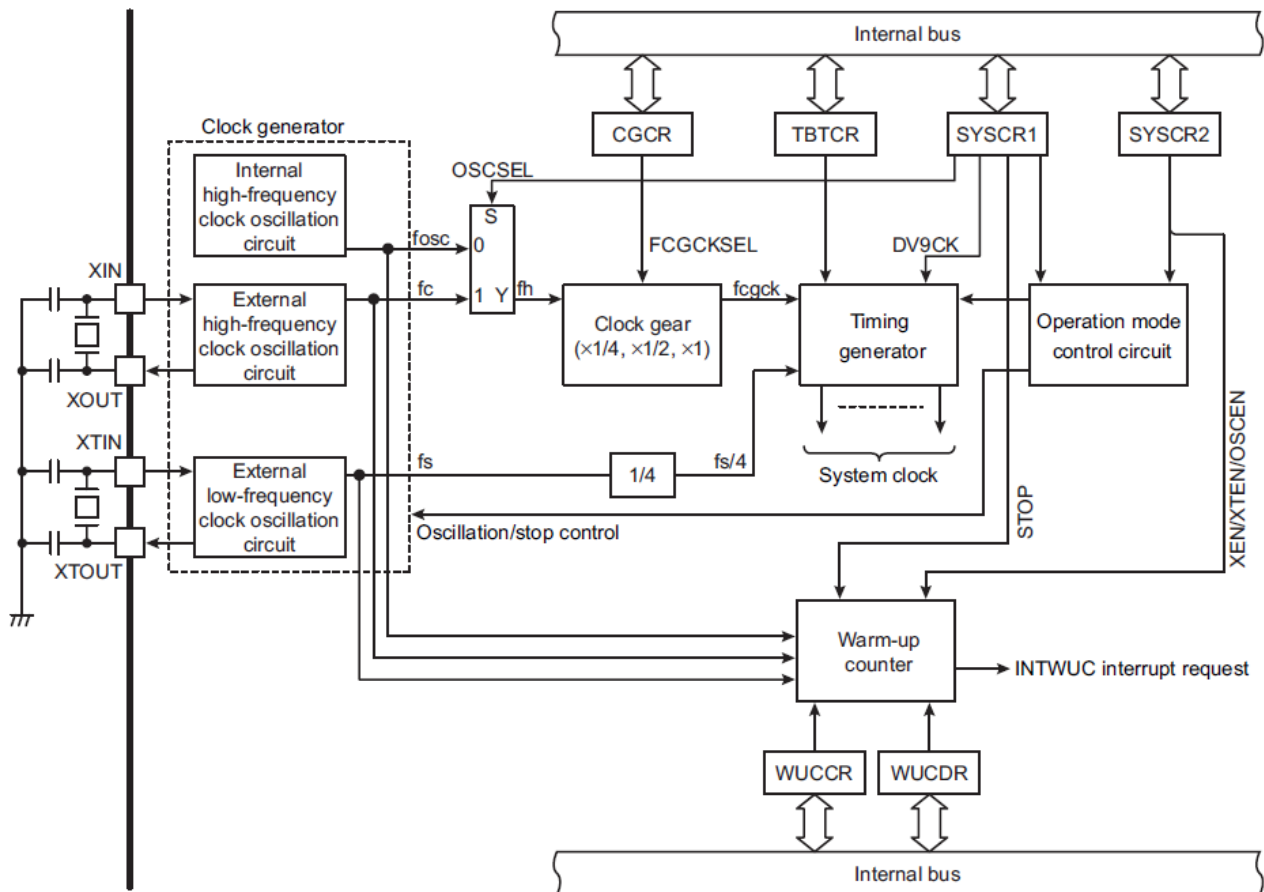

Note 1): It's unnecessary to add extra capacitor in circuit when using external crystal because there is an internal RC in MCU.

Note 2): The location of external crystal is recommended to be as close to MCU as possible.

Figure 6.1 System Clock Controller

### 6.2 Control

The system clock controller is controlled by system control register 1 (SYSCR1), system control register 2 (SYSCR2), the warm-up counter control register (WUCCR), the warm-up counter data register (WUCDR) and the clock gear control register (CGCR).

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

**System Control Register 1**

SYSCR1 (0x0FDC)	7	6	5	4	3	2	1	0
Bit Symbol	STOP	RELM	OUTEN	DV9CK	OSCSEL	-	-	-
Read/Write	R/W	R/W	R/W	R/W	R/W	R	R	R
After reset	0	0	0	0	0	0	0	0

STOP	Activate the STOP mode	0 1	Operate the CPU and the peripheral circuit Stop the CPU and the peripheral circuit (activate the STOP mode)
RELM	Select the STOP mode release method	0 1	Edge-sensitive release mode (Release the STOP mode at the rising edge of the STOP mode release signal) Level-sensitive release mode (Release the STOP mode at the "H" level of the STOP mode release signal)
OUTEN	Select the port output state in the STOP mode	0 1	High impedance Output hold
DV9CK	Select the input clock to stage 9 of the divider	0 1	$fcgck/2^9$ $fs/4$
OSCSEL	Select the high-frequency reference clock (fh)	0 1	Internal high-frequency clock (fosc) External high-frequency clock (fc)

Note 1): fosc: Internal high-frequency clock [Hz], fc: External high-frequency clock [Hz], fcgck: Gear clock [Hz], fs: External low-frequency clock [Hz]

Note 2): Bits 2, 1 and 0 of SYSCR1 are read as "0".

Note 3): If the STOP mode is activated with SYSCR1 <OUTEN> set at "0", the port internal input is fixed to "0". Therefore, an external interrupt may be set at the falling edge, depending on the pin state when the STOP mode is activated.

Note 4): Writing of the second byte data will be executed improperly if the operation is switched to the STOP state by an instruction, such as LDW, which executes 2-byte data transfer at a time.

Note 5): Don't set SYSCR1 <DV9CK> to "1" before the oscillation of the external low-frequency clock oscillation circuit becomes stable.

Note 6): In the SLOW1/2 or SLEEP1 mode,  $fs/4$  is input to stage 9 of the divider, regardless of the state of SYSCR1 <DV9CK>.

Note 7): SYSCR1 <OSCSEL> should be set while SYSCR2 <SYSCK> is "0" (during the NORMAL1 or NORMAL2 mode). Writing to SYSCR1 <OSCSEL> while SYSCR2 <SYSCK> = "1" (during the SLOW1 or SLOW2 mode) has no effect.

**System Control Register 2**

SYSCR2 (0x0FDD)	7	6	5	4	3	2	1	0
Bit Symbol	OSCEN	XEN	XTEN	SYSCK	IDLE	TGHALT	-	-
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R	R
After reset	1	0	0	0	0	0	0	0

OSCEN	Control internal high-freq. clock (fosc)	0 1	Disable internal high-frequency clock oscillation circuit Enable internal high-frequency clock oscillation circuit
XEN	Control the external high-freq. clock (fc)	0 1	Stop oscillation Continue or start oscillation
XTEN	Control the external low-freq. clock (fs)	0 1	Stop oscillation Continue or start oscillation

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

SYSCK	Select a system clock	0 1	Gear clock (fcgck) (NORMAL1/2 or IDLE1/2 mode) Low-frequency clock (fs/4) (SLOW1/2 or SLEEP1 mode)
IDLE	CPU and WDT control (IDLE1/2 or SLEEP1 mode)	0 1	Operate the CPU and the WDT Stop the CPU and the WDT (Activate IDLE1/2 or SLEEP1 mode)
TGHALT	TG control (IDLE0 or SLEEP0 mode)	0 1	Enable the clock supply from the TG to all the peripheral circuits Disable the clock supply from the TG to the peripheral circuits except the TBT(Activate IDLE0 or SLEEP0 mode)

Note 1): fosc: Internal high-frequency clock [Hz], fc: External high-frequency clock [Hz], fcgck: Gear clock [Hz], fs: External low-frequency clock [Hz]

Note 2): WDT: Watchdog timer, TG: Timing generator

Note 3): Don't set both SYSCR2 <IDLE> and SYSCR2 <TGHALT> to "1" simultaneously.

Note 4): Writing of the second byte data will be executed improperly if the operation is switched to the IDLE state by an instruction, such as LDW, which executes 2-byte data transfer at a time.

Note 5): When the IDLE1/2 or SLEEP1 mode is released, SYSCR2 <IDLE> is cleared to "0" automatically.

Note 6): When the IDLE0 or SLEEP0 mode is released, SYSCR2 <TGHALT> is cleared to "0" automatically.

Note 7): To Switch the frequency, first set the new frequency, then turn off the original frequency.

#### Warm-up Counter Control Register

WUCCR (0x0FCD)	7	6	5	4	3	2	1	0
Bit Symbol	WUCRST	-	-	-	WUCDIV		WUCSEL	
Read/Write	W	R	R	R	R/W		R/W	
After reset	0	0	0	0	1	1	0	0

WUCRST	Reset and stop the warm-up counter	0 1	- Clear and stop the counter
WUCDIV	Select the frequency division of the warm-up counter source clock	00 01 10 11	Sourceclock Sourceclock/2 Sourceclock/2 <sup>2</sup> Sourceclock/2 <sup>3</sup>
WUCSEL	Select the warm-up counter source clock	00 01 10 11	Select the internal high-frequency clock (fosc) Select the external high-frequency clock (fc) Select the external low-frequency clock (fs) Reserved

Note 1): fosc: Internal high-frequency clock [Hz], fc: External high-frequency clock [Hz], fcgck: Gear clock [Hz], fs: External low-frequency clock [Hz]

Note 2): WUCCR <WUCRST> is cleared to "0" automatically, and need not be cleared to "0" after bring set to "1".

Note 3): Bits 7 to 4 of WUCCR are read as "0".

Note 4): Before starting the warm-up counter operation, set the source clock and the frequency division rate at WUCCR and set the warm-up time at WUCDR.

### Warm-up Counter Data Register

WUCDR (0x0FCE)	7	6	5	4	3	2	1	0
Bit Symbol	WUCDR							
Read/Write	R/W							
After reset	0	1	1	0	0	1	1	0

WUCDR	Warm-up time setting
-------	----------------------

Note1: Don't start the warm-up counter operation with WUCDR set at "0x00".

### Clock Gear Control Register

CGCR (0x0FCF)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	-	-	-	FCGCKSEL	
Read/Write	R	R	R	R	R	R	R/W	
After reset	0	0	0	0	0	0	0	0

FCGCKSEL	Clock gear setting	00	fcgck = fc / 4
		01	fcgck = fc / 2
		10	fcgck = fc
		11	Reserved

Note 1): fh: High-frequency reference clock [Hz], fcgck: Gear clock [Hz]

Note 2): Don't change CGCR <FCGCKSEL> in the SLOW mode.

Note 3): Bits 7 to 2 of CGCR are read as "0".

## 6.3 Function

### 6.3.1 Clock Generator

The clock generator generates the basic clock for the system clocks to be supplied to the CPU core and peripheral circuits. It contains two oscillation circuits: one for the high-frequency clock and the other for the low-frequency clock.

The oscillation circuit pins are also used as ports P0. For the setting to use them as ports, refer to the chapter of I/O Ports. To use ports P00 and P01 as the high-frequency clock oscillation circuits (the XIN and XOUT pins), set P0FC0 to "1" and then set SYSCR2 <XEN> to "1".

The high-frequency (fc) clock and the low-frequency (fs) clock can easily be obtained by connecting an oscillator between the XIN and XOUT pins.

The software control is executed by SYSCR2 <XEN>, SYSCR2 <XTEN> and the P0 port function control

register P0FC. The hardware control is executed by reset release and the operation mode control circuit when the operation is switched to the STOP mode as described in "4.3.1 Operation Mode Control Circuit".


*Note): No hardware function is available for external direct monitoring of the basic clock. The oscillation frequency can be adjusted by programming the system to output pulses at a certain frequency to a port (for example, a clock output) with interrupts disabled and the watchdog timer disabled and monitoring the output. An adjustment program must be created in advance for a system that requires adjustment of the oscillation frequency.*

To prevent the dead lock of the CPU core due to the software-controlled enabling/disabling of the oscillation, an internal factor reset is generated depending on the combination of values of the clock selected as the main system clock, SYSCR2 <XEN>, SYSCR2 <XTEN> and the P0 port function control register P0FC0.

P0FC0	SYSCR2 <XEN>	SYSCR2 <XTEN>	SYSCR2 <SYSCK>	State
Don't Care	0	0	Don't Care	All the oscillation circuits are stopped.
Don't Care	Don't Care	0	1	The low-frequency clock (fs) is selected as the main system clock, but the low-frequency clock oscillation circuit is stopped.
Don't Care	0	Don't Care	0	The high-frequency clock (fc) is selected as the main system clock, but the high-frequency clock oscillation circuit is stopped.
0	1	Don't Care	Don't Care	The high-frequency clock oscillation circuit is allowed to oscillate, but the port is set as a general-purpose port.

**Table 6.1 Prohibited Combinations of Oscillation Enable Register Conditions**

*Note): It takes a certain period of time after SYSCR2 <SYSCK> is changed before the main system clock is switched. If the currently operating oscillation circuit is stopped before the main system clock is switched, the internal condition becomes as shown in Table 6.1 and a system clock reset occurs. For details of clock switching, refer to "4.3.2 Operation Mode Control".*

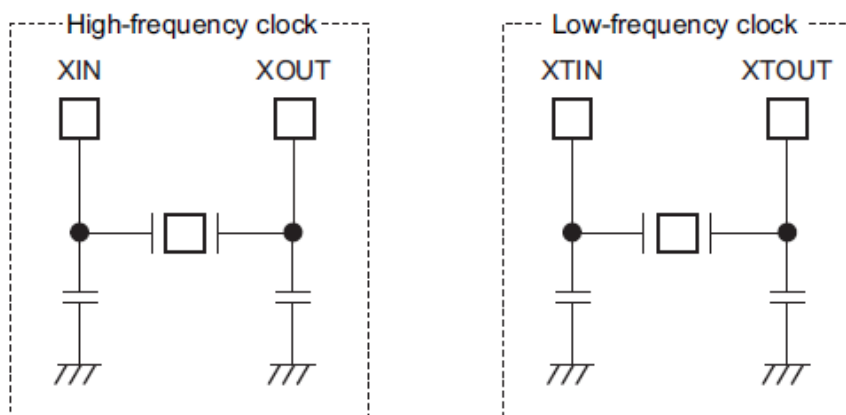

**Figure 6.2 Examples of Oscillator Connection**

*Note 1) : The appropriate oscillation circuit and providing proper capacitance are necessary for stable clock, these are highly correlated with the circuit board. System must be confirmed stable after all the components on the board is mounted.*

*Note 2) : XIN/XOUT pin has build-in capacitance (6pF each). Load capacitance can be designed according to character of oscillator, accuracy of clock and design of circuit board*

### 6.3.2 Clock Gear

The clock gear is a circuit that selects a gear clock (fcgck) obtained by dividing the high-frequency reference clock (fh) and inputs it to the timing generator. Select a divided clock at CGCR <FCGCKSEL>.

Two machine cycles are needed after CGCR <FCGCKSEL> is changed before the gear clock (fcgck) is changed.

CGCR <FCGCKSEL>	fcgck
00	fh / 4
01	fh / 2
10	fh
11	Reserved

**Table 6.2** Gear Clock (fcgck)


The gear clock (fcgck) may be longer than the set clock width, immediately after CGCR <FCGCKSEL> is changed. Immediately after reset release, the gear clock (fcgck) becomes the clock that is a quarter of the high-frequency reference clock (fh).

*Note): Don't change CGCR <FCGCKSEL> in the SLOW mode. This may stop the gear clock (fcgck) from being changed.*

### 6.3.3 Timing Generator

The timing generator is a circuit that generates system clocks to be supplied to the CPU core and the peripheral circuits, from the gear clock (fcgck) or the clock that is a quarter of the low-frequency clock (fs). The timing generator has the following functions:

1. Generation of the main system clock (fm)
2. Generation of clocks for the timer counter, the time base timer and other peripheral circuits

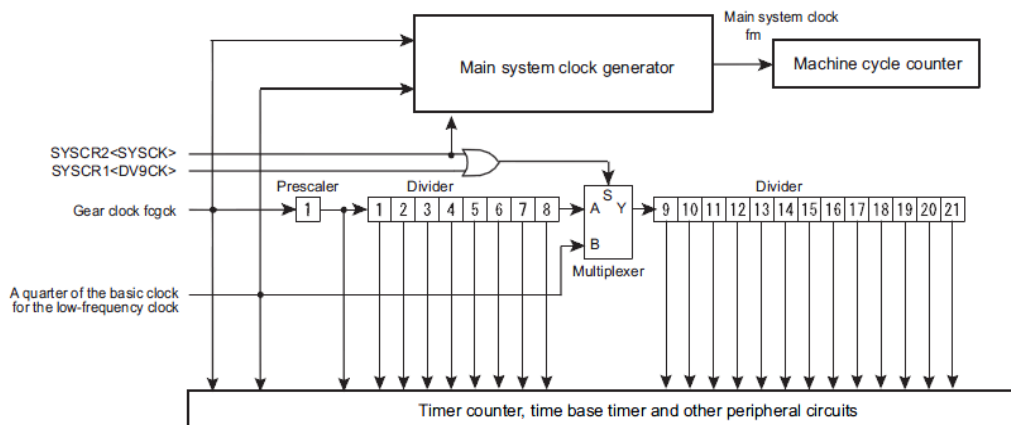

**Figure 6.3 Configuration of Timing Generator**

The timing generator consists of a main system clock generator, a prescaler, a 21-stage divider and a machine cycle counter.

### 6.3.3.1 Main System Clock Generator

This circuit selects the gear clock (fcgck) or the clock that is a quarter of the low-frequency clock (fs) for the main system clock (fm) to operate the CPU core.

Clearing SYSCR2 <SYSCK> to "0" selects the gear clock (fcgck). Setting it to "1" selects the clock that is a quarter of the low-frequency clock (fs).

### 6.3.3.2 Prescaler and Divider

These circuits divide fcgck. The divided clocks are supplied to the timer counter, the time base timer and other peripheral circuits.

When both SYSCR1 <DV9CK> and SYSCR2 <SYSCK> are "0", the input clock to stage 9 of the divider becomes the output of stage 8 of the divider.

When SYSCR1 <DV9CK> or SYSCR2 <SYSCK> is "1", the input clock to stage 9 of the divider becomes fs/4. When SYSCR2 <SYSCK> is "1", the outputs of stages 1 to 8 of the divider and prescaler are stopped.

The prescaler and divider are cleared to "0" at a reset and at the end of the warm-up operation that follows the release of STOP mode.

### 6.3.3.3 Machine Cycle

Instruction execution is synchronized with the main system clock (fm).

The minimum instruction execution unit is called a "machine cycle". One machine cycle corresponds to one main system clock.

There are a total of 11 different types of instructions for the i87 Series: 10 types ranging from 1-cycle instructions, which require one machine cycle for execution, to 10-cycle instructions, which require 10 machine cycles for execution, and 13-cycle instructions, which require 13 machine cycles for execution.

## 6.4 Warm-up Counter

The warm-up counter is a circuit that counts the internal high-frequency clock ( $f_{osc}$ ), the external high-frequency clock ( $f_c$ ) and the external low-frequency clock ( $f_s$ ), and it consists of a source clock selection circuit, a 3-stage frequency division circuit and a 14-stage counter.

The warm-up counter is used to secure the time after a power-on reset is released before the supply voltage becomes stable and secure the time after the STOP mode is released or the operation mode is changed before the oscillation by the oscillation circuit becomes stable.

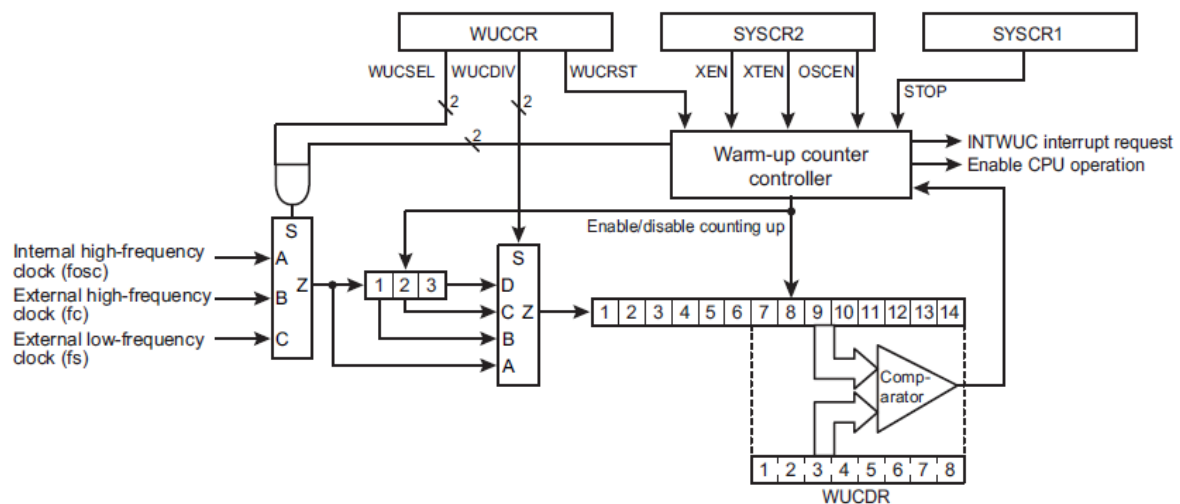


Figure 6.4 Warm-up Counter Circuit

### 6.4.1 Warm-up Counter Operation When the Oscillation is Enabled by Hardware

#### 6.4.1.1 When a Power-on Reset is Released or a Reset is Released

The warm-up counter serves to secure the time after a power-on reset is released before the supply voltage becomes stable and the time after a reset is released before the oscillation by the high-frequency clock oscillation circuit becomes stable.

When the power is turned on and the supply voltage exceeds the power-on reset release voltage, the warm-up counter reset signal is released. At this time, the CPU and the peripheral circuits are held in the reset state.

A reset signal initializes WUCCR <WUCSEL> to "0" and WUCCR <WUCDIV> to "11", which selects the high-frequency clock (fc) as the input clock to the warm-up counter.

When a reset is released for the warm-up counter, the internal high-frequency clock (fosc) is input to the warm-up counter, and the 14-stage counter starts counting the internal high-frequency clock (fosc).

When the upper 8 bits of the warm-up counter become equal to WUCDR, counting is stopped and a reset is released for the CPU and the peripheral circuits.

WUCDR is initialized to 128 (decimal value) after reset release, which makes the warm-up time  $102 \times 2^9 / f_c$  [s].

*Note): The clock output from the oscillation circuit is used as the input clock to the warm-up counter. The warm-up time contains errors because the oscillation frequency is unstable until the oscillation circuit becomes stable.*

#### 6.4.1.2 When the STOP Mode is Released

The warm-up counter serves to secure the time after the oscillation is enabled by the hardware before the oscillation becomes stable at the release of the STOP mode.

The high-frequency clock (fc) or the low-frequency clock (fs), which generates the main system clock when the STOP mode is activated, is selected as the input clock for frequency division circuit, regardless of WUCCR <WUCSEL>. Before the STOP mode is activated, select the division rate of the input clock to the warm-up counter at WUCCR <WUCDIV> and set the warm-up time at WUCDR.

When the STOP mode is released, the 14-stage counter starts counting the input clock selected in the frequency division circuit.

When the upper 8 bits of the warm-up counter become equal to WUCDR, counting is stopped and the operation is restarted by an instruction that follows the STOP mode activation instruction.

Clock that generated the main system clock when the STOP mode was activated	WUCCR <WUCSEL>	WUCCR <WUCDIV>	Counter input clock	Warm-up time
fosc	Don't Care	00	fosc	$2^6 / \text{fosc}$ to $255 \times 2^6 / \text{fosc}$
		01	$\text{fosc} / 2$	$2^7 / \text{fosc}$ to $255 \times 2^7 / \text{fosc}$
		10	$\text{fosc} / 2^2$	$2^8 / \text{fosc}$ to $255 \times 2^8 / \text{fosc}$
		11	$\text{fosc} / 2^3$	$2^9 / \text{fosc}$ to $255 \times 2^9 / \text{fosc}$
fc	Don't Care	00	fc	$2^6 / \text{fc}$ to $255 \times 2^6 / \text{fc}$
		01	$\text{fc} / 2$	$2^7 / \text{fc}$ to $255 \times 2^6 / \text{fc}$
		10	$\text{fc} / 2^2$	$2^8 / \text{fc}$ to $255 \times 2^8 / \text{fc}$
		11	$\text{fc} / 2^3$	$2^9 / \text{fc}$ to $255 \times 2^9 / \text{fc}$
fs	Don't Care	00	fs	$2^6 / \text{fs}$ to $255 \times 2^6 / \text{fs}$
		01	$\text{fs} / 2$	$2^7 / \text{fs}$ to $255 \times 2^7 / \text{fs}$
		10	$\text{fs} / 2^2$	$2^8 / \text{fs}$ to $255 \times 2^8 / \text{fs}$
		11	$\text{fs} / 2^3$	$2^9 / \text{fs}$ to $255 \times 2^9 / \text{fs}$

Note 1): When the operation is switched to the STOP mode during the warm-up for the oscillation enabled by the software, the warm-up counter holds the value at the time and restarts counting after the STOP mode is released. In this case, the warm-up time at the release of the STOP mode becomes insufficient. Don't switch the operation to the STOP mode during the warm-up for the oscillation enabled by the software.

Note 2): The clock output from the oscillation circuit is used as the input clock to the warm-up counter. The warm-up time contains errors because the oscillation frequency is unstable until the oscillation circuit becomes stable. Set the sufficient time for the oscillation start property of the oscillator.

## 6.4.2 Warm-up Counter Operation When the Oscillation is Enabled by Software

The warm-up counter serves to secure the time after the oscillation is enabled by the software before the oscillation becomes stable, at a mode change from NORMAL1 to NORMAL2 or from SLOW1 to SLOW2. Select the input clock to the frequency division circuit at WUCCR <WUCSEL>. Select the input clock to the 14-stage counter at WUCCR <WUCDIV>.

After the warm-up time is set at WUCDR, setting SYSCR2 <OSCEN>, SYSCR2 <XEN> or SYSCR2 <XTEN> to "1" allows the stopped oscillation circuit to start oscillation and the 14-stage counter to start counting the selected input clock. When the upper 8 bits of the counter become equal to WUCDR, an INTWUC interrupt occurs, counting is stopped and the counter is cleared.

Set WUCCR <WUCRST> to "1" to discontinue the warm-up operation. By setting it to "1", the count-up operation is stopped, the warm-up counter is cleared, and WUCCR <WUCRST> is cleared to "0". SYSCR2 <OSCEN>, SYSCR2 <XEN> and SYSCR2 <XTEN> hold the values when WUCCR <WUCRST> is set to "1". To restart the warm-up operation, SYSCR2 <OSCEN>, SYSCR2 <XEN> or SYSCR2 <XTEN> must be cleared to "0".

WUCCR <WUCSEL>	WUCCR <WUCDIV>	Counter input clock	Warm-up time
00	00	fosc	$2^6 / \text{fosc}$ to $255 \times 2^6 / \text{fosc}$
	01	fosc / 2	$2^7 / \text{fosc}$ to $255 \times 2^7 / \text{fosc}$
	10	fosc / 2 <sup>2</sup>	$2^8 / \text{fosc}$ to $255 \times 2^8 / \text{fosc}$
	11	fosc / 2 <sup>3</sup>	$2^9 / \text{fosc}$ to $255 \times 2^9 / \text{fosc}$
01	00	fc	$2^6 / \text{fc}$ to $255 \times 2^6 / \text{fc}$
	01	fc / 2	$2^7 / \text{fc}$ to $255 \times 2^7 / \text{fc}$
	10	fc / 2 <sup>2</sup>	$2^8 / \text{fc}$ to $255 \times 2^8 / \text{fc}$
	11	fc / 2 <sup>3</sup>	$2^9 / \text{fc}$ to $255 \times 2^9 / \text{fc}$
10	00	fs	$2^6 / \text{fs}$ to $255 \times 2^6 / \text{fs}$
	01	fs / 2	$2^7 / \text{fs}$ to $255 \times 2^7 / \text{fs}$
	10	fs / 2 <sup>2</sup>	$2^8 / \text{fs}$ to $255 \times 2^8 / \text{fs}$
	11	fs / 2 <sup>3</sup>	$2^9 / \text{fs}$ to $255 \times 2^9 / \text{fs}$

Note 1): The warm-up counter starts counting when SYSCR2 <OSCEN>, SYSCR2 <XEN> or SYSCR2 <XTEN> is changed from "0" to "1". The counter will not start counting by writing "1" to SYSCR2 <OSCEN>, SYSCR2 <XEN> or SYSCR2 <XTEN> when it is in the state of "1".

Note 2): The clock output from the oscillation circuit is used as the input clock to the warm-up counter. The warm-up time contains errors because the oscillation frequency is unstable until the oscillation circuit becomes stable. Set the sufficient time for the oscillation start property of the oscillator.

## 7. Interrupts

MQ6905 has a total of 18 interrupt sources excluding reset. Interrupts can be nested with priorities. Three of the internal interrupt sources are non-maskable while the rest are maskable. Interrupt sources are provided with interrupt latches (IL), which hold interrupt requests, and have independent vector addresses. When a request for an interrupt is generated, its interrupt latch is set to "1", which requests the CPU to accept the interrupt. Acceptance of interrupts is enabled or disabled by software using the interrupt master enable flag (IMF) and individual enable flag (EF) for each interrupt source. If multiple maskable interrupts are generated simultaneously, the interrupts are accepted in order of descending priority, as Table 7.1. However, there are no prioritized interrupt sources among non-maskable interrupts.

Interrupt sources		Enable condition	Interrupt latch	Vector Address (MCU mode)		Basic priority
				RVCTR=0 enabled	RVCTR=1 enabled	
Internal/External	(Reset)	Non-maskable	-	0xFFFE	-	1
Internal	INTSW1	Non-maskable	-	0xFFFC	0x01FC	2
Internal	INTUNDEF	Non-maskable	-	0xFFFC	0x01FC	2
Internal	INTWDT	Non-maskable	ILL<IL3>	0xFFF8	0x01F8	2
Internal	INTWUC	IMF AND EIRL<EF4> = 1	ILL<IL4>	0xFFF6	0x01F6	5
Internal	INTTBT	IMF AND EIRL<EF5> = 1	ILL<IL5>	0xFFF4	0x01F4	6
Internal	INTRXD0 / INTSIO0	IMF AND EIRL<EF6> = 1	ILL<IL6>	0xFFF2	0x01F2	7
Internal	INTTXD0	IMF AND EIRL<EF7> = 1	ILL<IL7>	0xFFF0	0x01F0	8
External	$\overline{\text{INT5}}$	IMF AND EIRH<EF8> = 1	ILH<IL8>	0xFFE8	0x01E8	9
Internal	INTVLTD	IMF AND EIRH<EF9> = 1	ILH<IL9>	0xFFE6	0x01E6	10
Internal	INTADC	IMF AND EIRH<EF10> = 1	ILH<IL10>	0xFFE4	0x01E4	11
Internal	INTRTC	IMF AND EIRH<EF11> = 1	ILH<IL11>	0xFFE2	0x01E2	12
Internal	INTTC00	IMF AND EIRH<EF12> = 1	ILH<IL12>	0xFFE0	0x01E0	13
Internal	INTTC01	IMF AND EIRH<EF13> = 1	ILH<IL13>	0xFFD8	0x01D8	14
Internal	INTTCA0	IMF AND EIRH<EF14> = 1	ILH<IL14>	0xFFD6	0x01D6	15
Internal	INTSBIO / INTSIO0	IMF AND EIRH<EF15> = 1	ILH<IL15>	0xFFD4	0x01D4	16
External	INT0	IMF AND EIRE<EF16> = 1	ILE<IL16>	0xFFD2	0x01D2	17
External	INT1	IMF AND EIRE<EF17> = 1	ILE<IL17>	0xFFD0	0x01D0	18
External	INT2	IMF AND EIRE<EF18> = 1	ILE<IL18>	0xFFD8	0x01D8	19
External	INT3	IMF AND EIRE<EF19> = 1	ILE<IL19>	0xFFD6	0x01D6	20
External	INT4	IMF AND EIRE<EF20> = 1	ILE<IL20>	0xFFD4	0x01D4	21
Internal	INTTCA1	IMF AND EIRE<EF21> = 1	ILE<IL21>	0xFFD2	0x01D2	22
Internal	INTRXD1	IMF AND EIRE<EF22> = 1	ILE<IL22>	0xFFD0	0x01D0	23
Internal	INTTXD1	IMF AND EIRE<EF23> = 1	ILE<IL23>	0xFFD8	0x01D8	24
Internal	INTTC02	IMF AND EIRD<EF24> = 1	ILD<IL24>	0xFFD6	0x01D6	25
Internal	INTTC03	IMF AND EIRD<EF25> = 1	ILD<IL25>	0xFFD4	0x01D4	26
Internal	INTRXD2	IMF AND EIRD<EF26> = 1	ILD<IL26>	0xFFD2	0x01D2	27
Internal	INTTXD2	IMF AND EIRD<EF27> = 1	ILD<IL27>	0xFFD0	0x01D0	28
Internal	INTEMG0	IMF AND EIRD<EF28> = 1	ILD<IL28>	0xFFD8	0x01D8	29
Internal	INTTCC0P	IMF AND EIRD<EF29> = 1	ILD<IL29>	0xFFD6	0x01D6	20
Internal	INTTCC0T	IMF AND EIRD<EF30> = 1	ILD<IL30>	0xFFD4	0x01D4	31

Table 7.1 Interrupt Information Table

Note 1): To use the watchdog timer interrupt (INTWDT), clear WDTCR1<WDTOUT> to "0" (It is set for the "Reset request" after reset is released). For details, see "10.1 Watchdog Timer".

Note 2): Vector address areas can be changed by the SYSCR3<RVCTR> setting. To assign vector address areas to RAM, set SYSCR3<RVCTR> to "1", and also set SYSCR3<RAREA> to "1".

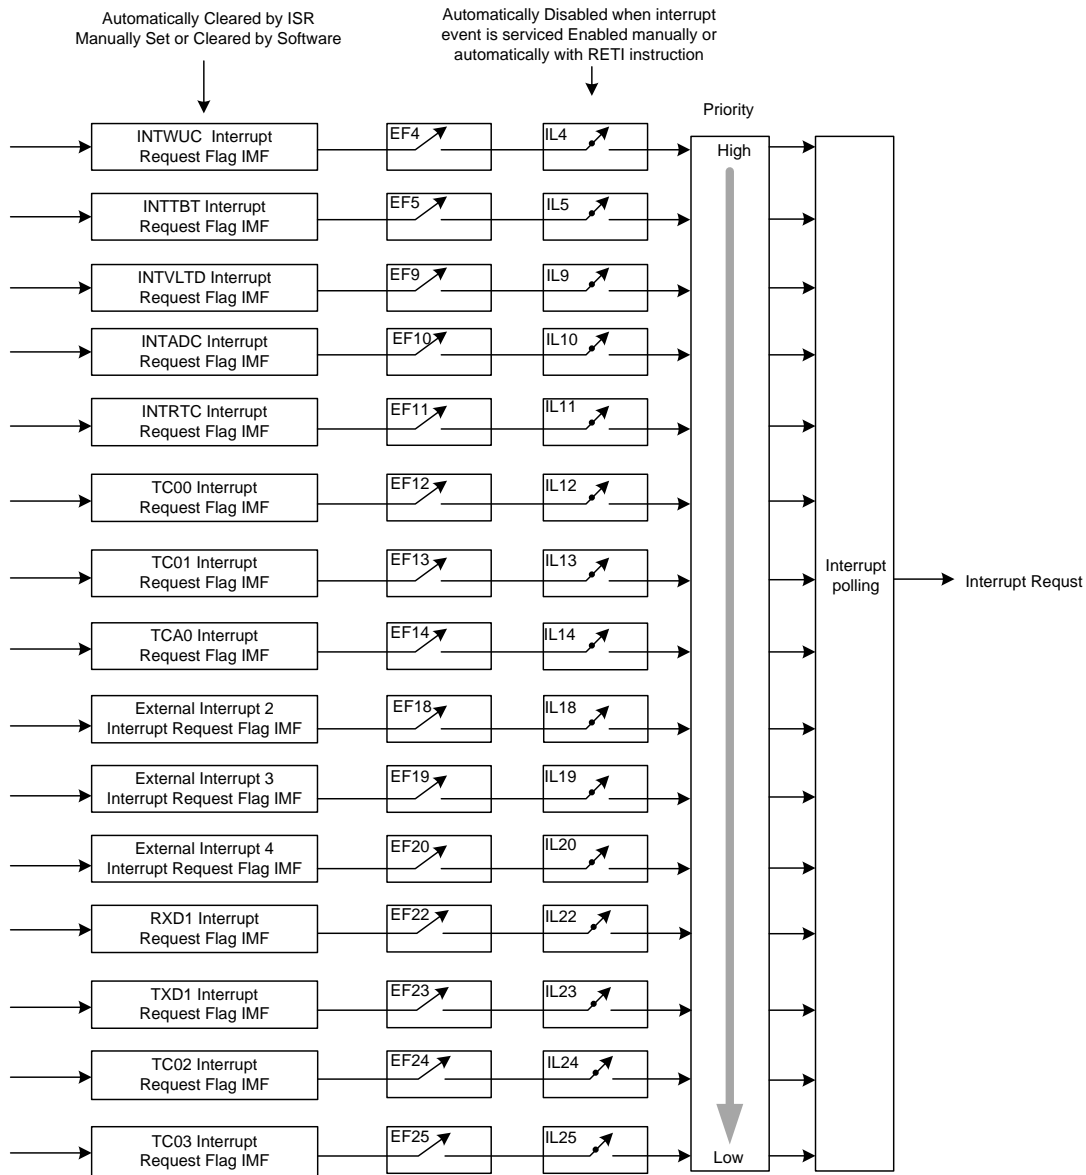


Figure 7.1 Interrupts Control Scheme

## 7.1 Interrupts Latches (IL25 to IL3)

An interrupt latch is provided for each interrupt source, except for a software interrupt and an undefined instruction execution interrupt. When an interrupt request is generated, the latch is set to "1", and then the CPU is requested to accept the interrupt if its acceptance is enabled. The interrupt latch is cleared to "0" immediately after the interrupt is accepted. All interrupt latches are initialized to "0" during reset.

The interrupt latches are located at addresses 0x0FE0, 0x0FE1, 0x0FE2 and 0xFE3 in SFR area. Each latch can be cleared to "0" individually by an instruction. However, IL3 interrupt latches cannot be cleared by instructions.

Do not use any read-modify-write instruction, such as a bit manipulation or operation instruction, because it may clear interrupt requests generated while the instruction is executed.

Interrupt latches cannot be set to "1" by using an instruction. Writing "1" to an interrupt latch is equivalent to deny clearing of the interrupt latch, and not setting the interrupt latch.

Since interrupt latches can be read by instructions, the status of interrupt requests can be monitored by software.

*Note): In the main program, before manipulating an interrupt latch (IL), be sure to clear the master enable flag (IMF) to "0" (Disable interrupt by DI instruction). Then set the IMF to "1" as required after operating the IL (Enable interrupt by EI instruction).*

*In the interrupt service routine, the IMF becomes "0" automatically and need not be cleared to "0" normally. However, if using multiple interrupt in the interrupt service routine, manipulate the IL before setting the IMF to "1".*

## 7.2 Interrupt Enable Register (EIR)

The interrupt enable register (EIR) enables and disables the acceptance of interrupts, except for the non-maskable interrupts (software interrupt, undefined instruction interrupt and watchdog interrupt). Non-maskable interrupts are accepted regardless of the contents of the EIR.

The EIR consists of the interrupt master enable flag (IMF) and the individual interrupt enable flags (EF). These registers are located at addresses 0x003A, 0x003B, 0x003C and 0x003D in the SFR area, and they can be read and written by instructions (including read-modify-write instructions such as bit manipulation or operation instructions).

## 7.3 Interrupt Master Enable Flag (IMF)

The interrupt master enable flag (IMF) enables and disables the acceptance of all maskable interrupts. Clearing the IMF to "0" disables the acceptance of all maskable interrupts. Setting the IMF to "1" enables the acceptance of the interrupts that are specified by the individual interrupt enable flags.

When an interrupt is accepted, the IMF is stacked and then cleared to "0", which temporarily disables the subsequent maskable interrupts. After the interrupt service routine is executed, the stacked data, which was the status before interrupt acceptance, reloads on the IMF by return interrupt instruction [RETI] / [RETN].

The IMF is located on bit 0 in EIRL (Address: 0x003A in SFR), and can be read and written by instructions. The IMF is normally set and cleared by [EI] and [DI] instructions respectively. During reset, the IMF is

initialized to "0".

## 7.4 Individual Interrupt Enable Flag (EF30 to EF4)

Each of these flags enables and disables the acceptance of its maskable interrupt. Setting the corresponding bit of an individual interrupt enable flag to "1" enables acceptance of its interrupt, and setting the bit to "0" disables acceptance.

During reset, all the individual interrupt enable flags are initialized to "0" and no maskable interrupts are accepted until the flags are set to "1".

*Note): In the main program, before manipulating the interrupt enable flag (EF), be sure to clear the master enable flag (IMF) to "0" (Disable interrupt by DI instruction). Then set the IMF to "1" as required after operating the EF (Enable interrupt by EI instruction).*

*In the interrupt service routine, the IMF becomes "0" automatically and need not be cleared to "0" normally. However, if using multiple interrupt in the interrupt service routine, manipulate the EF before setting the IMF to "1".*

### Interrupt Latch (ILL)

ILL (0x0FE0)	7	6	5	4	3	2	1	0
Bit Symbol	IL7	IL6	IL5	IL4	IL3	-	-	-
Read/Write	R/W	R/W	R/W	R/W	R	R	R	R
After reset	0	0	0	0	0	0	0	0
Function	INTTXD0	INTRXD0 /INTSIO0	INTTBT	INTWUC	INTWDT	-	-	-

### Interrupt Latch (ILH)

ILH (0x0FE1)	7	6	5	4	3	2	1	0
Bit Symbol	IL15	IL14	IL13	IL12	IL11	IL10	IL9	IL8
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0
Function	INTSBIO /INTSIO0	INTTCA0	INTTC01	INTTC00	INTRTC	INTADC	INTLVD	INT5

### Interrupt Latch (ILE)

ILE (0x0FE2)	7	6	5	4	3	2	1	0
Bit Symbol	IL23	IL22	IL21	IL20	IL19	IL18	IL17	IL16
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0
Function	INTTXD1	INTRXD1	INTTCA1	INT4	INT3	INT2	INT1	INT0

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

### Interrupt Latch (ILD)

ILD (0x0FE3)	7	6	5	4	3	2	1	0
Bit Symbol	-	IL30	IL29	IL28	IL27	IL26	IL25	IL24
Read/Write	R	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0
Function	-	INTTCC0T	INTTCC0P	INTEMG0	INTTXD2	INTRXD2	INTTC03	INTTC02

IL30 to IL4	Interrupt latch	Read		Write	
		0	No interrupt request	Clear the interrupt request (Notes 2 and 3)	
		1	Interrupt request	Does not clear the interrupt request (Interrupt is not set by writing "1")	
IL3		0	No interrupt request		
		1	Interrupt request	-	

Note 1): IL3 is a read-only register. Writing the register does not affect interrupt latch.

Note 2): In the main program, before manipulating an interrupt latch (IL), be sure to clear the interrupt master enable flag (IMF) to "0" (Disable interrupt by DI instruction). Then set the IMF to "1" as required after operating the IL (Enable interrupt by EI instruction).

In the interrupt service routine, the IMF becomes "0" automatically and need not be cleared to "0" normally. However, if using multiple interrupt in the interrupt service routine, manipulate the IL before setting the IMF to "1".

Note 3): Do not clear IL with read-modify-write instructions such as bit operations.

Note 4): When a read instruction is executed on ILL, bits 0 to 2 are read as "0". Other unused bits are read as "0".

### Interrupt Enable Register (EIRL)

EIRL (0x003A)	7	6	5	4	3	2	1	0
Bit Symbol	EF7	EF6	EF5	EF4	-	-	-	IMF
Read/Write	R/W	R/W	R/W	R/W	R	R	R	R/W
After reset	0	0	0	0	0	0	0	0
Function	INTTXD0	INTRXD0 / INTSIO0	INTTBT	INTWUC	-	-	-	IMF

### Interrupt Enable Register (EIRH)

EIRH (0x003B)	7	6	5	4	3	2	1	0
Bit Symbol	EF15	EF14	EF13	EF12	EF11	EF10	EF9	EF8
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0
Function	INTSBIO / INTSIO0	INTTCA0	INTTC01	INTTC00	INTRTC	INTADC	INTLVD	INT5

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

#### Interrupt Enable Register (EIRE)

EIRE (0x003C)	7	6	5	4	3	2	1	0
Bit Symbol	EF23	EF22	EF21	EF20	EF19	EF18	EF17	EF16
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0
Function	INTTXD1	INTRXD1	INTTCA1	INT4	INT3	INT2	INT1	INT0

#### Interrupt Enable Register (EIRD)

EIRD (0x003D)	7	6	5	4	3	2	1	0
Bit Symbol	-	EF30	EF29	EF28	EF27	EF26	EF25	EF24
Read/Write	R	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0
Function	-	INTTCC0T	INTTCC0P	INTEMG0	INTTXD2	INTRXD2	INTTC03	INTTC02

EF30 to EF4	Individual Interrupt Enable Flag (specified for each bit)	0 1	Disable the acceptance of each maskable interrupt Enable the acceptance of each maskable interrupt
IMF	Interrupt Master Enable Flag	0 1	Disable the acceptance of all maskable interrupts Enable the acceptance of all maskable interrupts

Note 1): Do not set the IMF and the interrupt enable flag (EF15 to EF4) to "1" at the same time.

Note 2): In the main program, before manipulating the interrupt enable flag (EF), be sure to clear the master enable flag (IMF) to "0" (Disable interrupt by DI instruction). Then set the IMF to "1" as required after operating the EF (Enable interrupt by EI instruction). In the interrupt service routine, the IMF becomes "0" automatically and need not be cleared to "0" normally. However, if using multiple interrupt in the interrupt service routine, manipulate the EF before setting the IMF to "1".

Note 3): When a read instruction is executed on EIRL, bits 3 to 1 are read as "0". Other unused bits are read as "0".

## 7.5 Using a register bank to save/restore general-purpose registers

In non-multiple interrupt handling, the register bank function can be used to save/restore the general-purpose registers at a time. The register bank function saves (switches) the general-purpose registers by executing a register bank manipulation instruction (such as LD RBS, 1) at the beginning of an interrupt service task. It is unnecessary to re-execute the register bank manipulation instruction at the end of the interrupt service task because executing the RETI instruction makes a return automatically to the register bank that was being used by the main task according to the content of the PSW.

Note: Two register banks (BANK0 and BANK1) are available. Each bank consists of 8-bit general-purpose registers (W, A, B, C, D, E, H, and L) and 16-bit general-purpose registers (IX and IY).

Example : Saving/restoring registers, using an instruction for transfer with data memory (with the main task using the register bank BANK0)

```

PINTxx:  LD          RBS, 1          ; Switches to the register bank BANK1
          Interrupt processing
          RETI                       ; RETURN
                                          (Makes a return automatically to BANK0
                                          that was being used by the main task when
                                          the PSW is restored)
    
```

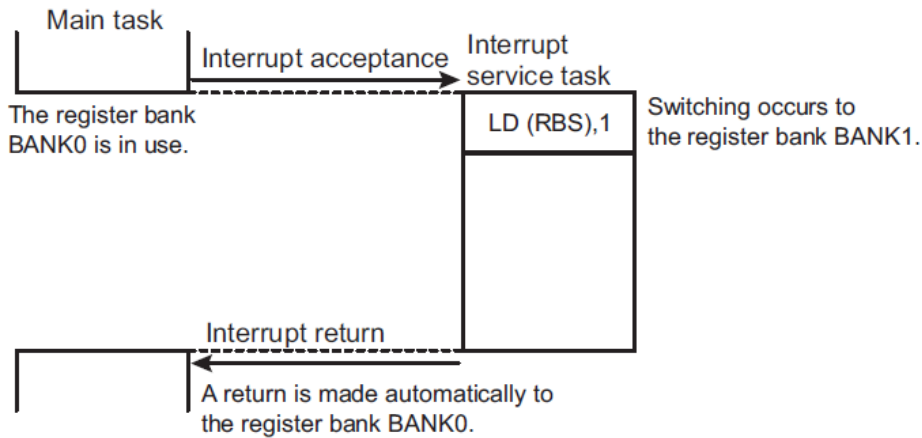


Figure 7.2 Saving/Restoring General-purpose Registers under Interrupt Processing

## 7.6 External Interrupt Control Circuit

External interrupts detects the change of the input signal and generates an interrupt request. Noise can be removed by the built-in digital noise canceller.

### 7.6.1 Configuration

The external interrupt control circuit consists of a noise canceller, an edge detection circuit, a level detection circuit and an interrupt signal generation circuit.

Externally input signals are input to the rising edge or falling edge or level detection circuit for each external interrupt, after noise is removed by the noise canceller.

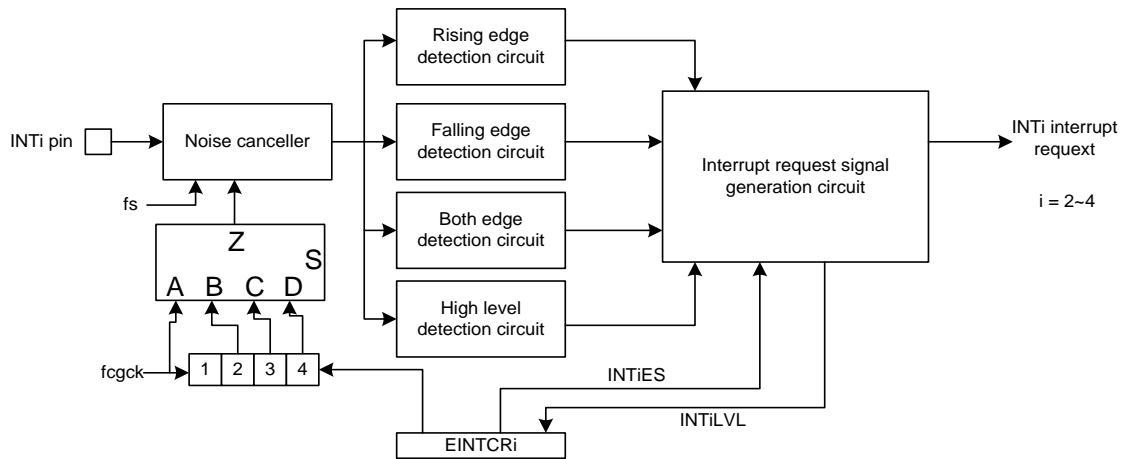


Figure7.3 External Interrupts 2/3/4

### 7.6.2 Control

External interrupts are controlled by the following registers:

#### Low Power Consumption Register 3

POFFCR3 (0x0F77)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	INT5EN	INT4EN	INT3EN	INT2EN	INT1EN	INT0EN
Read/Write	R	R	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

<b>INT5EN</b>	INT5 Control	0 1	Disable Enable
<b>INT4EN</b>	INT4 Control	0 1	Disable Enable
<b>INT3EN</b>	INT3 Control	0 1	Disable Enable
<b>INT2EN</b>	INT2 Control	0 1	Disable Enable
<b>INT1EN</b>	INT1 Control	0 1	Disable Enable
<b>INT0EN</b>	INT0 Control	0 1	Disable Enable

Note 1): Clearing INTxEN (x=0 to 5) to "0" stops the clock supply to the external interrupts. This invalidates the data written in the control register for each external interrupt. When using the external interrupts, set INTxEN to "1" and then write data into the control register for each external interrupt.

Note 2): Interrupt request signals may be generated when INTxEN is changed. Before changing INTxEN, clear the corresponding interrupt enable register to "0" to disable the generation of interrupt. When the operation mode is changed from NORMAL1/2 or IDLE1/2 to SLOW1/2 or SLEEP1, wait 12/fs [s] after the operation mode is changed and clear the interrupt latch. And when the operation mode is changed from SLOW1/2 or SLEEP1 to NORMAL1/2 or IDLE1/2, wait 2/fcgck+3/fspi [s]

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

after the operation mode is changed and clear the interrupt latch.

Note 3): Bits 7 and 6 of POFFSET3 are read as "0".

### External Interrupt Control Register 1

EINTCR1 (0x0FD8)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	INT1LVL	INT1ES		INT1NC	
Read/Write	R	R	R	R	R/W		R/W	
After reset	0	0	0	0	0		0	

<b>INT1LVL</b>	Signal level that passes noise canceller when the interrupt request signal is generated for external interrupt 1	0: Initial state or signal level "L" 1: Signal level "H"	
<b>INT1ES</b>	Select the interrupt request generating condition for external interrupt 1	00: An interrupt request is generated at the rising edge of the noise canceller pass signal 01: An interrupt request is generated at the falling edge of the noise canceller pass signal 10: An interrupt request is generated at both edges of the noise canceller pass signal 11: Reserved	
<b>INT1NC</b>	Set the noise canceller sampling interval for external interrupt 1	NORMAL 1/2, IDLE 1/2	
		SLOW 1/2, SLEEP1	
		00: fcgck [Hz] 01: fcgck / 2 <sup>2</sup> [Hz] 10: fcgck / 2 <sup>3</sup> [Hz] 11: fcgck / 2 <sup>4</sup> [Hz]	00: fs/4 [Hz] 01: fs/4 [Hz] 10: fs/4 [Hz] 11: fs/4 [Hz]

Note 1): fcgck: Gear clock [Hz], fs: Low-frequency clock [Hz]

Note 2): Interrupt requests may be generated during transition of the operation mode. Before changing the operation mode, clear the corresponding interrupt enable register to "0" to disable the generation of interrupt. When the operation mode is changed from NORMAL 1/2 or IDLE 1/2 to SLOW 1/2 or SLEEP1, wait 12/fs [s] after the operation mode is changed and clear the interrupt latch. And when the operation mode is changed from SLOW 1/2 or SLEEP1 to NORMAL 1/2 or IDLE 1/2, wait 2/fcgck+3/fspl [s] after the operation mode is changed and clear the interrupt latch.

Note 3): Interrupt requests may be generated when EINTCRx(x = 1~4) is changed. Before doing such operation, clear the corresponding interrupt enable register to "0" to disable the generation of interrupt. When the operation mode is changed from NORMAL 1/2 or IDLE 1/2 to SLOW 1/2 or SLEEP1, wait 12/fs [s] after the operation mode is changed and clear the interrupt latch. And when the operation mode is changed from SLOW 1/2 or SLEEP1 to NORMAL 1/2 or IDLE 1/2, wait 2/fcgck+3/fspl [s] after the operation mode is changed and clear the interrupt latch.

Note 4): The contents of EINTCRx <INTxLVL> are updated each time an interrupt request signal is generated.

Note 5): Bits 7 to 5 of EINTCR1 are read as "0".

### External Interrupt Control Register 2

EINTCR2 (0x0FD9)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	INT2LVL	INT2ES		INT2NC	
Read/Write	R	R	R	R	R/W		R/W	
After reset	0	0	0	0	0		0	

<b>INT2LVL</b>	Noise canceller pass signal level when the interrupt request signal is generated for external interrupt 2	0: Initial state or signal level "L" 1: Signal level "H"	
<b>INT2ES</b>	Select the interrupt request generating condition for external interrupt 2	00: An interrupt request is generated at the rising edge of the noise canceller pass signal 01: An interrupt request is generated at the falling edge of the noise canceller pass signal 10: An interrupt request is generated at both edges of the noise canceller pass signal 11: Reserved	
<b>INT2NC</b>	Set the noise canceller sampling interval for external interrupt 1	NORMAL 1/2, IDLE 1/2	SLOW 1/2, SLEEP1
		00: fcgck [Hz] 01: fcgck / 2 <sup>2</sup> [Hz] 10: fcgck / 2 <sup>3</sup> [Hz] 11: fcgck / 2 <sup>4</sup> [Hz]	00: fs/4 [Hz] 01: fs/4 [Hz] 10: fs/4 [Hz] 11: fs/4 [Hz]

Note 1: fcgck: Gear clock [Hz], fs: Low-frequency clock [Hz]

Note 2: Interrupt requests may be generated during transition of the operation mode. Before changing the operation mode, clear the corresponding interrupt enable register to "0" to disable the generation of interrupt. When the operation mode is changed from NORMAL 1/2 or IDLE 1/2 to SLOW 1/2 or SLEEP1, wait 12/fs [s] after the operation mode is changed and clear the interrupt latch. And when the operation mode is changed from SLOW 1/2 or SLEEP1 to NORMAL 1/2 or IDLE 1/2, wait 2/fcgck+3/fspl [s] after the operation mode is changed and clear the interrupt latch.

Note 3: Interrupt requests may be generated when EINTCR2 is changed. Before doing such operation, clear the corresponding interrupt enable register to "0" to disable the generation of interrupt. When the operation mode is changed from NORMAL 1/2 or IDLE 1/2 to SLOW 1/2 or SLEEP1, wait 12/fs [s] after the operation mode is changed and clear the interrupt latch. And when the operation mode is changed from SLOW 1/2 or SLEEP1 to NORMAL 1/2 or IDLE 1/2, wait 2/fcgck+3/fspl [s] after the operation mode is changed and clear the interrupt latch.

Note 4: Bits 7 to 5 of EINTCR2 are read as "0".

### External Interrupt Control Register 3

EINTCR3 (0x0FDA)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	INT3LVL	INT3ES		INT3NC	
Read/Write	R	R	R	R	R/W		R/W	
After reset	0	0	0	0	0		0	

<b>INT3LVL</b>	Noise canceller pass signal level when the interrupt request signal is generated for external interrupt 3	0: Initial state or signal level "L" 1: Signal level "H"	
<b>INT3ES</b>	Select the interrupt request generating condition for external interrupt 3	00: An interrupt request is generated at the rising edge of the noise canceller pass signal  01: An interrupt request is generated at the falling edge of the noise canceller pass signal  10: An interrupt request is generated at both edges of the noise canceller pass signal  11: Reserved	
<b>INT3NC</b>	Set the noise canceller sampling interval for external interrupt 3	NORMAL 1/2, IDLE 1/2	SLOW 1/2, SLEEP1
		00: fcgck [Hz] 01: fcgck / 2 <sup>2</sup> [Hz] 10: fcgck / 2 <sup>3</sup> [Hz] 11: fcgck / 2 <sup>4</sup> [Hz]	00: fs/4 [Hz] 01: fs/4 [Hz] 10: fs/4 [Hz] 11: fs/4 [Hz]

Note 1: fcgck: Gear clock [Hz], fs: Low-frequency clock [Hz]

Note 2: Interrupt requests may be generated during transition of the operation mode. Before changing the operation mode, clear the corresponding interrupt enable register to "0" to disable the generation of interrupt. When the operation mode is changed from NORMAL 1/2 or IDLE 1/2 to SLOW 1/2 or SLEEP1, wait 12/fs [s] after the operation mode is changed and clear the interrupt latch. And when the operation mode is changed from SLOW 1/2 or SLEEP1 to NORMAL 1/2 or IDLE 1/2, wait 2/fcgck+3/fspl [s] after the operation mode is changed and clear the interrupt latch.

Note 3: Interrupt requests may be generated when EINTCR3 is changed. Before doing such operation, clear the corresponding interrupt enable register to "0" to disable the generation of interrupt. When the operation mode is changed from NORMAL 1/2 or IDLE 1/2 to SLOW 1/2 or SLEEP1, wait 12/fs [s] after the operation mode is changed and clear the interrupt latch. And when the operation mode is changed from SLOW 1/2 or SLEEP1 to NORMAL 1/2 or IDLE 1/2, wait 2/fcgck+3/fspl [s] after the operation mode is changed and clear the interrupt latch.

Note 4: Bits 7 to 5 of EINTCR3 are read as "0".

#### External Interrupt Control Register 4

<b>EINTCR4 (0x0FDB)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	-	-	-	INT4LVL	INT4ES		INT4NC	
Read/Write	R	R	R	R	R/W		R/W	
After reset	0	0	0	0	0		0	

<b>INT4LVL</b>	Noise canceller pass signal level when the interrupt request signal is generated for external interrupt 4	0: Initial state or signal level "L" 1: Signal level "H"	
<b>INT4ES</b>	Select the interrupt request generating condition for external interrupt 4	00: An interrupt request is generated at the rising edge of the noise canceller pass signal  01: An interrupt request is generated at the falling edge of the noise canceller pass signal  10: An interrupt request is generated at both edges of the noise canceller pass signal  11: Reserved	

INT4NC	Set the noise canceller sampling interval for external interrupt 4	NORMAL 1/2, IDLE 1/2	SLOW 1/2, SLEEP1
		00: fcgck [Hz] 01: fcgck / 2 <sup>2</sup> [Hz] 10: fcgck / 2 <sup>3</sup> [Hz] 11: fcgck / 2 <sup>4</sup> [Hz]	00: fs/4 [Hz] 01: fs/4 [Hz] 10: fs/4 [Hz] 11: fs/4 [Hz]

Note 1: fcgck: Gear clock [Hz], fs: Low-frequency clock [Hz]

Note 2: Interrupt requests may be generated during transition of the operation mode. Before changing the operation mode, clear the corresponding interrupt enable register to "0" to disable the generation of interrupt. When the operation mode is changed from NORMAL 1/2 or IDLE 1/2 to SLOW 1/2 or SLEEP1, wait 12/fs [s] after the operation mode is changed and clear the interrupt latch. And when the operation mode is changed from SLOW 1/2 or SLEEP1 to NORMAL 1/2 or IDLE 1/2, wait 2/fcgck+3/fspl [s] after the operation mode is changed and clear the interrupt latch.

Note 3: Interrupt requests may be generated when EINTCR4 is changed. Before doing such operation, clear the corresponding interrupt enable register to "0" to disable the generation of interrupt. When the operation mode is changed from NORMAL 1/2 or IDLE 1/2 to SLOW 1/2 or SLEEP1, wait 12/fs [s] after the operation mode is changed and clear the interrupt latch. And when the operation mode is changed from SLOW 1/2 or SLEEP1 to NORMAL 1/2 or IDLE 1/2, wait 2/fcgck+3/fspl [s] after the operation mode is changed and clear the interrupt latch.

Note 4: The contents of EINTCRx<INTxLVL> are updated each time an interrupt request signal is generated.

Note 5: Bits 7 to 5 of EINTCR4 are read as "0".

### 7.6.3 Function

The condition for generating interrupt request signals and the noise cancel time can be set for external interrupts 2 to 4.

Source	Pin	Enable Conditions	Interrupt request signal generated	External interrupt pin input signal width and noise removal	
				NORMAL 1/2, IDLE 1/2	SLOW 1/2, SLEEP 1
INT0	INT0B	IMF=1 EF16=1	Falling edge	Less than 1/fcgck: Noise More than 1/fcgck and less than 2/fcgck: Indeterminate More than 2/fcgck: Signal	Less than 4/fs: Noise More than 4/fs and less than 8/fs: Indeterminate More than 8/fs: Signal
INT1	INT1	IMF=1 EF17=1	Falling edge Rising edge Both edges	Less than 2/fspl: Noise More than 2/fspl and less than 3/fspl+1/fcgck: Indeterminate More than 3/fspl+1/fcgck: Signal	Less than 4/fs: Noise More than 4/fs and less than 8/fs: Indeterminate More than 8/fs: Signal
INT2	INT2	IMF=1 EF18=1	Falling edge Rising edge Both edges	Less than 2/fspl: Noise More than 2/fspl and less than 3/fspl+1/fcgck: Indeterminate More than 3/fspl+1/fcgck: Signal	Less than 4/fs: Noise More than 4/fs and less than 8/fs: Indeterminate More than 8/fs: Signal
INT3	INT3	IMF=1 EF19=1	Falling edge Rising edge Both edges	Less than 2/fspl: Noise More than 2/fspl and less than 3/fspl+1/fcgck: Indeterminate More than 3/fspl+1/fcgck: Signal	Less than 4/fs: Noise More than 4/fs and less than 8/fs: Indeterminate More than 8/fs: Signal

Source	Pin	Enable Conditions	Interrupt request signal generated	External interrupt pin input signal width and noise removal	
				NORMAL 1/2, IDLE 1/2	SLOW 1/2, SLEEP 1
INT4	INT4	IMF=1 EF20=1	Falling edge Rising edge Both edges "H" level	Less than $2/fspl$ : Noise	Less than $4/fs$ : Noise
				More than $2/fspl$ and less than $3/fspl+1/fcgck$ : Indeterminate	More than $4/fs$ and less than $8/fs$ : Indeterminate
				More than $3/fspl+1/fcgck$ : Signal	More than $8/fs$ : Signal
INT5	INT5B	IMF=1 EF8=1	Falling edge	Less than $1/fcgck$ : Noise	Less than $4/fs$ : Noise
				More than $1/fcgck$ and less than $2/fcgck$ : Indeterminate	More than $4/fs$ and less than $8/fs$ : Indeterminate
				More than $2/fcgck$ : Signal	More than $8/fs$ : Signal

Table 7.2 External Interrupts

Note): *fcgck*: Gear clock [Hz]; *fs*: Low frequency clock [Hz]; *fspl*: Sampling interval [Hz]

### 7.5.3.1 Low Power Consumption Function

External interrupts have a function that saves power by using the low power consumption register (POFFCR3) when they are not used. Setting POFFCR3<INTxEN> to "0" stops (disables) the basic clock for external interrupts and helps save power. Note that this makes external interrupts unavailable. Setting POFFCR3<INTxEN> to "1" supplies (enables) the basic clock for external interrupts and makes external interrupts available.

After reset, POFFCR3<INTxEN> is initialized to "0" and external interrupts become unavailable. When using the external interrupt function for the first time, be sure to set POFFCR3<INTxEN> to "1" in the initial setting of software (before operating the external interrupt control registers).

Note): Interrupt request signals may be generated when INTxEN is changed. Before changing INTxEN, clear the corresponding interrupt enable register to "0" to disable the generation of interrupt. When the operation mode is changed from NORMAL1/2 or IDLE1/2 to SLOW1/2 or SLEEP1, wait  $12/fs$  [s] after the operation mode is changed and clear the interrupt latch. And when the operation mode is changed from SLOW1/2 or SLEEP1 to NORMAL1/2 or IDLE1/2, wait  $2/fcgck+3/fspl$  [s] after the operation mode is changed and clear the interrupt latch.

### 7.5.3.2 External Interrupt 0 to 5

#### External interrupt 0

External interrupt 0 detects the falling edge of the INT0 pin and generates interrupt request signals. In NORMAL1/2 or IDLE1/2 mode, pulses of less than  $1/fcgck$  are removed as noise and pulses of  $2/fcgck$  or more are recognized as signals.

In SLOW/SLEEP mode, pulses of less than  $4/fs$  are removed as noise and pulses of  $8/fs$  or more are recognized as signals.

#### External interrupt 1/2/3

External interrupt 1/2/3 detects the falling edge, the rising edge, both edges or "H" level of the INTx pin and generates interrupt request signals.


**(a) Interrupt Request Signal Generating Condition Detection Function**

Select an interrupt request signal generating condition at EINTCRx<INTxES> for external interrupt 1/2/3.

EINTCRx<INTxES>	Detected at
00	Rising edge
01	Falling edge
10	Both edges
11	"H" level interrupt

**Table 7.3 Selection of Interrupt Request Generation Edge**

**(b) A Noise Canceller Pass Signal Monitoring Function when Interrupt Request Signals Generated**

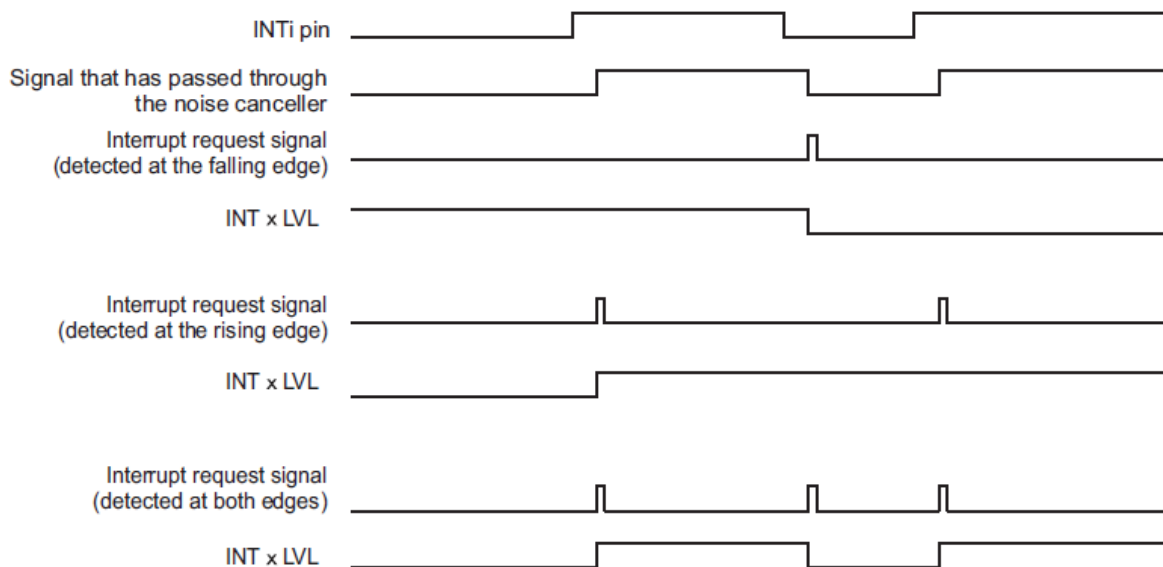

Note: The contents of EINTCRx<INTxLVL> are updated each time an interrupt request signal is generated.

**Figure 7.4 Interrupt Request Generation and EINTCRx<INTxLVL> (x = 1 to 3)**

The level of a signal that has passed through the noise canceller when an interrupt request is generated can be read by using EINTCRx <INTxLVL>. When both edges are selected as detection edges, the edge where an interrupt is generated can be detected by reading EINTCRx <INTxLVL>.

**(c) Noise Cancel Time Selection Function**

In NORMAL1/2 or IDLE1/2 mode, a signal that has been sampled by fcgck is sampled at the sampling interval selected at EINTCRx<INTxNC>. If the same level is detected three

consecutive times, the signal is recognized as a signal. If not, the signal is removed as noise.

EINTCRx <INTxES>	Sampling Interval
00	fcgck
01	fcgck/2 <sup>2</sup>
10	fcgck/2 <sup>3</sup>
11	fcgck/2 <sup>4</sup>

Table 7.4 Noise Canceller Sampling Clock

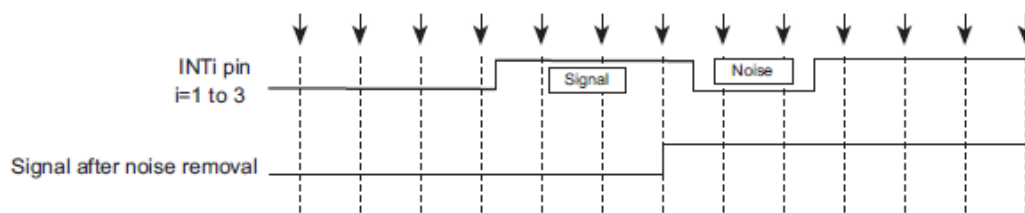


Figure 7.5 Noise Cancel Operation

In SLOW1/2 or SLEEP1 mode, a signal is sampled by the low frequency clock divided by 4. If the same level is detected twice consecutively, the signal is recognized as a signal.

In IDLE0, SLEEP0 or STOP mode, the noise canceller sampling operation is stopped and an external interrupts are unavailable. When operation returns to NORMAL1/2, IDLE1/2, SLOW1/2 or SLEEP1 mode, sampling operation restarts.

*Note 1): When noise is input consecutively during sampling external interrupt pins, the noise cancel function does not work properly. Set EINTCRx <INTxNC> according to the cycle of externally input noise.*

*Note 2): When an external interrupt pin is used as an output port, the input signal to the port is fixed to "L" when the mode is switched to the output mode, and thus an interrupt request occurs. To use the pin as an output port, clear the corresponding interrupt enable register to "0" to disable the generation of interrupt.*

*Note 3): Interrupt requests may be generated during transition of the operation mode. Before changing the operation mode, clear the corresponding interrupt enable register to "0" to disable the generation of interrupt. When the operation mode is changed from NORMAL1/2 or IDLE1/2 to SLOW1/2 or SLEEP1, wait 12/fs [s] after the operation mode is changed and clear the interrupt latch. And when the operation mode is changed from SLOW1/2 or SLEEP1 to NORMAL1/2 or IDLE1/2, wait 2/ fcgck+3/fspl [s] after the operation mode is changed and clear the interrupt latch.*

## External interrupt 4

External interrupt 4 detects the falling edge, the rising edge, both edges or "H" level of the INT4 pin and generates interrupt request signals.


### (a) Interrupt request signal generating condition detection function

Select an interrupt request signal generating condition at EINTCR4<INT4ES> for external interrupt 4.

EINTCR4<INT4ES>	Detected at
00	Rising edge
01	Falling edge
10	Both edges
11	"H" level interrupt

**Table 7.5 Selection of Interrupt Request Generation Edge**

A noise canceller pass signal monitoring function when interrupt request signals are generated. The level of a signal that has passed through the noise canceller when an interrupt request is generated can be read by using EINTCR4<INT4LVL>. When both edges are selected as detection edges, the edge where an interrupt is generated can be detected by reading EINTCR4<INT4LVL>.

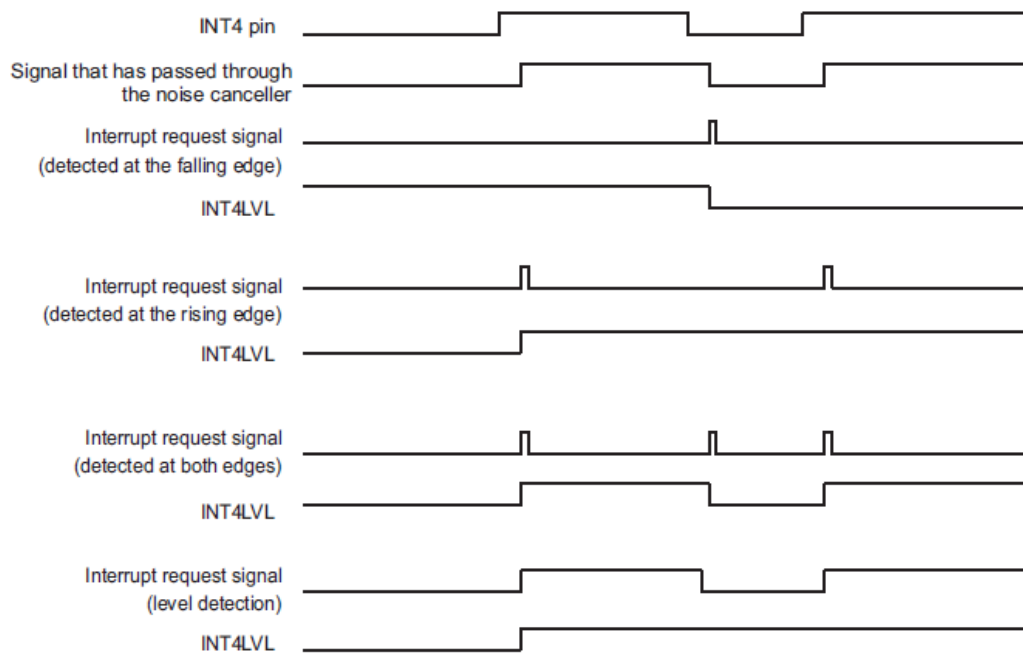

**Figure 7.6 Interrupt Request Generation and EINTCR4<INT4LVL>**

**(b) Noise cancel time selection function**

In NORMAL1/2 or IDLE1/2 mode, a signal that has been sampled by fcgck is sampled at the sampling interval selected at EINTCRx<INT4NC>. If the same level is detected three consecutive times, the signal is recognized as a signal. If not, the signal is removed as noise.

EINTCR4<INT4NC>	Sampling interval
00	fcgck
01	fcgck/2 <sup>2</sup>
10	fcgck/2 <sup>3</sup>
11	fcgck/2 <sup>4</sup>

Table 7.6 Noise Canceller Sampling Lock

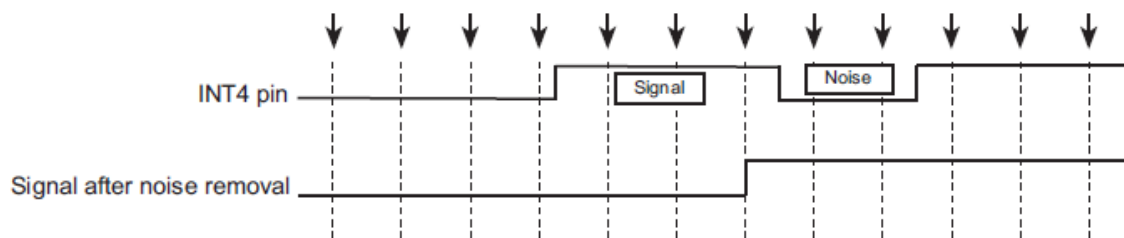


Figure 7.7 Noise Cancel Operation

In SLOW1/2 or SLEEP1 mode, a signal is sampled by the low frequency clock divided by 4. If the same level is detected twice consecutively, the signal is recognized as a signal. In IDLE0, SLEEP0 or STOP mode, the noise canceller sampling operation is stopped and an external interrupts are unavailable. When operation returns to NORMAL1/2, IDLE1/2, SLOW1/2 or SLEEP1 mode, sampling operation restarts.

*Note 1: When noise is input consecutively during sampling external interrupt pins, the noise cancel function does not work properly. Set EINTCRx<INTxNC> according to the cycle of externally input noise.*

*Note 2: When an external interrupt pin is used as an output port, the input signal to the port is fixed to "L" when the mode is switched to the output mode, and thus an interrupt request occurs. To use the pin as an output port, clear the corresponding interrupt enable register to "0" to disable the generation of interrupt.*

*Note 3: Interrupt requests may be generated during transition of the operation mode. Before changing the operation mode, clear the corresponding interrupt enable register to "0" to disable the generation of interrupt. When the operation mode is changed from NORMAL1/2 or IDLE1/2 to SLOW1/2 or SLEEP1, wait  $12/f_s$  [s] after the operation mode is changed and clear the interrupt latch. And when the operation mode is changed from SLOW1/2 or SLEEP1 to NORMAL1/2 or IDLE1/2, wait  $2/f_{cgck} + 3/f_{spl}$  [s] after the operation mode is changed and clear the interrupt latch.*

## External interrupt 5

External interrupt 5 detects the falling edge of the INT5 pin and generates interrupt request signals.

In NORMAL1/2 or IDLE1/2 mode, pulses of less than  $1/f_{cgck}$  are removed as noise and pulses of  $2/f_{cgck}$  or more are recognized as signals.

In SLOW/SLEEP mode, pulses of less than  $4/f_s$  are removed as noise and pulses of  $8/f_s$  or more are recognized as signals.

## 8. I/O Ports

MQ6905 has 8 parallel input / output ports (40 I/O pins) as follows:

Port Name	Pin Name	No. of Pins	Input/output	Secondary Functions
Port P0	P03 to P00	4	Input / Output	Also used as the high-frequency oscillator connection pin and the low-frequency oscillator connection pin
Port P1	P13 to P10	4	Input / Output	Also used as the external reset input, the external interrupt input and the STOP mode release signal input
Port P2	P27 to P20	8	Input / Output	Also used as the UART input/output, the serial interface input/output and the serial bus interface input/output
Port P4	P47 to P40	8	Input / Output	Also used as the timer counter input/output, the analog input and the key-on wakeup input
Port P7	P77 to P70	8	Input / Output	Also used as the timer counter input/output and the external interrupt input
Port P8	P81 to P80	2	Input / Output	Also used as the timer counter input/output
Port P9	P91 to P90	2	Input / Output	Also used as the UART input/output
Port PB	PB7 to PB4	4	Input / Output	Also used as the UART input/output and the serial interface input/output

Table 8.1 List of I/O Ports

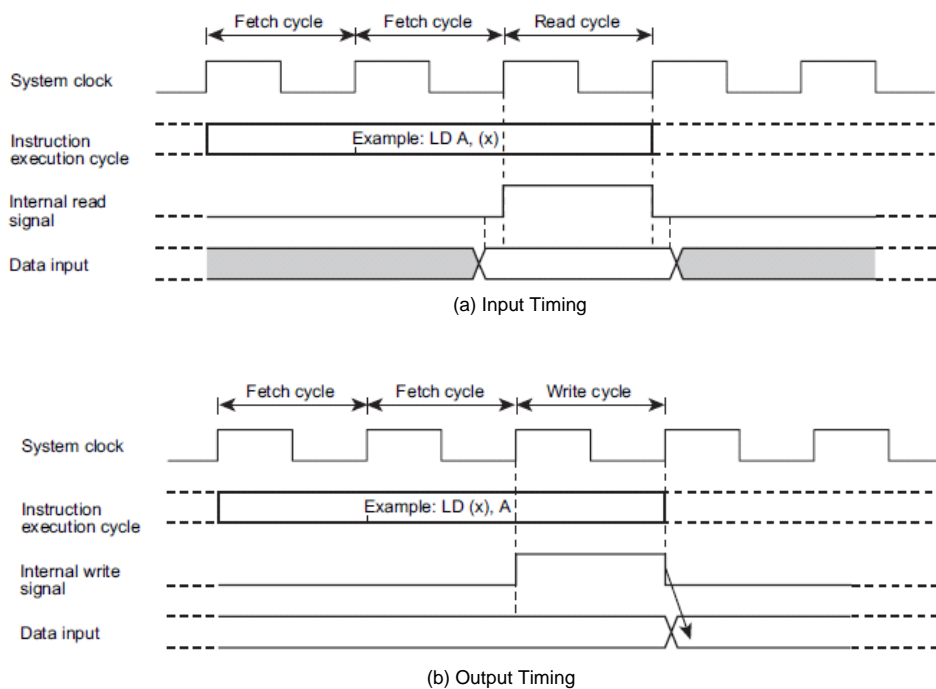


Figure 8.1 Input / Output Timing (Example)

Each output port contains a latch, which holds the output data. No input port has a latch, so the external input data should be externally held until the input data is read from outside or reading should be performed several times before processing. Figure 8.1 shows input / output timing examples.

External data is read from an I/O port in the read cycle during execution of the read instruction. This timing cannot be recognized from outside, so that transient input such as chattering must be processed by the program. Data is output to an I/O port in the next cycle of the write cycle during execution of the write instruction.

## 8.1 I/O Port Control Registers

The following control registers are used for I/O ports. (The port number is indicated in place of x.) Registers that can be set vary depending on the port. For details, refer to the description of each port.

### PxDNR Register

This is the register for setting output data. When a port is set to the "output mode", the value specified at PxDNR is output from the port.

### PxPRD Register

This is the register for reading input data. When a port is set to the "input mode", the current port input status can be read by reading PxPRD.

### PxCR Register

This register switches a port between input and output. A port can be switched between the "input mode" and the "output mode".

### PxFC Register

This register enables the secondary function output of each port. The secondary function output of each port can be enabled or disabled.

### PxPU Register

This register determines whether or not the built-in pull-up resistor is connected when a port is used in the input mode.

## 8.2 List of I/O Ports Settings

For the setting methods for individual I/O ports, refer to the following table.

Port Name	Pin Name	Function	Register Set Value			
			PxCR	PxOUTCR	PxFC	Other Required Settings
Port P0	P03 to P00	Port input	0	Without register	0	
		Port output	1		0	
	P03	XTOUT	*		Without register	
	P02	XTIN	*		1	
	P01	XOUT	*		Without register	
	P00	XIN	*		1	
Port P1	P13 to P11	Port input	0	Without register	Without register	
		Port output	1			
	P10	Port input	0			Note 1
	P10	Port output	1			Note 1
	P13	INT1 input	0			
	P12	INT0B input	0			
	P11	INT5 input	0			
	P11	STOPB input	0			
	P10	RESETB input	*			Note 1
Port P2	P27 to P20	Port input	0	*	*	
		Port output	1	**	0	
	P27	RXD2 input	0	*	0	UATCNG<UAT2IO>="0"
		TXD2 output	1	**	1	UATCNG<UAT2IO>="1"
	P26	TXD2 output	1	**	1	UATCNG<UAT2IO>="0"
		RXD2 input	0	*	0	UATCNG<UAT2IO>="1"
	P25	SCLK0 input	0	*	*	SERSEL<SRSEL0>="01"
		SLK0 output	1	**	1	SERSEL<SRSEL0>="01"
	P24	SCL0 input/output	1	Without register	1	SERSEL<SRSEL0>="*0"
	P23	SDA0 input/output	1	Without register	1	SERSEL<SRSEL0>="*0"
	P22	SCLK0 input	0	*	*	SERSEL<SRSEL0>="10" SERSEL<SRSEL2>="0"
		SCLK0 output	1	**	1	SERSEL<SRSEL0>="10" SERSEL<SRSEL2>="0"
	P21	RXD0 input	0	*	*	SERSEL<SRSEL0>="0*" SERSEL<SRSEL2>="0" UATCNG<UAT0IO>="0"
		TXD0 output	1	**	1	SERSEL<SRSEL0>="0*" SERSEL<SRSEL2>="0" UATCNG<UAT0IO>="1"

	P20	TXD0 output	1	**	1	SERSEL<SRSEL0>="0"* SERSEL<SRSEL2>="0" UATCNG<UAT0IO>="0"
		RXD0 input	0	*	*	SERSEL<SRSEL0>="0"* SERSEL<SRSEL2>="0" UATCNG<UAT0IO>="1"
Port 4	P47 to P40	Port input	0	Without register	0	
		Port output	1		0	
		AIN7 to AIN0	0		1	
		KW17 to KW14	*		*	KWUCR1
		KW13 to KW10	*		*	KWUCR0
Port P7	P77 to P70	Port input	0	Without register	*	
		Port output	1		0	
	P76	INT4 input	0		Without register	
	P75	INT3 input	0		Without register	
	P75	INT2 input	0		Without register	
	P74	DOVB output	1		1	
	P73	TCA1 input	0		*	
		PPGA1B output	1		1	
	P72	TCA0 input	0		*	SERSEL<TCA0SEL>="00"
		PPGA0B output	1		1	
	P71	TC01 input	0		*	
		PPG01 / PWM01 output	1		1	
	P70	TC00 input	0		*	
		PPG00 / PWM00 output	1		1	
Port P8	P81 to P80	Port input	0	Without register	*	
		Port output	1		0	
	P81	TC03 input	0		*	
		PPG03 / PWM03 output	1		1	
	P80	TC02 input	0		*	
		PPG02 / PWM02 output	1		1	
Port P9	P92 to P90	Port input	0	*	*	
		Port output	1	**	0	
	P91	RXD1 input	0	*	0	UATCNG<UAT1IO>="0"
		TXD1 output	1	**	1	UATCNG<UAT1IO>="1"
	P90	TXD1 output	1	**	1	UATCNG<UAT1IO>="0"
		RXD1 input	0	*	0	UATCNG<UAT1IO>="1"

Port Name	Pin Name	Function	Register Set Value			
			PxCR	PxOUTCR	PxFC	Other Required Settings
Port PB	PB7 to PB4	Port input	0	*	*	
		Port output	1	**	0	
	PB6	SLK0 input	0	*	*	SERSEL<SRSEL0>="10" SERSEL<SRSEL2>="1"
		SCLK0 output	1	**	1	SERSEL<SRSEL0>="10" SERSEL<SRSEL2>="1"
	PB5	RXD0 input	0	*	*	SERSEL<SRSEL0>="0*" SERSEL<SRSEL2>="1" UATCNG<UAT0IO>="0"
		TXD0 output	1	**	1	SERSEL<SRSEL0>="0*" SERSEL<SRSEL2>="1" UATCNG<UAT0IO>="1"
		SIO input	0	*	*	SERSEL<SRSEL0>="10" SERSEL<SRSEL2>="1"
	PB4	TXD0 output	1	**	1	SERSEL<SRSEL0>="0*" SERSEL<SRSEL2>="1" UATCNG<UAT0IO>="0"
		RXD0 input	0	*	*	SERSEL<SRSEL0>="0*" SERSEL<SRSEL2>="1" UATCNG<UAT0IO>="1"
		SO0 output	1	**	1	SERSEL<SRSEL0>="10" SERSEL<SRSEL2>="1"

**Table 8.2**List of I/O Port Settings

*Note 1): After the power is turned on, pin P10 serves as an external reset input. To use pin P10 as a port, refer to "How to use the external reset input pin as a port" of "5.1 Reset Control Circuit".*

*Note 2): The symbol and numeric characters in the table have the following meanings:*

Symbol and numeric	Meaning
0	Set "0"
1	Set "1"
*	Don't care (Operation is the same whether "1" or "0" is selected )
Without register	There is no register that corresponds to the bit

## 8.3 I/O Port Control Register

### 8.3.1 Port P0 (P03 to P00) Register

Port P0 is a 2-bit input / output port that can be set to input or output for each bit individually, and it is also used as the high-frequency external crystal connection pin and the low-frequency external crystal connection pin.

Port P0 contains a programmable pull-up resistor on the VDD side. This pull-up resistor can be used when the port is used in the input mode.

Port Name	P03	P02	P01	P00
Secondary function	XTOUT	XTIN	XOUT	XIN

**Table 8.3 Port P0**

**Port P0 Output Latch Register**

<b>P0DR (0x0000)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	-	-	-	-	P03	P02	P01	P00
Read/Write	R	R	R	R	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0
Function	0:				Outputs L level when the output mode is selected			
	1:				Outputs H level when the output mode is selected			

**Port P0 Input / Output Control Register**

<b>P0CR (0x0F1A)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	-	-	-	-	P0CR3	P0CR2	P0CR1	P0CR0
Read/Write	R	R	R	R	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0
Function	0:				Input mode (port input)			
	1:				Output mode (port output)			

**Port P0 Function Control Register**

<b>P0FC (0x0F34)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	-	-	-	-	-	P0FC2	-	P0FC0
Read/Write	R	R	R	R	R	R/W	R	R/W
After reset	0	0	0	0	0	0	0	0
Function	0:					Port function		Port function
	1:					XTIN (1)		XIN (1)

*Note 1): When SYSCR2 <XEN> is "1", setting P0FC0 to "0" generates a system clock (internal factor) reset. Normally, ports P00 or P01 are not used as ports, so P0FC0 must be set to "1".*

*Note 2): Symbol "1" means secondary function input.*

**Port P0 Built-in Pull-up Resistor Control Resistor**

<b>POPU (0x0F27)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
BitSymbol	-	-	-	-	POPU3	POPU2	POPU1	POPU0
Read/Write	R	R	R	R	R/W	R/W	R/W	R/W
Afterreset	0	0	0	0	0	0	0	0
Function	0:				The built-in pull-up resistor is not connected.			
	1:				The built-in pull-up resistor is connected. (Note)			

*Note): The resistor is connected in the input mode only. Under any other conditions, setting to "1" does not make the resistor connected.*

### Port P0 Input Data Register

POPRD (0x000D)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	-	POPRD3	POPRD2	POPRD1	POPRD0
Read/Write	R	R	R	R	R	R	R	R
After reset	0	0	0	0	*	*	*	*
Function	If the port is in the input mode, the contents of the port are read. If not, "0" is read.							

Set condition		POPRDi read value
P0FC0	P0CRi	
*	1	"0"
1	*	"0"
0	0	Contents of port

POPRD Read Value (P00 to P01)

Set condition		POPRDj read value
P0FC2	P0CRj	
*	1	"0"
1	*	"0"
0	0	Contents of port

POPRD Read Value (P02 to P03)

### 8.3.2 Port P1(P13 to P10) Register

Port P1 is a 1-bit input / output port that can be set to input or output for each bit individually.

Port P1 contains a programmable pull-up resistor on the VDD side. This pull-up can be used when the port is used in the input mode.

After reset, pin P10 serves as an I/O port. To use pin P10 as an external reset input, refer to "How to use the external reset input pin as a port" of "5.1 Reset Control Circuit".

Port Name	P13	P12	P11	P10
Secondary function	INT1	INT0B	INT5B STOPB	RESETB

**Table 8.4 Port P1**

**Port P1 Output Latch Register**

P1DR (0x0001)		7	6	5	4	3	2	1	0
BitSymbol		-	-	-	-	P13	P12	P11	P10
Read/Write		R	R	R	R	R/W	R/W	R/W	R/W
Afterreset		0	0	0	0	0	0	0	0
Function	0:					Outputs L level when the output mode is selected.			
	1:					Outputs H level when the output mode is selected.			

**Port P1 Input / Output Control Register**

P1CR (0x0F1B)		7	6	5	4	3	2	1	0
BitSymbol		-	-	-	-	P1CR3	P1CR2	P1CR1	P1CR0
Read/Write		R	R	R	R	R/W	R/W	R/W	R/W
Afterreset		0	0	0	0	0	0	0	0
Function	0:					Input mode (port input)			
	1:					INT1 (I)	INT0B (I)	INT5B (I) STOPB (I)	-
1:		Output mode (port output)							

**Port P1 Built-in Pull-up Resistor Control Resistor**

P1PU (0x0F28)		7	6	5	4	3	2	1	0
BitSymbol		-	-	-	-	P1PU3	P1PU2	P1PU1	P1PU0
Read/Write		R	R	R	R	R/W	R/W	R/W	R/W
Afterreset		0	0	0	0	0	0	0	0
Function	0:					The built-in pull-up resistor is not connected.			
	1:					The built-in pull-up resistor is connected.			

*Note:* The resistor is connected in the input mode only. Under any other conditions, setting to "1" does not make the resistor connected.

**Port P1 Input Data Register**

P1PRD (0x000E)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	-	P1PRD3	P1PRD2	P1PRD1	P1PRD0
Read/Write	R	R	R	R	R	R	R	R
After reset	0	0	0	0	*	*	*	*
Function	If the port is in the input mode, the contents of the port are read. If not, "0" is read.							

Note: "\*" means "don't care".

Set condition	P1PRDi read value
P1CRi	
0	Contents of port
1	"0"

Note: i=0 to 3

**8.3.3 Port P2 (P27 to P20) Register**

Port P2 is a 8-bit input / output port that can be set to input or output for each bit individually.

The output circuit has the P-channel output control function and either the sink open drain output or the CMOS output can be selected. Port P2 contains a programmable pull-up resistor on the VDD side. This pull-up resistor can be used when the port is used in the input mode or as a sink open drain output.

Port Name	P27	P26	P25	P24	P23	P22	P21	P20
Secondary function	RXD2 TXD2	TXD2 RXD2	SCLK0	SIO SCL0	SO0 SDA0	SCLK0	SIO RXD0 TXD0 OCDIO	SO0 TXD0 RXD0 OCDCK

Figure 7.4 Port P2

**Port P2 Output Latch Register**

P2DR (0x0002H)	7	6	5	4	3	2	1	0
Bit Symbol	P27	P26	P25	P24	P23	P22	P21	P20
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0
Function	0: Outputs L level when the output mode is selected.							
	1: Outputs H level when the output mode is selected, which serves as Hi-Z or pull-up depending on settings of P2OUTCR and P2PU.							

**Port P2 Input / Output Control Register**

P2CR (0x0F1CH)		7	6	5	4	3	2	1	0
Bit Symbol		P2CR7	P2CR6	P2CR5	P2CR4	P2CR3	P2CR2	P2CR1	P2CR0
Read/Write		R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset		0	0	0	0	0	0	0	0
Function	0:	Input mode (port input)							
		RXD2 (I)	RXD2 (I)	SCLK0 (I)	SIO (I)	-	SCLK0 (I)	RXD0(I) SIO (I)	RXD0 (I)
	1:	Output mode (port output)							
		RXD2 (O)	TXD2 (O)	SCLK0 (O)	SCL0 (I/O)	SDA0 (I/O) SO(O)	SCLK0 (O)	TXD0 (O)	TXD0 (O) SO0 (O)

*Note: Symbol "I" means secondary function input. Symbol "O" means secondary function output. Symbol "I/O" means secondary function input/output*

**Port P2 Function Control Register**

P2FC (0x0F36H)		7	6	5	4	3	2	1	0
Bit Symbol		P2FC7	P2FC6	P2FC5	P2FC4	P2FC3	P2FC2	P2FC1	P2FC0
Read/Write		R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset		0	0	0	0	0	0	0	0
Function	0:	Port function							
	1:	TXD2 (O)	TXD2 (O)	SCLK0 (O)	SCL0 (I/O)	SDA0 (I/O) SO0 (O)	SCLK0 (O)	TXD0(O)	TXD0(O) SO0 (O)

**Port P2 Output Control Register**

P2OUTCR (0x0F43H)		7	6	5	4	3	2	1	0
Bit Symbol		P2OUT7	P2OUT6	P2OUT5	-	-	P2OUT2	P2OUT1	P2OUT0
Read/Write		R/W	R/W	R/W	R	R	R/W	R/W	R/W
After reset		0	0	0	0	0	0	0	0
Function	0:	CMOS output				CMOS output			
	1:	Open-drain output				Open-drain output			

**Port P2 Built-in Pull-up Resistor Control Resistor**

P2PU (0x0F29H)		7	6	5	4	3	2	1	0
Bit Symbol		P2PU7	P2PU6	P2PU5	-	-	P2PU2	P2PU1	P2PU0
Read/Write		R/W	R/W	R/W	R	R	R/W	R/W	R/W
After reset		0	0	0	0	0	0	0	0
Function	0:	The built-in pull-up resistor is not connected.				The built-in pull-up resistor is connected.			
	1:	The resistor is connected only when the port is used in the input mode or as the open drain output. Under any other conditions, setting to "1" does not make the resistor connected.				The resistor is connected only when the port is used in the input mode or as the open drain output. Under any other conditions, setting to "1" does not make the resistor connected.			

**Port P2 Input Data Register**

P2PRD (0x000FH)	7	6	5	4	3	2	1	0
Bit Symbol	P2PRD7	P2PRD6	P2PRD5	P2PRD4	P2PRD3	P2PRD2	P2PRD1	P2PRD0
Read/Write	R	R	R	R	R	R	R	R
After reset	*	*	*	*	*	*	*	*
Function	If the port is used in the input mode or as the open drain output, the contents of the port are read. If not, "0" is read.			The contents of the port are read without condition.		If the port is used in the input mode or as the open drain output, the contents of the port are read. If not, "0" is read.		

Set Condition		P2PRDi read value
P2CRi	P2OUTCRi	
0	*	Contents of port
1	0	"0"
1	1	Contents of port

**Table 7.7 P2PRD Read Value (P20 to P22, P25 to P27)**

Note 1): \*: Don't care

Note 2): i= 0 to 2, 5 to 7.

**8.3.4 Port P4 (P47 to P40) Register**

Port P4 is an 8-bit input/output port that can be set to input or output for each bit individually, and it is also used as the key-on wakeup input.

Except P46, Port P4 contains a programmable pull-up resistor on the VDD side. This pull-up resistor can be used when the port is used in the input mode.

Port Name	P47	P46	P45	P44	P43	P42	P41	P40
Secondary function	AIN7 KW17	AIN6 KW16	AIN5 KW15	AIN4 KW14	AIN3 KW13	AIN2 KW12	AIN1 KW11	AIN0 KW10

**Table 8.5 Port P4**

**Port P4 Output Latch Register**

P4DR (0x0004)	7	6	5	4	3	2	1	0
BitSymbol	P47	P46	P45	P44	P43	P42	P41	P40
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Afterreset	0	0	0	0	0	0	0	0
Function	0: Outputs L level when the output mode is selected.							
	1: Outputs H level when the output mode is selected.							

#### Port P4 Input / Output Control Register

P4CR (0x0F1E)	7	6	5	4	3	2	1	0
BitSymbol	P4CR7	P4CR6	P4CR5	P4CR4	P4CR3	P4CR2	P4CR1	P4CR0
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Afterreset	0	0	0	0	0	0	0	0
Function	0: Input mode (port input)							
	AIN7 (I)	AIN6 (I)	AIN5 (I)	AIN4 (I)	AIN3 (I) VREF (I)	AIN2 (I)	AIN1 (I)	AIN0 (I)
Function	1: Output mode (port output)							

Note): Symbol "I" means secondary function input.

#### Port P4 Function Control Register

P4FC (0x0F38)	7	6	5	4	3	2	1	0
BitSymbol	P4FC7	P4FC6	P4FC5	P4FC4	P4FC3	P4FC2	P4FC1	P4FC0
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Afterreset	0	0	0	0	0	0	0	0
Function	0: Port function							
	AIN7 (I)	AIN6 (I)	AIN5 (I)	AIN4 (I)	AIN3 (I) VREF (I)	AIN2 (I)	AIN1 (I)	AIN0 (I)
Function	1: (Reserved)							

Note 1: When the key-on wakeup input (KWli) is enabled, there is no need to set P4FCi.

#### Port P4 Built-in Pull-up Resistor Control Register

P4PU (0x0F2B)	7	6	5	4	3	2	1	0
BitSymbol	P4PU7	P4PU6	P4PU5	P4PU4	P4PU3	P4PU2	P4PU1	P4PU0
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Afterreset	0	0	0	0	0	0	0	0
Function	0: The built-in pull-up resistor is not connected.							
	1: The built-in pull-up resistor is connected. (Note)							

Note): The resistor is connected only when the key-on wakeup input (KWli) is enabled or the port is used in the input mode (P4FCi="0" and P4CRi="0"). Under any other conditions, setting to "1" does not make the resistor connected.

#### Port P4 Input Data

P4PRD (0x0011)	7	6	5	4	3	2	1	0
Bit Symbol	P4PRD7	P4PRD6	P4PRD5	P4PRD4	P4PRD3	P4PRD2	P4PRD1	P4PRD0
Read/Write	R	R	R	R	R	R	R	R
After reset	*	*	*	*	*	*	*	0
Function	If the port is in the input mode, the contents of the port are read. If not, "0" is read.							

Set Condition		P4PRDi read value
P4CRi	P4FCi	
0	0	Contents of port
*	1	"0"
1	*	"0"

**Table 8.6 P4PRD Read Value**

Note 1): \*: Don't care

Note 2): i= 0 to 7

### 8.3.5 Port P7 (P77 to P70) Register

Port P7 is a 8-bit input / output port that can be set to input or output for each bit individually, and it is also used as the external interrupt input, the divider output and the timer counter input/output.

	P77	P76	P75	P74	P73	P72	P71	P70
Secondary function	INT4	INT3	INT2	DVOB	PPGA1B TCA1	PPGA0B TCA0	PPG01B PWM01B TC01	PPG00B PWM00B TC00

**Table 8.7 Port P7**

#### Port P7 Output Latch Register

<b>P7DR (0x0007)</b>	7	6	5	4	3	2	1	0
BitSymbol	P77	P76	P75	P74	P73	P72	P71	P70
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Afterreset	0	0	0	0	0	0	0	0
Function	0: Outputs L level when the output mode is selected.							
	1: Outputs H level when the output mode is selected.							

#### Port P7 Input / Output Control Register

<b>P7CR (0x0F21)</b>	7	6	5	4	3	2	1	0
BitSymbol	P7CR7	P7CR6	P7CR5	P7CR4	P7CR2	P7CR2	P7CR1	P7CR0
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Afterreset	0	0	0	0	0	0	0	0
	0: Input mode (port input)							
		INT4 (I)	INT3 (I)	INT2 (I)	-	TCA1 (I)	TAC0 (I)	TC01 (I)
	1: Output mode (port output)							
		-	-	-	DVOB (O)	PPGA1B (O)	PPGA0B (O)	PPG01B (O) PMW01B (O)

Note): Symbol "I" means secondary function input. Symbol "O" means secondary function output.

**Port P7 Function Control Register**

P7FC (0x0F3B)	7	6	5	4	3	2	1	0
BitSymbol	-	-	-	P7FC4	P7FC3	P7FC2	P7FC1	P7FC0
Read/Write	R	R	R	R/W	R/W	R/W	R/W	R/W
Afterreset	0	0	0	0	0	0	0	0
Function	0:	Port function						
	1:				DVOB (O)	PPGA1B (O)	PPGA0B (O)	PPG01B (O) PWM01B (O)

**Port P7 Input Data**

P7PRD (0x0014)	7	6	5	4	3	2	1	0
Bit Symbol	P7PRD7	P7PRD6	P7PRD5	P7PRD4	P7PRD3	P7PRD2	P7PRD1	P7PRD0
Read/Write	R	R	R	R	R	R	R	R
After reset	*	*	*	*	*	*	*	*
Function	If the port is in the input mode, the contents of the port are read. If not, "0" is read.							

Set condition	P7PRDi read value
P7CRi	
0	Contents of port
1	"0"

Note: i=0 to 7

**Table 8.7 P7RRD Read Value**

**8.3.6 Port P8 (P81 to P80) Register**

Port P8 is a 2-bit input/output port that can be set to input or output for each bit individually, and it is also used as the timer counter input/output.

Port Name	P81	P80
Secondary function	PPG03B PWM03B TC03	PPG02B PWM02B TC02

**Table 8.8 Port P8**

**Port P8 Output Latch Register**

P8DR (0x0008)		7	6	5	4	3	2	1	0
Bit Symbol		-	-	-	-	-	-	P81	P80
Read/Write		R	R	R	R	R	R	R/W	R/W
After reset		0	0	0	0	0	0	0	0
Function	0:							Outputs L level when the output mode is selected	
	1:							Outputs H level when the output mode is selected	

**Port P8 Input / Output Control Register**

P8CR (0x0F22)		7	6	5	4	3	2	1	0
Bit Symbol		-	-	-	-	-	-	P8CR1	P8CR0
Read/Write		R	R	R	R	R	R	R/W	R/W
After reset		0	0	0	0	0	0	0	0
Function	0:							Input mode (port input)	
								TC03 (I)	TC02 (I)
	1:							Output mode (port output)	
								PPG03B (O)	PPG02B (O)
							PWM03 (O)	PWM02 (O)	

**Port P8 Function Control Register**

P8FC (0x0F3C)		7	6	5	4	3	2	1	0
Bit Symbol		-	-	-	-	-	-	P8FC1	P8FC0
Read/Write		R	R	R	R	R	R	R/W	R/W
After reset		0	0	0	0	0	0	0	0
Function	0:							Port function	
	1:							PPG03B (O)	PPG02B (O)
								PWM03 (O)	PWM02 (O)

**Port P8 Input Data Register**

P8PRD (0x0015)		7	6	5	4	3	2	1	0
Bit Symbol		-	-	-	-	-	-	P8PRD1	P8PRD0
Read/Write		R	R	R	R	R	R	R	R
After reset		0	0	0	0	0	0	*	*
Function								If the port is in the input mode, the contents of the port are read. If not, "0" is read.	

Note : "\*" means "don't care".

Set condition	P8PRDi read value
P8CRi	
0	Contents of port
1	"0"

**Table 8.9 P8PRD Read Value**

### 8.3.7 Port P9 (P91 to P90)

Port P9 is a 2-bit input/output port that can be set to input or output for each bit individually, and it is also used as the UART.

The output circuit has the P-channel output control function and either the sink open drain output or the CMOS output can be selected. Port P9 contains a programmable pull-up resistor on the VDD side. This pullup resistor can be used when the port is used in the input mode or as a sink open drain output.

Port Name	P91	P90
Secondary function	RXD1 TXD1	TXD1 RXD1

**Table 8.10 Port P9**

#### Port P9 Output Latch Register

P9DR (0x0009)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	-	-	-	P91	P90
Read/Write	R	R	R	R	R	R	R/W	R/W
After reset	0	0	0	0	0	0	0	0
Function	0:						Outputs L level when the output mode is selected	
	1:						Outputs H level when the output mode is selected. (Serves as Hi-Z or pull-up depending on settings of P9OUTCR and P9PU.)	

#### Port P9 Input / Output Control Register

P9CR (0x0F23)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	-	-	-	P9CR1	P9CR0
Read/Write	R	R	R	R	R	R	R/W	R/W
After reset	0	0	0	0	0	0	0	0
Function	0:						Input mode (port input)	
	1:						RXD1 (I)	RXD1 (I)
							Output mode (port output)	
							TXD1(O)	TXD1(O)

**Port P9 Function Control Register**

P9FC (0x0F3D)		7	6	5	4	3	2	1	0
Bit Symbol		-	-	-	-	-	-	P9FC1	P9FC0
Read/Write		R	R	R	R	R	R	R/W	R/W
After reset		0	0	0	0	0	0	0	0
Function	0:							Port function	
	1:							TXD1(O)	TXD1(O)

**Port P9 Output Control**

P9OUTCR (0x0F4A)		7	6	5	4	3	2	1	0
Bit Symbol		-	-	-	-	-	-	P9OUT1	P9OUT0
Read/Write		R	R	R	R	R	R	R/W	R/W
After reset		0	0	0	0	0	0	0	0
Function	0:							C-MOS output	
	1:							Open drain output	

**Port P9 built-in pull-up resistor control**

P9PU (0x0F30)		7	6	5	4	3	2	1	0
Bit Symbol		-	-	-	-	-	-	P9PU1	P9PU0
Read/Write		R	R	R	R	R	R	R/W	R/W
After reset		0	0	0	0	0	0	0	0
Function	0:							The built-in pull-up resistor is not connected.	
	1:							Note 1	

Note 1: 1: The built-in pull-up resistor is connected. (The resistor is connected only when the port is used in the input mode or as the open drain output. Under any other conditions, setting to "1" does not make the resistor connected.)

**Port P9 Input Data Register**

P9PRD (0x0016)		7	6	5	4	3	2	1	0
Bit Symbol		-	-	-	-	-	-	P9PRD1	P9PRD0
Read/Write		R	R	R	R	R	R	R	R
After reset		0	0	0	0	0	0	*	*
Function								If the port is used in the input mode or as the sink open drain output, the contents of the port are read.  If not, "0" is read.	

Note: "\*" means "don't care".

Set condition		P9PRDi read value
P9CRi	P9OUTCRi	
0	*	Contents of port
1	0	"0"
1	1	Contents of port

*Note: i=0 to 1*

**Table 8.11 P9PRD Read Value**

### 8.3.8 Port PB (PB7 to PB4)

Port PB is an 4-bit input/output port that can be set to input or output for each bit individually, and it is also used as the serial interface input/output and the UART input/output.

The output circuit has the P-channel output control function and either the sink open drain output or the CMOS output can be selected.

Port Name	PB7	PB6	PB5	PB4
Secondary function	-	SCLK0	SIO RXD0 TXD0	SO0 TXD0 RXD0

**Table 8.12 Port PB**

#### Port PB Output Latch Register

PBDR (0x000B)		7	6	5	4	3	2	1	0
Bit Symbol		PB7	PB6	PB5	PB4	-	-	-	-
Read/Write		R/W	R/W	R/W	R/W	R	R	R	R
After reset		0	0	0	0	0	0	0	0
Function	0:	Outputs L level when the output mode is selected.							
	1:	Outputs H level when the output mode is selected.							

**Port PB Input / Output Control Register**

PBCR (0x0F25)	7	6	5	4	3	2	1	0
Bit Symbol	PBCR7	PBCR6	PBCR5	PBCR4	-	-	-	-
Read/Write	R/W	R/W	R/W	R/W	R	R	R	R
After reset	0	0	0	0	0	0	0	0
Function	0:	Input mode (port input)						
	1:	Output mode (port output)						

**Port P9 Function Control Register**

P9FC (0x0F3F)	7	6	5	4	3	2	1	0
Bit Symbol	-	PBFC6	PBFC5	PBFC4	-	-	-	-
Read/Write	R	R/W	R/W	R/W	R	R	R	R
After reset	0	0	0	0	0	0	0	0
Function	0:	Port function						
	1:		SCLK0 (O)	TXD0(O)	TXD0(O) SO0 (O)			

**Port P9 Output Control**

P9OUTCR (0x0F4C)	7	6	5	4	3	2	1	0
Bit Symbol	PBOUT7	PBOUT6	PBOUT5	PBOUT4	-	-	-	-
Read/Write	R/W	R/W	R/W	R/W	R	R	R	R
After reset	0	0	0	0	0	0	0	0
Function	0:	C-MOS output						
	1:	Open drain output						

**Port P9 Input Data Register**

P9PRD (0x0018)	7	6	5	4	3	2	1	0
Bit Symbol	PBPRD7	PBPRD6	PBPRD5	PBPRD4	-	-	-	-
Read/Write	R	R	R	R	R	R	R	R
After reset	*	*	*	*	*	*	*	*
Function	If the port is used in the input mode or as the open drain output, the contents of the port are read. If not, "0" is read.							

Note : "\*" means "don't care".

Set condition		PBPRDi read value
PBCRi	PBOUTCRI	
0	*	Contents of port
1	0	"0"
1	1	Contents of port

Note 1: \*: Don' t care


Note 2: i = 4 to 7

**Table 8.13 PBPRD Read Value**

### 8.4 Serial Interface Selecting Function

In MQ6905, the built-in serial interface (SIO, UART and I2C) communication pins and interrupt source assignment can be changed. Two out of three functions, SIO0, UART0 and I2C0, can be used at the same time by using this selecting function.

The input pins of the 16-bit timer counter A0 input (TCA0 input) can be changed by using this selecting function.

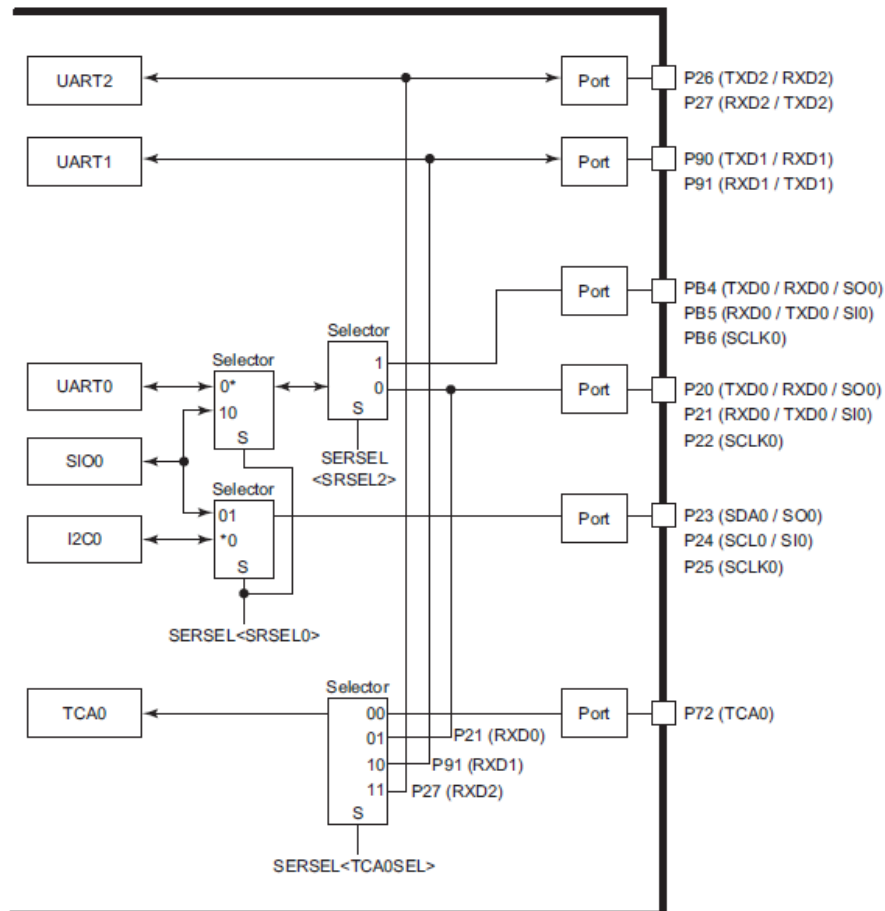

**Figure 8.2 Serial Interface Selecting Function**

### Peripheral Function Input Selection Control Register

ITSEL (0x0FCA)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	-	-	-	ITSEL1	ITSEL0
Read/Write	R	R	R	R	R	R	R	R
After reset	0	0	0	0	0	0	0	0

ITSEL1	Select KW17	0: 1:	KW17
ITSEL0	Select KW16	0: 1:	KW16

*Note 1: The operation for changing ITSEL must be executed while the applicable serial interface and timer counter operations are stopped. If ITSEL is switched during operation of these peripheral functions, each peripheral function may receive (transmit) unexpected data and operate improperly.*

*Note 2: It is recommended to clear the interrupt latch for the applicable peripheral function immediately after changing ITSEL.*

### Serial Interface Selection Control Register

SERSEL (0x0FCB)	7	6	5	4	3	2	1	0
Bit Symbol	TCA0SEL		-	SRSEL2	-	-	SRSELO	
Read/Write	R/W	R/W	R/W	R/W	R	R	R/W	R/W
After reset	0	0	0	0	0	0	0	0

TCA0SEL	16-bit timer counter A0 input switching	00: 01: 10: 11:	P72 input (TCA0) P21 input (also used as RXD0) P91 input (also used as RXD1) P27 input (also used as RXD2)
SRSEL2	Select UART0/SIO0 input/output port	0: 1:	Select P20, P21, P22 Select PB4, PB5, PB6
SRSELO	Serial interface selection 0	00: 01: 10: 11:	Select UART0, I2C0 Select UART0, SIO0 Select SIO0, I2C0 Reserved

*Note 1: The operation for changing SERSEL must be executed while the applicable serial interface and timer counter operations are stopped. If SERSEL is switched during operation of these peripheral functions, each peripheral function may receive (transmit) unexpected data and operate improperly.*

*Note 2: It is recommended to clear the interrupt latch for the applicable serial interface immediately after changing SERSEL. Interrupt latches are common to INTRXD and INTSIO and to INTSBI and INTSIO. Therefore, if an interrupt occurs before or after SERSEL is switched, it is difficult to tell which function has caused the interrupt.*

**UART Input/Output Change Control Register**

UATCNG (0x0F57)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	-	-	UAT2IO	UAT1IO	UAT0IO
Read/Write	R	R	R	R	R	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

			RXD pin				TXD pin		
UAT2IO	Select UART2 input/ output port	0: 1:	P27 P26				P26 P27		
UAT1IO	Select UART1 input/ output port	0: 1:	P91 P90				P90 P91		
UAT0IO	Select UART0 input/ output port		SERSEL <SERSEL2>="0"	SERSEL <SERSEL2>="0"	SERSEL <SERSEL2>="0"	SERSEL <SERSEL2>="1"			
		0: 1:	P21 P20	PB5 PB4	P20 P21	PB4 PB5			

*Note 1: The operation for changing UATCNG must be executed while the applicable serial interface operations are stopped.*

SERSEL <SRSEL0>	SERSEL <SRSEL2>	UATCNG <UAT0IO>	Port									Interrupt			
			UART0/SIO0						I2C0/SIO0			IL7, IL6, IL15			
			PB4	PB5	PB6	P20	P21	P22	P23	P24	P25				
00:	0:	0:	Note 1	Note 1	Note 1	TXD0	RXD0	Note 1	SDA0	SCL0	Note 1	INTTXD0	INTRXD0	INTSBI0	
		1:				RXD0	TXD0								
	1:	0:	TXD0	RXD0	Note 1	Note 1	Note 1	Note 1							
		1:	RXD0	TXD0											
01:	0:	0:	Note 1	Note 1	Note 1	TXD0	RXD0	Note 1	SIO0	SIO0	SCLK0	INTTXD0	INTRXD0	INTSIO0	
		1:				RXD0	TXD0								
	1:	0:	TXD0	RXD0	Note 1	Note 1	Note 1	Note 1							
		1:	RXD0	TXD0											
10:	0:	0 or 1:	Note 1	Note 1	Note 1	SIO0	SIO0	SCLK0	SDA0	SCL0	Note 1	-	INTSIO0	INTSBI0	
	1:	0 or 1:	SIO0	SIO0	SCLK0	Note 1	Note 1	Note 1							
11:	0 or 1:	0 or 1:	Reserved												

*Note 1: Can be used as a port. (Set the function register (PxFC) to "0".)*

**Table 8.14: Select input/output port and interrupt**

## 9. 10-bit AD Converter (ADC)

MQ6905 has a real 10-bit AD converter (ADC), which is a successive approximation type ADC.

### 9.1 Configuration

The circuit configuration of the 10-bit AD converter is shown in Figure 9.1.

It consists of control registers ADCCR1 and ADCCR2, converted value registers ADCDRL and ADCDRH, a DA converter, a sample-hold circuit, a comparator, a successive comparison circuit, etc.

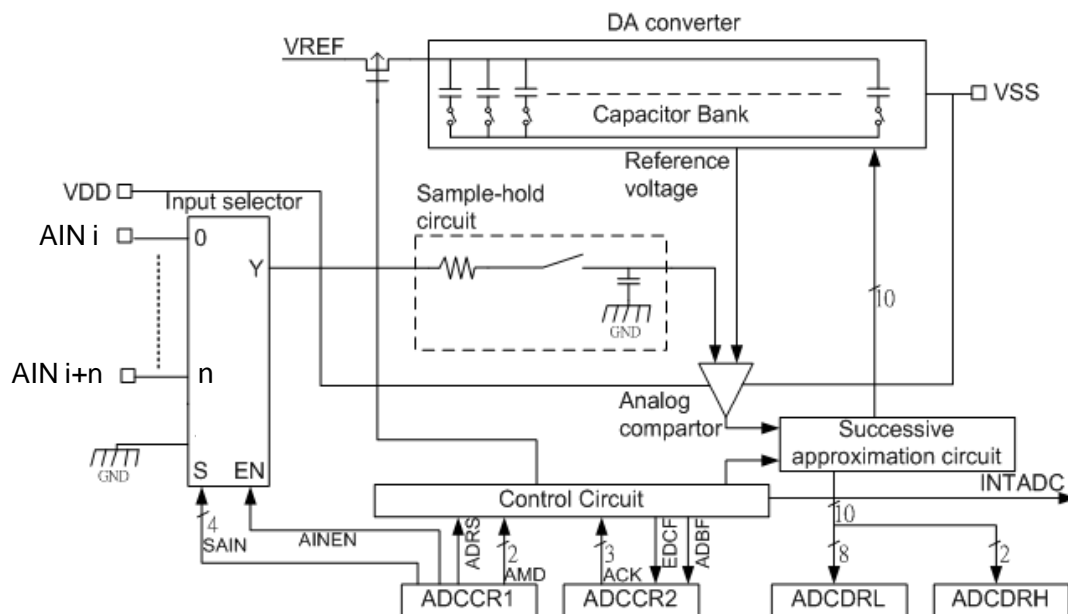


Figure 9.1 10-bit AD Converter

Note 1): Before using the AD converter, set an appropriate value to the I/O port register which is also used as an analog input port.  
For details, see the section on "8 I/O ports".

### 9.2 Control

The AD converter consists of the following four registers:

1. AD converter control register 1 (ADCCR1)  
This register selects an analog channel in which to perform AD conversion, selects an AD conversion operation mode, and controls the start of the AD converter.
2. AD converter control register 2 (ADCCR2)  
This register selects the AD conversion time, and monitors the operating status of the AD converter.
3. AD converter reference voltage register (ADCVRF)

The register selects the reference voltage source of the AD converter.

#### 4. AD converted value registers (ADCDRH and ADCDRL)

These registers store the digital values generated by the AD converter.

#### AD Converter Control Register 1

ADCCR1 (0x0034H)	7	6	5	4	3	2	1	0
Bit Symbol	ADRS	AMD		AINEN	SAIN			
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

<b>ADRS</b>	AD conversion start	0: 1:	- AD conversion start
<b>AMD</b>	AD operating mode	00: 01: 10: 11:	AD operation disable, forcibly stop AD operation Single mode Reserved Repeat mode
<b>AINEN</b>	Analog input control	0: 1:	Analog input disable Analog input enable
<b>SAIN</b>	Analog input channel select	0000 0001: 0010: 0011: 0100: 0101: 0110: 0111: 1000 1001 1010 1011 1100 Others	AIN0 AIN1 AIN2 AIN3 AIN4 AIN5 AIN6 AIN7 Reserved Reserved Reserved Reserved Reserved -

Note 1): Do not perform the following operations on the ADCCR1 register while AD conversion is being executed (ADCCR2 <ADBF>="1").

- Changing SAIN
- Setting AINEN to "0"
- Changing AMD (except a forced stop by setting AMD to "00")
- Setting ADRS to "1"

Note 2): If you want to disable all analog input channels, set AINEN to "0".

Note 3): Although analog input pins are also used as input/output ports, it is recommended for the purpose of maintaining the accuracy of AD conversion that you do not execute input/output instructions during AD conversion. Additionally, do not input widely varying signals into the ports adjacent to analog input pins.

Note 4): When STOP, IDLE0 or SLOW mode is started, ADRS, AMD and AINEN are initialized to "0". If you use the AD converter after returning to NORMAL mode, you must reconfigure ADRS, AMD and AINEN.

Note 5): After the start of AD conversion, ADRS is automatically cleared to "0" ("0" is read).

**AD Converter Control Register 2**

ADCCR2 (0x0035H)	7	6	5	4	3	2	1	0
Bit Symbol	EOCF	ADBF	-	-	-	ACK		
Read/Write	R	R	R	R	W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

<b>EOCF</b>	AD conversion end flag	0: 1:	Before conversion or during conversion Conversion end
<b>ADBF</b>	AD conversion BUSY flag	0: 1:	AD conversion being halted AD conversion being executed
<b>ACK</b>	AD conversion time select		Refer to Table 9.1 for AD conversion time

Note 1): Make sure that you make the ACK setting when AD conversion is in a halt condition (ADCCR2 <ADBF>="0").

Note 2): Make sure that you write "0" to bit 3 of ADCCR2.

Note 3): If STOP, IDLE0 or SLOW mode is started, EOCF and ADBF are initialized to "0".

Note 4): If the AD converted value register (ADCDRH) is read, EOCF is cleared to "0". It is also cleared to "0" if AD conversion is started (ADCCR1 <ADRS>="1") without reading ADCDRH after completing AD conversion in single mode.

Note 5): If an instruction to read ADCCR2 is executed, 0 is read from bits 3 through 5.

ACK setting	Conversion time	Frequency (fcgck)									
		16MHz	10MHz	8MHz	5MHz	4MHz	2.5MHz	2MHz	1MHz	0.5MHz	0.25 MHz
000	32/fcgck	-	-	-	-	-	12.8 μs	16.0 μs	32.0 μs	64.0 μs	128.0 μs
001	64/fcgck	-	-	-	12.8 μs	16.0 μs	25.6 μs	32.0 μs	64.0 μs	128.0 μs	-
010	128/fcgck	-	12.8 μs	16.0 μs	25.6 μs	32.0 μs	51.2 μs	64.0 μs	128.0 μs	-	-
011	256/fcgck	16.0 μs	25.6 μs	32.0 μs	51.2 μs	64.0 μs	102.4 μs	128.0 μs	-	-	-
100	512/fcgck	32.0 μs	51.2 μs	64.0 μs	102.4 μs	128.0 μs	-	-	-	-	-
101	1024/fcgck	64.0 μs	102.4 μs	128.0 μs	-	-	-	-	-	-	-
11*	Reserved										

**Table 9.1 ACK Settings and Conversion Times Relative to Frequencies**

Note 1): Spaces indicated by "-" in the above table mean that it is prohibited to establish conversion times in these spaces. fcgck: High Frequency oscillation clock [Hz]

Note 2): The conversion time must be longer than the following time by analog reference voltage (VREF)

- VREF = 2.7 to 5.5V 12.8μs or longer.

- VREF = 2.0 to 2.7V 25.6μs or longer.

Note 3): Above conversion times do not include the time shown below.

- Time from when ADCCR1<ADRS> is set to 1 to when AD conversion is started

- Time from when AD conversion is finished to when a converted value is stored in ADCDRL and ADCDRH.

Please refer to below table for longest wakeup time vs. ACK setting.

ACK Setting					
000	001	010	011	100	101
32/fcgck	64/fcgck	128/fcgck	256/fcgck	512/fcgck	1024/fcgck

**Table 9.2 ADC Wakeup Time vs. ACK Setting**

**AD Converted Value Register (Lower Side)**

ADCDRL (0x0036H)	7	6	5	4	3	2	1	0
Bit Symbol	AD07	AD06	AD05	AD04	AD03	AD02	AD01	AD00
Read/Write	R	R	R	R	R	R	R	R
After reset	0	0	0	0	0	0	0	0

**AD Converted Value Register (Upper Side)**

ADCDRH (0x0037H)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	-	-	-	AD09	AD08
Read/Write	R	R	R	R	R	R	R	R
After reset	0	0	0	0	0	0	0	0

Note 1): A read of ADCDRL or ADCDRH must be read after the INTADC interrupt is generated or after ADCCR2 <EOCF> becomes "1".

Note 2): In single mode, do not read ADCDRL or ADCDRH during AD conversion (ADCCR2 <ADBF>="1"). (If AD conversion is finished in the interim between a read of ADCDRL and a read of ADCDRH, the INTADC interrupt request is canceled, and the conversion result is lost.)

Note 3): If STOP, IDLE0 or SLOW mode is started, ADCDRL and ADCDRH are initialized to "0".

Note 4): If ADCCR1 <AMD> is set to "00", ADCDRL and ADCDRH are initialized to "0".

Note 5): If an instruction to read ADCDRH is executed, "0" is read from bits 7 through 2.

Note 6): If AD conversion is finished in repeat mode in the interim between a read of ADCDRL and a read of ADCDRH, the previous converted value is retained without overwriting the AD converted value register. In this case, the INTADC interrupt request is canceled, and the conversion result is lost.

## 9.3 Function

The 10-bit AD converter operates in either single mode in which AD conversion is performed only once or repeat mode in which AD conversion is performed repeatedly.

### 9.3.1 Single Mode

In single mode, the voltage at a designated analog input pin is AD converted only once.

Setting ADCCR1 <ADRS> to "1" after setting ADCCR1 <AMD> to "01" allows AD conversion to start. ADCCR1 <ADRS> is automatically cleared after the start of AD conversion. As AD conversion starts, ADCCR2 <ADBF> is set to "1". It is cleared to "0" if AD conversion is finished or if AD conversion is forced to stop.

After AD conversion is finished, the conversion result is stored in the AD converted value registers (ADCDRL and ADCDRH), ADCCR2 <EOCF> is set to "1", and the AD conversion finished interrupt (INTADC) is generated. The AD converted value registers (ADCDRL and ADCDRH) should be usually read according to the INTADC interrupt processing routine. If the upper side (ADCDRH) of the AD converted value register is read, ADCCR2 <EOCF> is cleared to "0".

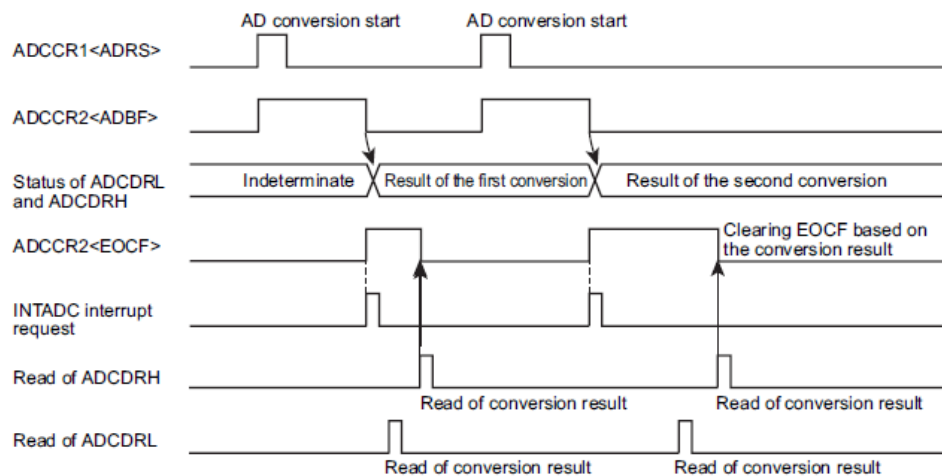


Figure 9.2 Single Mode

*Note:* Do not perform the following operations on the ADCCR1 register when AD conversion is being executed (ADCCR2 <ADBF>="1"). If the following operations are performed, there is the possibility that AD conversion may not be executed properly.

- Changing the ADCCR1<SAIN> setting
- Setting ADCCR1<AINEN> to "0"
- Changing the ADCCR1<AMD> setting (except a forced stop by setting AMD to "00")
- Setting ADCCR1<ADRS> to "1"

### 9.3.2 Repeat Mode

In repeat mode, the voltage at an analog input pin designated at ADCCR1<SAIN> is AD converted repeatedly. Setting ADCCR1 <ADRS> to "1" after setting ADCCR1 <AMD> to "11" allows AD conversion to start.

After the start of AD conversion, ADCCR1 <ADRS> is automatically cleared. After the first AD conversion is finished, the conversion result is stored in the AD converted value registers (ADCDRL and ADCDRH), ADCCR2 <EOCF> is set to "1", and the AD conversion finished interrupt (INTADC) is generated. After this interrupt is generated, the second (next) AD conversion starts immediately.

The AD converted value registers (ADCDRL and ADCDRH) should be read before the next AD conversion is finished. If the next AD conversion is finished in the interim between a read of ADCDRL

and a read of ADCDRH, the previous converted value is retained without overwriting the AD converted value registers (ADCDRL and ADCDRH). In this case, the INTADC interrupt request is not generated, and the conversion result is lost. (See Figure 9.3)

To stop AD conversion, write "00" (AD operation disable) to ADCCR1 <AMD>. As "00" is written to ADCCR1 <AMD>, AD conversion stops immediately. In this case, the converted value is not stored in the AD converted value register. As AD conversion starts, ADCCR2 <ADBF> is set to "1". It is cleared to "0" if "00" is written to AMD.

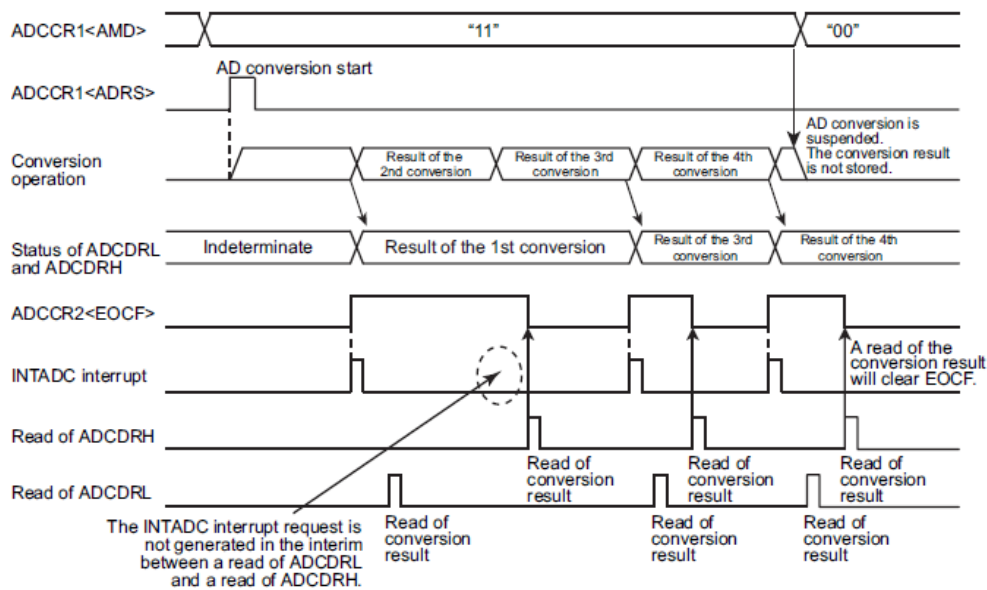


Figure 9.3 Repeat Mode

### 9.3.3 AD Operation Disable and Forced Stop of AD Operation

If you want to force the AD converter to stop when AD conversion is ongoing in single mode or if you want to stop the AD converter when AD conversion is ongoing in repeat mode, set ADCCR1 <AMD> to "00".

If ADCCR1 <AMD> is set to "00", registers ADCCR2 <EOCF>, ADCCR2 <ADBF>, ADCDRL, and ADCDRH are initialized to "0".

## 9.4 Register Setting

- Set the AD converter control register 1 (ADCCR1) as described below:
  - From the AD input channel select (SAIN), select the channel in which AD conversion is to be performed.

2. Set the analog input control (AINEN) to "Analog input enable".
3. At AMD, specify the AD operating mode (single or repeat mode).
2. Set the AD converter control register 2 (ADCCR2) as described below:  
At the AD conversion time (ACK), specify the AD conversion time. For information on how to specify the conversion time, refer to the AD converter control register 2 and Table 9.1.
3. After the above two steps are completed, set "1" on the AD conversion start (ADRS) of the AD converter control register 1 (ADCCR1), and AD conversion starts immediately if single mode is selected.
4. As AD conversion is finished, the AD conversion end flag (EOCF) of the AD converter control register 2 (ADCCR2) is set to "1", the AD conversion result is stored in the AD converted value registers (ADCDRH and ADCDRL), and the INTADC interrupt request is generated.
5. After the conversion result is read from the AD converted value register (ADCDRH), EOCF is cleared to "0". EOCF will also be cleared to "0" if AD conversion is performed once again before reading the AD converted value register (ADCDRH). In this case, the previous conversion result is retained until AD conversion is finished.

## 9.5 Starting STOP/IDLE0/SLOW Modes

If STOP/IDLE0/SLOW mode is started, registers ADCCR1 <ADRS, AMD, AINEN>, ADCCR2 <EOCF, ADBF>, ADCDRL and ADCDRH are initialized to "0". If any of these modes is started during AD conversion, AD conversion is suspended, and the AD converter stops (registers are likewise initialized). When restored from STOP/IDLE0/SLOW mode, AD conversion is not automatically restarted. Therefore, registers must be reconfigured as necessary.

If STOP/IDLE0/SLOW mode is started during AD conversion, analog reference voltage is automatically disconnected and, therefore, there is no possibility of current flowing into the analog reference voltage.

## 9.6 Analog Input Voltage and AD Conversion Result

Analog input voltages correspond to AD-converted, 10-bit digital values, as shown in Figure 9.4.

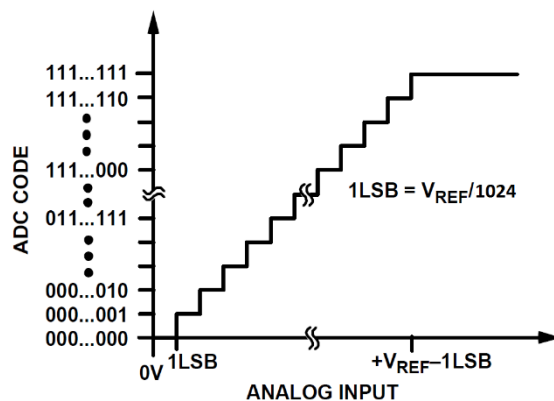


Figure 9.4 Relationships between Analog Input Voltages and AD-converted Values (Typical Values)

## 9.7 Precautions about the AD Converter

### 9.7.1 Analog Input Pin Voltage Range


Analog input pins (AIN0 through AIN9) should be used at voltages from VREF to VSS. If any voltage outside this range is applied to one of the analog input pins, the converted value on that pin becomes uncertain, and converted values on other pins will also be affected.

### 9.7.2 Analog Input Pins Used as Input / Output Ports

Analog input pins (AIN0 through AIN9) are also used as input/output ports. In using one of analog input pins (ports) to execute AD conversion, input/output instructions at all other pins (ports) must not be executed. If they are executed, there is the possibility that the accuracy of AD conversion may deteriorate. This also applies to pins other than analog input pins; if one pin receives inputs or generates outputs, noise may occur and its adjacent pins may be affected by that noise.

### 9.7.3 Noise Countermeasure

The internal equivalent circuit of the analog input pins is shown in Figure 9.5. The higher the output impedance of the analog input source, the more susceptible it becomes to noise. Therefore, make sure the output impedance of the signal source in your design is 5 kΩ or less. It is recommended that a capacitor be attached externally.

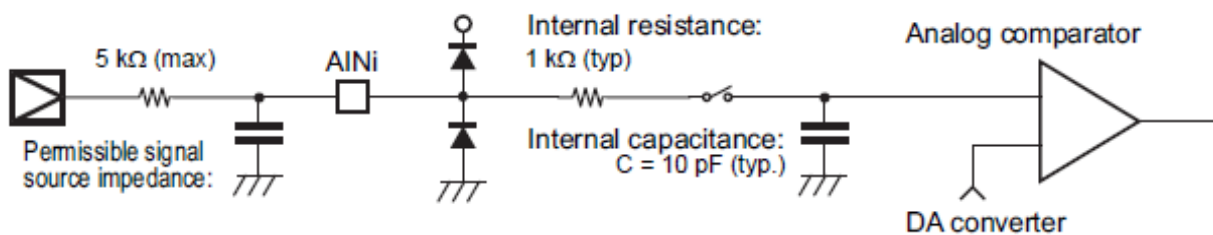

Note):  $i = 8$  to  $0$

Figure 9.5 Analog Input Equivalent Circuit and Example of Input Pin Processing

## 10. Timer / Counter

### 10.1 Watchdog Timer (WDT)

The watchdog timer is a fail-safe system to detect rapidly the CPU malfunctions such as endless loops due to spurious noises or the deadlock conditions, and return the CPU to a system recovery routine.

The watchdog timer signals used for detecting malfunctions can be programmed as watchdog interrupt request signals or watchdog timer reset signals.

*Note): Care must be taken in system designing since the watchdog timer may not fulfill its functions due to disturbing noise and other effects.*

#### 10.1.1 Configuration

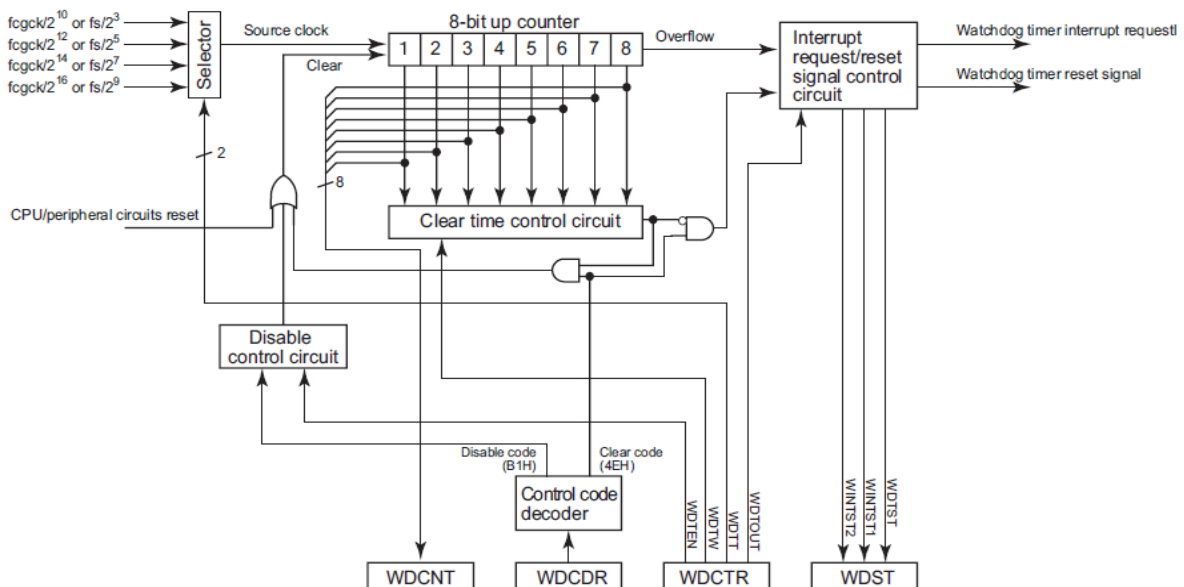


Figure 10.1 Watchdog Timer Configuration

#### 10.1.2 Control

The watchdog timer is controlled by the watchdog timer control register (WDCTR), the watchdog timer control code register (WDCDR), the watchdog timer counter monitor (WDCNT) and the watchdog timer status (WDST).

The watchdog timer is enabled automatically just after the warm-up operation that follows reset is finished.

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

**Watchdog Timer Control Register**

WDCTR (0x0FD4)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	WDTEN	WDTW		WDTT		WDTOUT
Read/Write	R	R	R/W	R/W		R/W		R/W
After reset	1	0	1	0	0	1	1	0

WDTEN	Enable / disable the watch-dog timer	0: Disable 1: Enable			
WDTW	Set the clear time of the 8-bit up counter.	00: The 8-bit up counter is cleared by writing the clear code at any point within the overflow time of the 8-bit up counter. 01: A watchdog timer interrupt request is generated by writing the clear code at a point within the first quarter of the overflow time of the 8-bit up counter. The 8-bit up counter is cleared by writing the clear code after the first quarter of the overflow time has elapsed. 10: A watchdog timer interrupt request is generated by writing the clear code at a point within the first half of the overflow time of the 8-bit up counter. The 8-bit up counter is cleared by writing the clear code after the first half of the overflow time has elapsed. 11: A watchdog timer interrupt request is generated by writing the clear code at a point within the first three quarters of the overflow time of the 8-bit up counter. The 8-bit up counter is cleared by writing the clear code after the first three quarters of the overflow time have elapsed.			
WDTT	Set the overflow time of the 8-bit up counter.		NORMAL mode		SLOW mode
			DV9CK=0	DV9CK=1	
		00:	$2^{18}/fcgck$	$2^{11}/fs$	$2^{11}/fs$
		01:	$2^{20}/fcgck$	$2^{13}/fs$	$2^{13}/fs$
		10:	$2^{22}/fcgck$	$2^{15}/fs$	$2^{15}/fs$
11:	$2^{24}/fcgck$	$2^{17}/fs$	$2^{17}/fs$		
WDTOUT	Select an overflow detection signal of the 8-bit up counter.	0 : Watchdog timer interrupt request signal 1 : Watchdog timer reset request signal			

Note 1): fcgck, Gear clock [Hz]; fs, Low frequency clock [Hz]

Note 2): WDCTR <WDTW>, WDCTR <WDTT> and WDCTR <WDTOUT> cannot be changed when WDCTR <WDTEN> is "1". If WDCTR <WDTEN> is "1", clear WDCTR <WDTEN> to "0" and write the disable code (0xB1) into WDCDR to disable the watchdog timer operation. Note that WDCTR <WDTW>, WDCTR <WDTT> and WDCTR <WDTOUT> can be changed at the same time as setting WDCTR <WDTEN> to "1".

Note 3): Bit 7 and bit 6 of WDCTR are read as "1" and "0" respectively.

**Watchdog Timer Control Code Register**

WDCDR (0x0FD5)	7	6	5	4	3	2	1	0
Bit Symbol	WDTCR2							
Read/Write	W							
After reset	0	0	0	0	0	0	0	0

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

WDTCR2	Write watchdog timer control codes.	0x4E: Clear the watchdog timer. (clear code) 0xB1: Disable the watchdog timer operation and clear the 8-bit up counter when WDCTR <WDTEN> is "0". (disable code) Others: Invalid
--------	-------------------------------------	--

### 8-bit Up Counter Monitor

<b>WDCNT (0x0FD6)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	WDCNT							
Read/Write	R							
After reset	0	0	0	0	0	0	0	0

WDCNT	Monitor the count value of the 8-bit up counter.	The count value of the 8-bit up counter is read.
-------	--	--

### Watchdog Timer Status

<b>WDST (0x0FD7)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	-	-	-	-	-	WINTST2	WINTST1	WDTST
Read/Write	R	R	R	R	R	R	R	R
After reset	0	1	0	1	1	0	0	1

WINTST2	Watchdog timer interrupt request signal factor status 2	0: No watchdog timer interrupt request signal has occurred. 1: A watchdog timer interrupt request signal has occurred due to the overflow of the 8-bit up counter.
WINTST1	Watchdog timer interrupt request signal factor status 1	0: No watchdog timer interrupt request signal has occurred. 1: A watchdog timer interrupt request signal has occurred due to releasing of the 8-bit up counter outside the clear time.
WDTST	Watchdog timer operating state status	0: Operation disabled 1: Operation enabled

Note 1): WDST <WINTST2> and WDST <WINTST1> are cleared to "0" by reading WDST.

Note 2): Values after reset are read from bits 7 to 3 of WDST.

## 10.1.3 Function

The watchdog timer can detect the CPU malfunctions and deadlock by detecting the overflow of the 8-bit up counter and detecting releasing of the 8-bit up counter outside the clear time.

The watchdog timer stoppage and other abnormalities can be detected by reading the count value of the 8-bit up counter at random times and comparing the value to the last read value.

### 10.1.3.1 Setting of Enabling / Disabling the Watchdog Timer Operation

Setting WDCTR <WDTEN> to "1" enables the watchdog timer operation, and the 8-bit up counter


starts counting the source clock.

WDCTR <WDTEN> is initialized to "1" after the warm-up operation that follows reset is released. This means that the watchdog timer is enabled.

To disable the watchdog timer operation, clear WDCTR <WDTEN> to "0" and write 0xB1 into WDCDR. Disabling the watchdog timer operation clears the 8-bit up counter to "0".

*Note): If the overflow of the 8-bit up counter occurs at the same time as 0xB1 (disable code) is written into WDCDR with WDCTR <WDTEN> set at "1", the watchdog timer operation is disabled preferentially and the overflow detection is not executed.*

To re-enable the watchdog timer operation, set WDCTR <WDTEN> to "1". There is no need to write a control code into WDCDR.

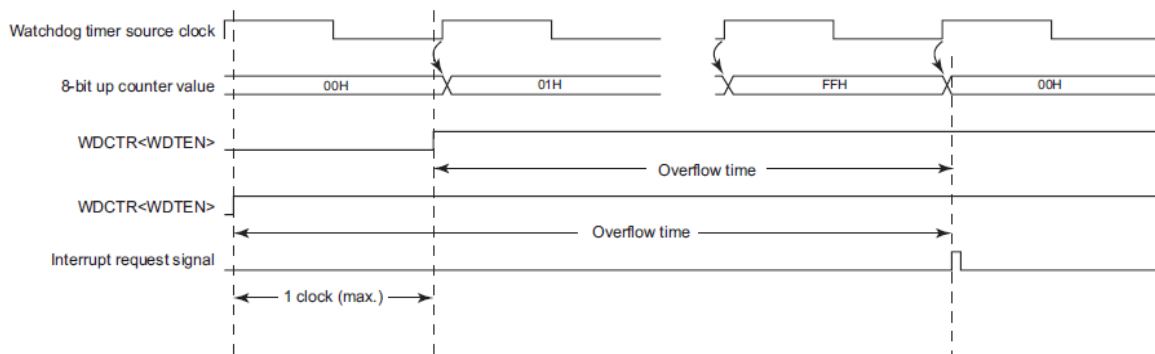

**Figure 10.2 WDCTR <WDTEN> Set Timing and Overflow Time**

*Note): The 8-bit up counter source clock operates out of synchronization with WDCTR <WDTEN>. Therefore, the first overflow time of the 8-bit up counter after WDCTR <WDTEN> is set to "1" may get shorter by a maximum of 1 source clock. The 8-bit up counter must be cleared within the period of the overflow time minus 1 source clock cycle.*

### 10.1.3.2 Setting the Clear Time of the 8-bit Up Counter


WDCTR <WDTW> sets the clear time of the 8-bit up counter.

When WDCTR <WDTW> is "00", the clear time is equal to the overflow time of the 8-bit up counter, and the 8-bit up counter can be cleared at any time.

When WDCTR <WDTW> is not "00", the clear time is fixed to only a certain period within the overflow time of the 8-bit up counter. If the operation for releasing the 8-bit up counter is attempted outside the clear time, a watchdog timer interrupt request signal occurs.

At this time, the watchdog timer is not cleared but continues counting. If the 8-bit up counter is not cleared within the clear time, a watchdog timer reset request signal or a watchdog timer interrupt

request signal occurs due to the overflow, depending on the WDCTR <WDTOUT> setting.

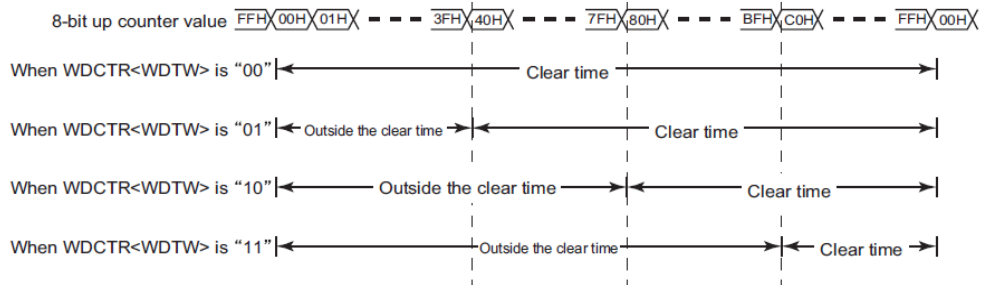

**Figure 10.3 WDCTR <WDTW> and the 8-bit Up Counter Clear Time**

### 10.1.3.3 Setting the Overflow Time of the 8-bit Up Counter

WDCTR <WDTT> sets the overflow time of the 8-bit up counter.

When the 8-bit up counter overflows, a watchdog timer reset request signal or a watchdog timer interrupt request signal occurs, depending on the WDCTR <WDTOUT> setting.

If the watchdog timer interrupt request signal is selected as the malfunction detection signal, the watchdog counter continues counting, even after the overflow has occurred.

The watchdog timer temporarily stops counting up in the STOP mode (including warm-up) or in the IDLE / SLEEP mode, and restarts counting up after the STOP / IDLE / SLEEP mode is released. To prevent the 8-bit up counter from overflowing immediately after the STOP / IDLE / SLEEP mode is released, it is recommended to clear the 8-bit up counter before the operation mode is changed.

WDTT	Watchdog timer overflow time [s]		
	NORMAL mode		SLOW mode
	DV9CK = 0	DV9CK = 1	
00	32.77 m	62.50 m	62.50 m
01	131.1 m	250.0 m	250.0 m
10	524.3 m	1.000	1.000
11	2.097	4.000	4.000

**Table 10.1 Watchdog Timer Overflow Time (fcgck=8.0 MHz; fs=32.768 KHz)**

*Note): The 8-bit up counter source clock operates out of synchronization with WDCTR <WDTEN>. Therefore, the first overflow time of the 8-bit up counter after WDCTR <WDTEN> is set to "1" may get shorter by a maximum of 1 source clock. The 8-bit up counter must be cleared within a period of the overflow time minus 1 source clock cycle.*

### 10.1.3.4 Setting an Overflow Detection Signal of the 8-bit Up Counter

WDCTR <WDTOUT> selects a signal to be generated when the overflow of the 8-bit up counter is

detected.

**(a) When Watchdog Timer Interrupt Request Signal is Selected (as WDCTR <WDTOUT> is "0")**

Releasing WDCTR <WDTOUT> to "0" causes a watchdog timer interrupt request signal to occur when the 8-bit up counter overflows.

A watchdog timer interrupt is a non-maskable interrupt, and its request is always accepted, regardless of the interrupt master enable flag (IMF) setting.

*Note): When a watchdog timer interrupt is generated while another interrupt, including a watchdog timer interrupt, is already accepted, the new watchdog timer interrupt is processed immediately and the preceding interrupt is put on hold. Therefore, if watchdog timer interrupts are generated continuously without execution of the RETN instruction, too many levels of nesting may cause a malfunction of the microcontroller.*

**(b) When Watchdog Timer Reset Request Signal is Selected (as WDCTR <WDTOUT> is "1")**

Setting WDCTR <WDTOUT> to "1" causes a watchdog timer reset request signal to occur when the 8-bit up counter overflows.

This watchdog timer reset request signal resets the MQ8S MCU series IC, and starts the warm-up operation.

### 10.1.3.5 Writing the Watchdog Timer Control Codes

The watchdog timer control codes are written into WDCDR.

By writing 0x4E (clear code) into WDCDR, the 8-bit up counter is cleared to "0" and continues counting the source clock.

When WDCTR <WDTEN> is "0", writing 0xB1 (disable code) into WDCDR disables the watchdog timer operation.

To prevent the 8-bit up counter from overflowing, clear the 8-bit up counter in a period shorter than the overflow time of the 8-bit up counter and within the clear time.

By designing the program so that no overflow will occur, the program malfunctions and deadlock can be detected through interrupts generated by watchdog timer interrupt request signals.

By applying a reset to the microcomputer using watchdog timer reset request signals, the CPU can be restored from malfunctions and deadlock.

### 10.1.3.6 Reading the 8-bit Up Counter

The counter value of the 8-bit up counter can be read by reading WDCNT.

The stoppage of the 8-bit up counter can be detected by reading WDCNT at random times and comparing the value to the last read value.

### 10.1.3.7 Reading the Watchdog Timer Status

The watchdog timer status can be read at WDST.

WDST <WDTST> is set to "1" when the watchdog timer operation is enabled, and it is cleared to "0" when the watchdog timer operation is disabled.

WDST <WINTST2> is set to "1" when a watchdog timer interrupt request signal occurs due to the overflow of the 8-bit up counter.

WDST <WINTST1> is set to "1" when a watchdog timer interrupt request signal occurs due to the operation for releasing the 8-bit up counter outside the clear time.

You can know which factor has caused a watchdog timer interrupt request signal by reading WDST <WINTST2> and WDST <WINTST1> in the watchdog timer interrupt service routine.

WDST <WINTST2> and WDST <WINTST1> are cleared to "0" when WDST is read. If WDST is read at the same time as the condition for turning WDST <WINTST2> or WDST <WINTST1> to "1" is satisfied, WDST <WINTST2> or WDST <WINTST1> is set to "1", rather than being cleared.

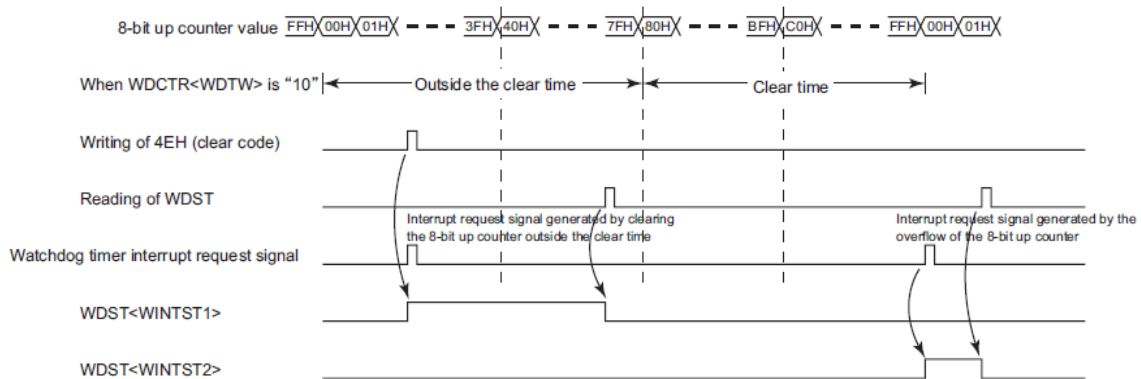


Figure 10.4 Changes in the Watchdog Timer Status

## 10.2 Divider Output (DVOB)

This function outputs approximately 50% duty pulses that can be used to drive the piezoelectric buzzer or other device.

### 10.2.1 Configuration

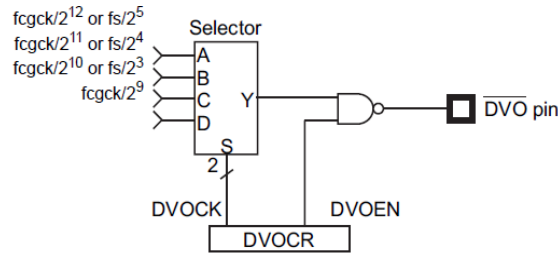


Figure 10.5 Divider Output

### 10.2.2 Control

The divider output is controlled by the divider output control register (DVOCR).

#### Divider Output Control Register

DVOCR (0x0038)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	-	-	DVOEN	DVOCK	
Read/Write	R	R	R	R	R	R/W	R/W	
After reset	0	0	0	0	0	0	0	0

DVOEN	Enable / disable the divider output	0: Disable 1: Enable			
DVOCK	Select the divider output frequency Unit: [Hz]			SLOW 1/2 mode SLEEP 1/2 mode	
			Normal 1/2, IDLE 1/2 mode DV9CK=0	DV9CK=1	
		00:	$fcgck/2^{12}$	$fs/2^5$	$fs/2^5$
		01:	$fcgck/2^{11}$	$fs/2^4$	$fs/2^4$
		10:	$fcgck/2^{10}$	$fs/2^3$	$fs/2^3$
11:	$fcgck/2^9$	Reserved	Reserved		

Note 1):  $fcgck$ : Gear clock [Hz],  $fs$ : Low-frequency clock [Hz]

Note 2):  $DVOCR <DVOEN>$  is cleared to "0" when the operation is switched to STOP or IDLE0/SLEEP0 mode.  $DVOCR <DVOCK>$  holds the value.

Note 3): When  $SYSCR1 <DV9CK>$  is "1" in the NORMAL 1/2 or IDLE 1/2 mode, the DVO frequency is subject to some fluctuations to synchronize  $fs$  and  $fcgck$ .

Note 4): Bits 7 to 3 of  $DVOCR$  are read as "0".

### 10.2.3 Function

Select the divider output frequency at DVOCR <DVOCK>.

The divider output is enabled by setting DVOCR <DVOEN> to "1". Then, the rectangular waves selected by DVOCR <DVOCK> are output from DVOB pin.

It is disabled by clearing DVOCR <DVOEN> to "0". And DVOB pin keeps "H" level.

When the operation is changed to STOP or IDLE0 / SLEEP0 mode, DVOCR <DVOEN> is cleared to "0" and the DVOB pin outputs the "H" level.

The divider output source clock operates, regardless of the value of DVOCR <DVOEN>.

Therefore, the frequency of the first divider output after DVOCR <DVOEN> is set to "1" is not the frequency set at DVOCR <DVOCK>.

When the operation is changed to the software, STOP or IDLE0/SLEEP0 mode is activated and DVOCR <DVOEN> is cleared to "0", the frequency of the divider output is not the frequency set at DVOCR <DVOCK>.

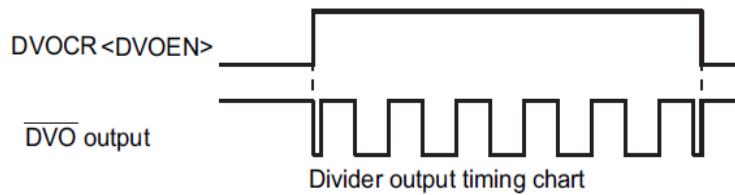


Figure 10.6 Divider Output Timing

When the operation is changed from NORMAL mode to SLOW mode or from SLOW mode to NORMAL mode, the divider output frequency does not reach the expected value due to synchronization of the gear clock (fcgck) and the low-frequency clock (fs).

DVOCK	Divider output frequency [Hz]		
	NORMAL 1/2, IDLE 1/2 mode		SLOW1/2, SLEEP1/2 mode
	DV9CK = 0	DV9CK = 1	
00	1.953 k	1.024 k	1.024 k
01	3.906 k	2.048 k	2.048 k
10	7.813 k	4.096 k	4.096 k
11	15.625 k	Reserved	Reserved

Table 10.2 Divider Output Frequency  
(Example: fcgck = 8.0 MHz, fs = 32.768 kHz)

### 10.3 Time Base Timer (TBT)

The time base timer generates the time base for key scanning, dynamic display and other processes. It also provides a time base timer interrupt (INTTBT) in a certain cycle.

#### 10.3.1 Configuration

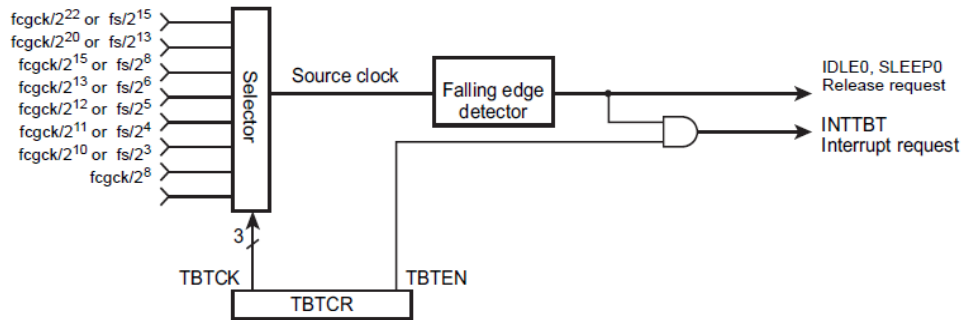


Figure 10.7 Time Base Timer Configuration

#### 10.3.2 Control

The time base timer is controlled by the time base timer control register (TBTCR).

##### Time Base Timer Control Register

TBTCR (0x0039)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	-	TBTEN	TBTC		
Read/Write	R	R	R	R	R/W	R/W		
After reset	0	0	0	0	0	0	0	0

TBTEN	Enable / disable the time base timer interrupt requests.	0: Disable 1: Enable			
TBTC	Select the time base timer interrupt frequency Unit: [Hz]		Normal 1/2, IDLE 1/2 mode		SLOW 1/2 mode
			DV9CK=0	DV9CK=1	SLEEP 1/2 mode
		000:	$fcgck/2^{22}$	$fs/2^{15}$	$fs/2^{15}$
		001:	$fcgck/2^{20}$	$fs/2^{13}$	$fs/2^{13}$
		010:	$fcgck/2^{15}$	$fs/2^8$	Reserved
		011:	$fcgck/2^{13}$	$fs/2^6$	Reserved
		100:	$fcgck/2^{12}$	$fs/2^5$	Reserved
		101:	$fcgck/2^{11}$	$fs/2^4$	Reserved
		110:	$fcgck/2^{10}$	$fs/2^3$	Reserved
111:	$fcgck/2^8$	Reserved	Reserved		

Note 1):  $fcgck$ : Gear clock [Hz],  $fs$ : Low-frequency clock [Hz]

Note 2): When the operation is changed to the STOP mode, TBTCR <TBTEN> is cleared to "0" and TBTCR <TBTC> maintains the value.

Note 3): TBTCR <TBTC> should be set when TBTCR <TBTEN> is "0".

Note 4): When SYSCR1 <DV9CK> is "1" in the NORMAL 1/2 or IDLE1/2 mode, the interrupt request is subject to some fluctuations to synchronize fs and fcgck.

Note 5): Bits 7 to 4 of TBTCR are read as "0".

### 10.3.3 Function

Select the source clock frequency for the time base timer by TBTCR <TBTK>. TBTCR <TBTK> should be changed when TBTCR <TBTEN> is "0". Otherwise, the INTTBT interrupt request is generated at unexpected timing.

Setting TBTCR <TBTEN> to "1" causes interrupt request signals to occur at the falling edge of the source clock. When TBTCR <TBTEN> is cleared to "0", no interrupt request signal will occur.

When the operation is changed to the STOP mode, TBTCR <TBTEN> is cleared to "0". The source clock of the time base timer operates regardless of the TBTCR <TBTEN> value.

A time base timer interrupt is generated at the first falling edge of the source clock after a time base timer interrupt request is enabled. Therefore, the period from the time TBTCR <TBTEN> is set to "1" to the time the first interrupt request occurs is shorter than the frequency period set at TBTCR <TBTK>.

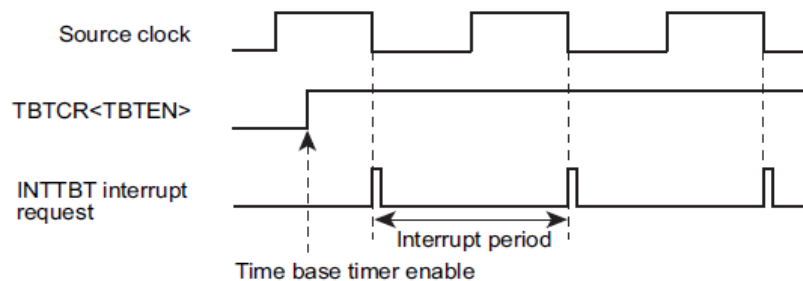


Figure 10.8 Time Base Timer Interrupt

When the operation is changed from NORMAL mode to SLOW mode or from SLOW mode to NORMAL mode, the interrupt request will not occur at the expected timing due to synchronization of the gear clock (fcgck) and the low-frequency clock (fs). It is recommended that the operation mode is changed when TBTCR <TBTEN> is "0".

TBTCK	Time base timer interrupt frequency [Hz]		
	NORMAL1/2, IDLE1/2 mode	NORMAL1/2, IDLE1/2 mode	SLOW1/2, SLEEP1/2 mode
	DV9CK = 0	DV9CK = 1	
000	1.91	1	1
001	7.63	4	4
010	244.14	128	Reserved
011	976.56	512	Reserved
100	1953.13	1024	Reserved
101	3906.25	2048	Reserved
110	7812.5	4096	Reserved
111	31250	Reserved	Reserved


**Table 10.3 Time Base Timer Interrupt Frequency**  
(Example: fcgck = 8.0 MHz, fs = 32.768 kHz)

## 10.4 Real Time Clock (RTC)

The real time clock is a function that generates interrupt requests at certain intervals using the low-frequency clock.

The number of interrupts is counted by the software to realize the clock function. The real time clock can be used only in the operation modes where the low-frequency clock oscillates, except for SLEEP0.

### 10.4.1 Configuration

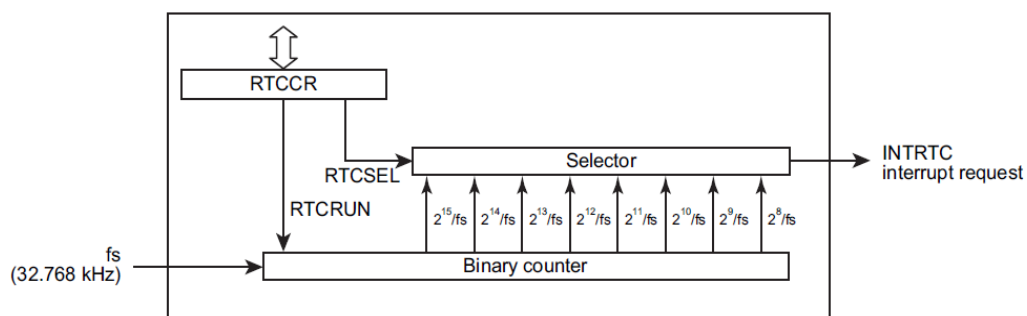

**Figure 10.9 Real Time Clock**

### 10.4.2 Control

The real time clock is controlled by following registers.

### Low Power Consumption Register 2

POFFCR2 (0x0F76)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	RTCEN	-	-	-	-	SIO0EN
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

RTCEN	RTC control	0: Disable 1: Enable
SIO0EN	SIO0 control	0: Disable 1: Enable

### Real Time Clock Control Register

RTCCR (0x0FC8)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	-	RTCSEL			RTCRUN
Read/Write	R	R	R	R	R/W			R/W
After reset	0	0	0	0	0	0	0	0

RTCSEL	Selectstheinterruptgenerationinterval	000: $2^{15}/f_s(1.000[s]@f_s=32.768kHz)$ 001: $2^{14}/f_s(0.500[s]@f_s=32.768kHz)$ 010: $2^{13}/f_s(0.250[s]@f_s=32.768kHz)$ 011: $2^{12}/f_s(125.0[ms]@f_s=32.768kHz)$ 100: $2^{11}/f_s(62.50[ms]@f_s=32.768kHz)$ 101: $2^{10}/f_s(31.25[ms]@f_s=32.768kHz)$ 110: $2^9/f_s(15.62[ms]@f_s=32.768kHz)$ 111: $2^8/f_s(7.81[ms]@f_s=32.768kHz)$
RTCRUN	Enables/disablestherealtimeclockoperation	0: Disable 1: Enable

Note 1):  $f_s$ : Low-frequency clock [Hz]

Note 2): RTCCR <RTCSEL> can be rewritten only when RTCCR <RTCRUN> is "0". If data is written into RTCCR <RTCSEL> when RTCCR <RTCRUN> is "1", the existing data remains effective. RTCCR <RTCSEL> can be rewritten at the same time as enabling the real time clock, but it cannot be rewritten at the same time as disabling the real time clock.

Note 3): If the real time clock is enabled and when 1) SYSCR2 <XTEN> is cleared to "0" to stop the low-frequency clock oscillation circuit or 2) the operation is changed to the STOP mode or the SLEEP0 mode, the data in RTCCR <RTCSEL> is maintained and RTCCR <RTCRUN> is cleared to "0".

## 10.4.3 Function

### 10.4.3.1 Low Power Consumption Function

Real time clock has the low power consumption registers (POFFCR2) that save power when the real time clock is not being used. Setting POFFCR2 <RTCEN> to "0" disables the basic clock supply to real time clock to save power. Note that this renders the real time clock unusable. Setting POFFCR2 <RTCEN> to "1" enables the basic clock supply to real time clock and allows the real time clock to operate.

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

After reset, POFFCR2 <RTCEN> are initialized to "0", and this renders the real time clock unusable. When using the real time clock for the first time, be sure to set POFFCR2 <RTCEN> to "1" in the initial setting of the program (before the real time clock control registers are operated).

Do not change POFFCR2 <RTCEN> to "0" during the real time clock operation. Otherwise real time clock may operate unexpectedly.

#### 10.4.3.2 Enabling / Disabling the Real Time Clock Operation

Setting RTCCR <RTCRUN> to "1" enables the real time clock operation. Setting RTCCR <RTCRUN> to "0" disables the real time clock operation. RTCCR <RTCRUN> is cleared to "0" just after reset release.

#### 10.4.3.3 Selecting the Interrupt Generation Interval

The interrupt generation interval can be selected at RTCCR <RTCSEL>. RTCCR <RTCSEL> can be rewritten only when RTCCR <RTCRUN> is "0". If data is written into RTCCR <RTCSEL> when RTCCR <RTCRUN> is "1", the existing data remains effective.

RTCCR <RTCSEL> can be rewritten at the same time as enabling the real time clock operation, but it cannot be re-written at the same time as disabling the real time clock operation.

### 10.4.4 Real Time Clock Operation

#### 10.4.4.1 Enabling the Real Time Clock Operation

Set the interrupt generation interval to RTCCR <RTCSEL>, and at the same time, set RTCCR <RTCRUN> to "1". When RTCCR <RTCRUN> is set to "1", the binary counter for the real time clock starts counting of the low-frequency clock. When the interrupt generation interval selected at RTCCR <RTCSEL> is reached, a real time clock interrupt request (INTRTC) is generated and the counter continues counting.

#### 10.4.4.2 Disabling the Real Time Clock Operation

Clear RTCCR <RTCRUN> to "0". When RTCCR <RTCRUN> is cleared to "0", the binary counter for the real time clock is cleared to "0" and stops counting of the low-frequency clock.

## 10.5 8-bit Timer Counters

MQ6905 contains 4 channels of high-performance 8-bit timer counters 00, 01, 02 and 03 (TC0). Each timer can be used for time measurement and pulse output with a prescribed width. Two 8-bit timer counters are cascadable to form a 16-bit timer.

This chapter describes 2 channels of 8-bit timer counters 00 and 01. For 8-bit timer counters 02 and 03, replace the SFR addresses and pin names as shown in Table 10.4 and Table 10.5.

	16-bit mode	T0xREG (Address)	T0xPWM (Address)	T0xMOD (Address)	T0xxCR (Address)	Low power consumption register
Timer counter 00	Lower	T00REG (0x0026)	T00PWM (0x0028)	T00MOD (0x002A)	T001CR (0x002C)	POFFCR0 <TC001EN>
Timer counter 01	Higher	T01REG (0x0027)	T01PWM (0x0029)	T01MOD (0x002B)		
Timer counter 02	Lower	T02REG (0x0F88)	T02PWM (0x0F8A)	T02MOD (0x0F8C)	T023CR (0x0F8E)	POFFCR0 <TC023EN>
Timer counter 03	Higher	T03REG (0x0F89)	T03PWM (0x0F8B)	T03MOD (0x0F8D)		

**Table 10.4 SFR Address Assignment**

	Timer Input Pin	PWM Output Pin	PPG Output Pin
Timer counter 00	TC00 pin	PWM00B pin	PPG00B pin
Timer counter 01	TC01 pin	PWM01B pin	PPG01B pin
Timer counter 02	TC02 pin	PWM02B pin	PPG02B pin
Timer counter 03	TC03 pin	PWM03B pin	PPG03B pin

**Table 10.5 Pin Names**

### 10.5.1 Control

#### 10.5.1.1 Timer Counter 00

The timer counter 00 is controlled by the timer counter 00 mode register (T00MOD) and two 8-bit timer registers (T00REG and T00PWM).

##### Timer Register 00

T00REG (0x0026)	15	14	13	12	11	10	9	8
Bit Symbol	T00REG							
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	1	1	1	1	1	1	1	1

**Timer Register 00**

T00PWM (0x0028)	7	6	5	4	3	2	1	0
Bit Symbol	T00PWM							
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	1	1	1	1	1	1	1	1

*Note): For the configuration of T00PWM in the 8-bit and 12-bit PWM modes, refer to "10.5.3.3 8-bit pulse width modulation (PWM) output mode" and "10.5.3.7 12-bit pulse width modulation (PWM) output mode".*

**Timer Counter 00 Mode Register**

T00MOD (0x002A)	7	6	5	4	3	2	1	0
Bit Symbol	TFF0	DBE0	TCK0			EIN0	TCM0	
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	1	1	0	0	0	0	0	0

TFF0	Timer F/F0 control	0: Clear 1: Set																																							
DBE0	Double buffer control	0: Disable the double buffer 1: Enable the double buffer																																							
TCK0	Operation clock selection	<table border="1" style="width:100%; border-collapse: collapse; text-align: center;"> <tr> <td></td> <td colspan="2">Normal 1/2, IDLE 1/2 mode</td> <td rowspan="2">SLOW 1/2 mode SLEEP 1 mode</td> </tr> <tr> <td></td> <td>SYSCR1 &lt;DV9CK&gt;=0</td> <td>SYSCR1 &lt;DV9CK&gt;=1</td> </tr> <tr> <td>000:</td> <td><math>fcgck/2^{11}</math></td> <td><math>fs/2^4</math></td> <td><math>fs/2^4</math></td> </tr> <tr> <td>001:</td> <td><math>fcgck/2^{10}</math></td> <td><math>fs/2^3</math></td> <td><math>fs/2^3</math></td> </tr> <tr> <td>010:</td> <td><math>fcgck/2^8</math></td> <td><math>fcgck/2^8</math></td> <td>-</td> </tr> <tr> <td>011:</td> <td><math>fcgck/2^6</math></td> <td><math>fcgck/2^6</math></td> <td>-</td> </tr> <tr> <td>100:</td> <td><math>fcgck/2^4</math></td> <td><math>fcgck/2^4</math></td> <td>-</td> </tr> <tr> <td>101:</td> <td><math>fcgck/2^2</math></td> <td><math>fcgck/2^2</math></td> <td>-</td> </tr> <tr> <td>110:</td> <td><math>fcgck/2</math></td> <td><math>fcgck/2</math></td> <td>-</td> </tr> <tr> <td>111:</td> <td><math>fcgck</math></td> <td><math>fcgck</math></td> <td><math>fs/2^2</math></td> </tr> </table>		Normal 1/2, IDLE 1/2 mode		SLOW 1/2 mode SLEEP 1 mode		SYSCR1 <DV9CK>=0	SYSCR1 <DV9CK>=1	000:	$fcgck/2^{11}$	$fs/2^4$	$fs/2^4$	001:	$fcgck/2^{10}$	$fs/2^3$	$fs/2^3$	010:	$fcgck/2^8$	$fcgck/2^8$	-	011:	$fcgck/2^6$	$fcgck/2^6$	-	100:	$fcgck/2^4$	$fcgck/2^4$	-	101:	$fcgck/2^2$	$fcgck/2^2$	-	110:	$fcgck/2$	$fcgck/2$	-	111:	$fcgck$	$fcgck$	$fs/2^2$
			Normal 1/2, IDLE 1/2 mode		SLOW 1/2 mode SLEEP 1 mode																																				
			SYSCR1 <DV9CK>=0	SYSCR1 <DV9CK>=1																																					
		000:	$fcgck/2^{11}$	$fs/2^4$	$fs/2^4$																																				
		001:	$fcgck/2^{10}$	$fs/2^3$	$fs/2^3$																																				
		010:	$fcgck/2^8$	$fcgck/2^8$	-																																				
		011:	$fcgck/2^6$	$fcgck/2^6$	-																																				
		100:	$fcgck/2^4$	$fcgck/2^4$	-																																				
101:	$fcgck/2^2$	$fcgck/2^2$	-																																						
110:	$fcgck/2$	$fcgck/2$	-																																						
111:	$fcgck$	$fcgck$	$fs/2^2$																																						
EIN0	Selection for using external source clock	0: Select the internal clock as the source clock. 1: Select an external clock as the source clock. (the falling edge of the TC00 pin)																																							
TCM0	Operation mode selection	00: 8-bit timer / event counter modes																																							
		01: 8-bit timer / event counter modes																																							
		10: 8-bit pulse width modulation output (PWM) mode																																							
		11: 8-bit programmable pulse generate (PPG) mode																																							

*Note 1): fcgck: Gear clock [Hz], fs: Low-frequency clock [Hz]*

*Note 2): Set T00MOD while the timer is stopped. Writing data into T00MOD is invalid during the timer operation.*

*Note 3): In the 8-bit timer/event modes, the TFF0 setting is invalid. In this mode, when the PWM00B and PPG0B pins are set as the function output pins in the port setting, the pins always output the "H" level.*

*Note 4): When EIN0 is set to "1" and the external clock input is selected as the source clock, the TCK0 setting is ignored.*

*Note 5): When the T001CR <TCAS> bit is "1", timer 00 operates in the 16-bit mode. The T00MOD setting is invalid and timer 00 cannot be used independently in this mode. When the PWM00B and PPG0B pins are set to the function output pins in the port setting, the pins always output the "H" level.*

*Note 6): When the 16-bit mode is selected at T001CR <TCAS>, the timer start is controlled at T001CR <T01RUN>. Timer 00 is*

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

not started by writing data into T001CR <T00RUN>.

### 10.5.1.2 Timer Counter 01

Timer counter 01 is controlled by timer counter 01 mode register (T01MOD) and two 8-bit timer registers (T01REG and T01PWM).

#### Timer Register 01

T01REG (0x0027)	15	14	13	12	11	10	9	8
Bit Symbol	T01REG							
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	1	1	1	1	1	1	1	1

#### Timer Register 01

T01PWM (0x0029)	7	6	5	4	3	2	1	0
Bit Symbol	T01PWM							
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	1	1	1	1	1	1	1	1

Note): For the configuration of T01PWM in the 8-bit and 12-bit PWM modes, refer to "10.5.3.3 8-bit pulse width modulation (PWM) output mode" and "10.5.3.7 12-bit pulse width modulation (PWM) output mode".

#### Timer Counter 01 Mode Register

T01MOD (0x002B)	7	6	5	4	3	2	1	0
Bit Symbol	TFF1	DBE1	TCK1			EIN1	TCM1	
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	1	1	0	0	0	0	0	0

TFF1	Timer F/F1 control	0: Clear 1: Set			
DBE1	Double buffer control	0: Disable the double buffer 1: Enable the double buffer			
TCK1	Operation clock selection		Normal 1/2, IDLE 1/2 mode		SLOW 1/2 mode SLEEP 1 mode
			SYSCR1 <DV9CK>=0	SYSCR1 <DV9CK>=1	
		000:	$fcgck/2^{11}$	$fs/2^4$	$fs/2^4$
		001:	$fcgck/2^{10}$	$fs/2^3$	$fs/2^3$
		010:	$fcgck/2^8$	$fcgck/2^8$	-
		011:	$fcgck/2^6$	$fcgck/2^6$	-
		100:	$fcgck/2^4$	$fcgck/2^4$	-
		101:	$fcgck/2^2$	$fcgck/2^2$	-
110:	$fcgck/2$	$fcgck/2$	-		
111:	$fcgck$	$fcgck$	$fs/2^2$		
EIN1	Selection for using external source clock	0: Select the internal clock as the source clock. 1: Select an external clock as the source clock. (the falling edge of the TC01 pin)			
TCM1	Operation mode selection	T001CR <TCAS>="0" (8-bitmode)		T001CR <TCAS>="1" (16-bitmode)	

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

	00:	8-bit timer/event counter modes	16-bit timer/event counter modes
	01:	8-bit timer/event counter modes	16-bit timer/event counter modes
	10:	8-bit pulse width modulation output (PWM) mode	12-bit pulse width modulation output (PWM) mode
	11:	8-bit programmable pulse generate (PPG) mode	16-bit programmable pulse generate (PPG) mode

Note 1): *fcgck*: Gear clock [Hz], *fs*: Low-frequency clock [Hz]

Note 2): Set *T01MOD* while the timer is stopped. Writing data into *T01MOD* is invalid during the timer operation.

Note 3): In the 8-bit timer/event modes, the *TFF1* setting is invalid. In this mode, when the *PWM1B* and *PPG1B* pins are set as the function output pins in the port setting, the pins always output the "H" level.

Note 4): When *EIN1* is set to "1" and the external clock input is selected as the source clock, the *TCK1* setting is ignored.

### 10.5.1.3 Common to Timer Counters 00 and 01

Timer counters 00 and 01 have the low power consumption register (POFFCR0) and timer 00 and 01 control registers in common.

#### Low Power Consumption Register 0

POFFCR0 (0x0F74)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	TC023EN	TC001EN	-	TCC0EN	TCA1EN	TCA0EN
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

TC023EN	TC02, 03 control	0: Disable 1: Enable
TC001EN	TC00, 01 control	0: Disable 1: Enable
TCC0EN	TCC0 control	0: Disable 1: Enable
TCA1EN	TCA1 control	0: Disable 1: Enable
TCA0EN	TCA0 control	0: Disable 1: Enable

#### Timer 00 and 01 Control Register

T001CR (0x002C)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	-	OUTAND	TCAS	T01RUN	T00RUN
Read/Write	R	R	R	R	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

OUTAND	Timer 00 and 01 output control	0: Output the timer 00 output from the <i>PWM00B</i> and <i>PPG0B</i> pins and the timer 01 output from the <i>PWM1B</i> and <i>PPG1B</i> pins. 1: Output a pulse that is a logical ANDed product of the outputs of timer 00 and 01 from the <i>PWM1B</i> and <i>PPG1B</i> pins.
TCA0EN	Timer 00 and 01 cascade control	0: Use timer 00 and 01 independently (8-bit mode) 1: Cascade timer 00 and 01 (16-bit mode)

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

T01RUN	Timer 01 control Timer 00/01 control (16-bit mode)	0: Stop and clear the timer 1: Start
T00RUN	Timer 00 control	0: Stop and clear the timer 1: Start

Note 1): When STOP mode is started, T00RUN and T01RUN are cleared to "0" and the timers stop. Set T001CR again to use timers 00 and 01 after STOP mode is released.

Note 2): When a read instruction is executed on T001CR, bits 7 to 4 are read as "0".

Note 3): When OUTAND is "1", output is obtained from the PWM1B and PPG1B pins only. There is no timer output to the PWM00B and PPG0B pins. If the PWM00B and PPG0B pins are set as the function output pins in the port setting, the pins always output "H".

Note 4): OUTAND and TCAS can be changed only when both TC01RUN and TC00RUN are "0". When either TC01RUN or TC00RUN is "1" or both are "1", the register values remain unchanged by executing write instructions on OUTAND and TCAS. OUTAND and TCAS can be changed at the same time as TC01RUN and TC00RUN are changed from "0" to "1".

#### 10.5.1.4 Operation Modes and Usable Source Clocks

TCK0		000	001	010	011	100	101	110	111	TC0i pin input
Operation mode		fcgck/2 <sup>11</sup> or fs/2 <sup>4</sup>	fcgck/2 <sup>10</sup> or fs/2 <sup>3</sup>	fcgck/2 <sup>9</sup>	fcgck/2 <sup>8</sup>	fcgck/2 <sup>4</sup>	fcgck/2 <sup>2</sup>	fcgck/2	fcgck	
8-bit timer modes	8-bit timer	○	○	○	○	○	○	○	○	-
	8-bit event counter	-	-	-	-	-	-	-	-	○
	8-bit PWM	○	○	○	○	○	○	○	○	-
	8-bit PPG	○	○	○	○	○	○	○	○	-
16-bit timer modes	16-bit timer	○	○	○	○	○	○	○	○	-
	16-bit event counter	-	-	-	-	-	-	-	-	○
	12-bit PWM	○	○	○	○	○	○	○	○	○
	16-bit PPG	○	○	○	○	○	○	○	○	○

Table 10.6 Operation Modes and Usable Source Clocks (NORMAL 1/2 and IDLE 1/2 Modes)

The operation modes of the 8-bit timers and the usable source clocks are listed below.

Note 1): ○: Usable, -: Unusable

Note 2): Set the source clock in the 16-bit modes on the TC01 side (TCK1).

Note 3): When the low-frequency clock, fs, is not oscillating, it must not be selected as the source clock. If fs is selected when it is not oscillating, no source clock is supplied to the timer, and the timer remains stopped.

Note 4): i=0, 1 (i=0 only in the 16-bit modes)

TCK0		000	001	010	011	100	101	110	111	TC0i
Operation mode		fs/2 <sup>4</sup>	fs/2 <sup>3</sup>	-	-	-	-	-	fs/2 <sup>2</sup>	pin input
8-bit timer modes	8-bit timer	0	0	-	-	-	-	-	0	-
	8-bit event counter	-	-	-	-	-	-	-	-	0
	8-bit PWM	0	0	-	-	-	-	-	0	-
	8-bit PPG	0	0	-	-	-	-	-	0	-
16-bit timer modes	16-bit timer	0	0	-	-	-	-	-	0	-
	16-bit event counter	-	-	-	-	-	-	-	-	0
	12-bit PWM	0	0	-	-	-	-	-	0	0
	16-bit PPG	0	0	-	-	-	-	-	0	0

**Table 10.7 Operation Modes and Usable Source Clocks (SLOW1/2 and SLEEP1 Modes)**

*Note 1): 0: Usable, -: Unusable*

*Note 2): Set the source clock in the 16-bit modes on the TC01 side (TCK1).*

*Note 3): i=0, 1 (i=0 only in the 16-bit modes)*

## 10.5.2 Low Power Consumption Function

Timer counters 00 and 01 have the low power consumption registers (POFFCR0) that save power when the timers are not used. Setting POFFCR0 <TC001EN> to "0" disables the basic clock supply to timer counters 00 and 01 to save power. Note that this renders the timers unusable. Setting POFFCR0 <TC001EN> to "1" enables the basic clock supply to timer counters 00 and 01 and allows the timers to operate.

After reset, POFFCR0 <TC001EN> are initialized to "0", and this makes the timers unusable. When using the timers for the first time, be sure to set POFFCR0 <TC001EN> to "1" in the initial setting of the program (before the timer control registers are operated).

Do not change POFFCR0 <TC001EN> to "0" during the timer operation. Otherwise timer counters 00 and 01 may operate unexpectedly.

## 10.5.3 Function

Timer counters TC00 and TC01 have 8-bit modes in which they are used independently and 16-bit modes in which they are cascaded. (The same to TC02 and TC03)

The 8-bit modes include four operation modes: 8-bit timer mode, 8-bit event counter mode, 8-bit pulse width modulation output (PWM) mode and 8-bit programmable pulse generated output (PPG) mode.

The 16-bit modes include four operation modes: the 16-bit timer mode, the 16-bit event counter mode, the 12-bit PWM mode and the 16-bit PPG mode.

### 10.5.3.1 8-bit Timer Mode

In the 8-bit timer mode, the up counter counts up using the internal clock, and interrupts can be generated regularly at specified times. The operation of TC00 is described below, and the same applies to the operation of TC01, TC02 and TC03. (Replace TC00- by TC01-, TC02- or TC03-).

#### (a) Setting

TC00 is put into the 8-bit timer mode by setting T00MOD <TCM0> to "00" or "01", T001CR <TCAS> to "0" and T00MOD <EIN0> to "0". Select the source clock at T00MOD <TCK0>. Set the count value to be used for the match detection as an 8-bit value at the timer register T00REG.

Set T00MOD <DBE0> to "1" to use the double buffer.

Setting T001CR <T00RUN> to "1" starts the operation. After the timer is started, writing to T00MOD becomes invalid. Be sure to complete the required mode settings before starting the timer.

#### (b) Operation

Setting T001CR <T00RUN> to "1" allows the 8-bit up counter to increment based on the selected internal source clock. When a match between the up counter value and the T00REG set value is detected, an INTTC00 interrupt request is generated and the up counter is cleared to "0x00". After being cleared, the up counter restarts counting. Setting T001CR <T00RUN> to "0" during the timer operation makes the up counter stop counting and be cleared to "0x00".

#### (c) Double Buffer

The double buffer can be used for T00REG by setting T00MOD <DBE0>. The double buffer is disabled by setting T00MOD <DBE0> to "0" or enabled by setting T00MOD <DBE0> to "1".

##### 1. When the Double Buffer is Enabled

When a write instruction is executed on T00REG during the timer operation, the set value is initially stored in the double buffer, and T00REG is not immediately updated. T00REG compares the previous set value with the up counter value. When the values match, an INTTC00 interrupt request is generated and the double buffer set value is stored in T00REG. Subsequently, the match detection is executed using a new set value.

When a write instruction is executed on T00REG while the timer is stopped, the set value is immediately stored in both the double buffer and T00REG.

##### 2. When the Double Buffer is Disabled

When a write instruction is executed on T00REG during the timer operation, the set value is immediately stored in T00REG. Subsequently, the match detection is executed using a new set value.

If the value set to T00REG is smaller than the up counter value, the match detection is

executed using a new set value after the up counter overflows. Therefore, the interrupt request interval may be longer than the selected time. If the value set to T00REG is equal to the up counter value, the match detection is executed immediately after data is written into T00REG. Therefore, the interrupt request interval may not be an integral multiple of the source clock (Figure 10.11). If these are problems, enable the double buffer.

When a write instruction is executed on T00REG while the timer is stopped, the set value is immediately stored in T00REG.

When a read instruction is executed on T00REG, the last value written into T00REG is read out, regardless of the T00MOD <DBE0> setting.

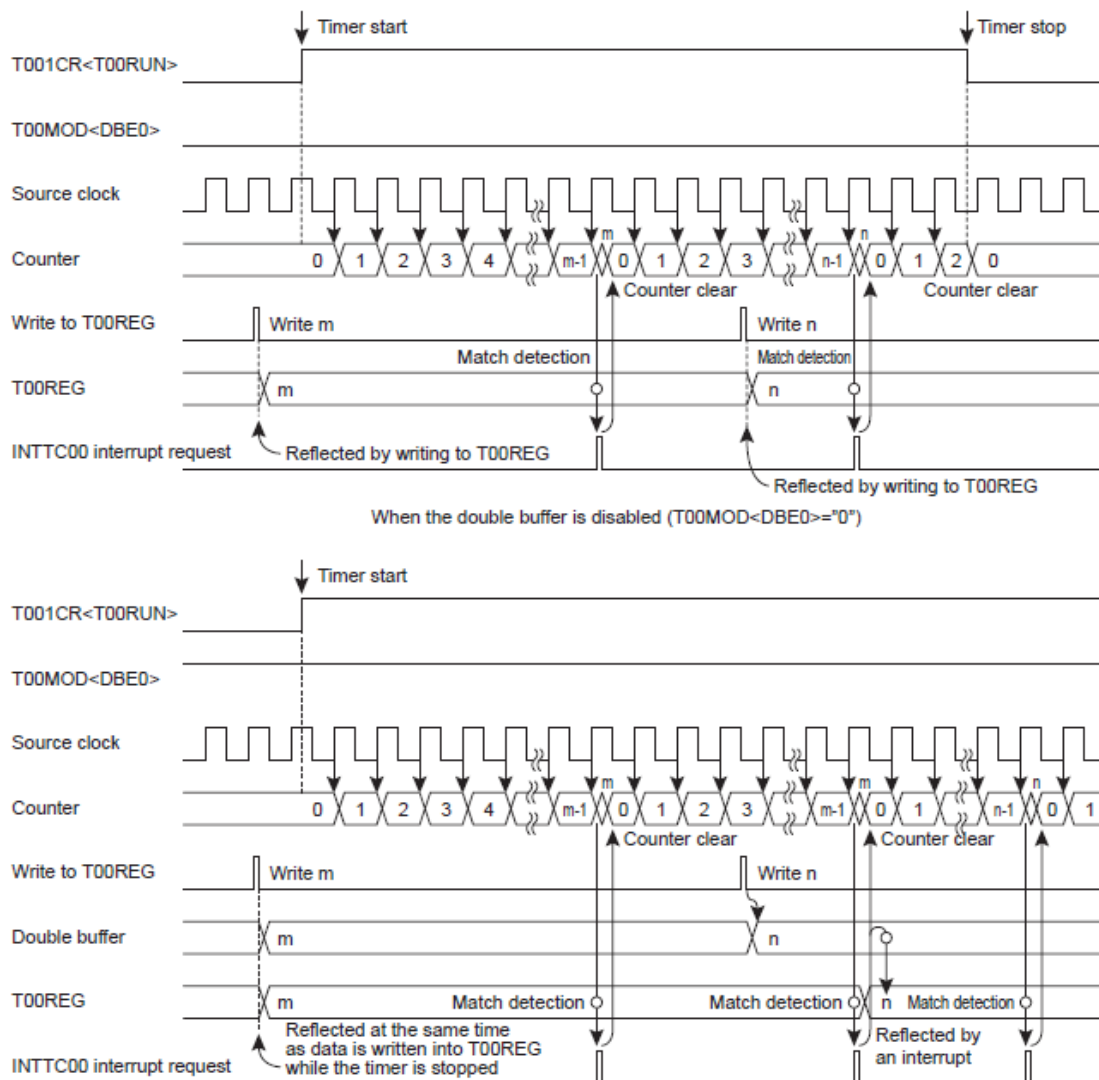


Figure 10.10 Timer Mode Timing Chart

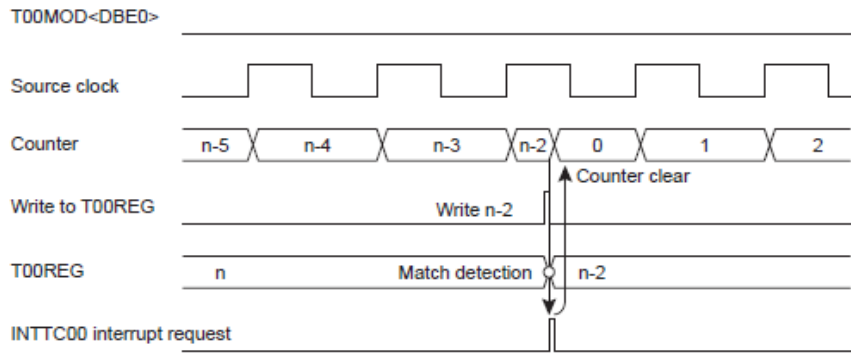


Figure 10.11 Operation When T00REG and the Up Counter Have the Same Value

T00MOD <TCK0>	Source clock [Hz]			Resolution		Maximum time setting	
	NORMAL 1/2 or IDLE 1/2 mode		SLOW 1/2 or SLEEP 1 mode	fcgck=8MHz	fs=32.768KHz	fcgck=8MHz	fs=32.768KHz
	SYSCR1<DV9CK> = "0"	SYSCR1<DV9CK> = "1"					
000	$fcgck/2^{11}$	$fs/2^4$	$fs/2^4$	256us	488.2us	65.2ms	124.5ms
001	$fcgck/2^{10}$	$fs/2^3$	$fs/2^3$	128us	244.1us	32.6ms	62.3ms
010	$fcgck/2^8$	$fcgck/2^8$	-	32us	-	8.2ms	-
011	$fcgck/2^6$	$fcgck/2^6$	-	8us	-	2.0ms	-
100	$fcgck/2^4$	$fcgck/2^4$	-	2us	-	510us	-
101	$fcgck/2^2$	$fcgck/2^2$	-	500ns	-	127.5us	-
110	$fcgck/2$	$fcgck/2$	-	250ns	-	63.8us	-
111	$fcgck$	$fcgck$	$fs/2^2$	125ns	122.1us	31.9us	31.1ms

Table 10.8 8-bit Timer Mode Resolution and Maximum Time Setting

### 10.5.3.2 8-bit Event Counter Mode

In the 8-bit event counter mode, the up counter counts up at the falling edge of the input to the TC00 or TC01 pin (and similarly, TC02 or TC03 pin). The operation of TC00 is described below, and the same applies to the operation of TC01, TC02 and TC03.

#### (a) Setting

Set the count value to be used for the match detection as an 8-bit value at the timer register T00REG. TC00 is put into the 8-bit event counter mode by setting T00MOD <TCM0> to "00", T001CR <TCAS> to "0" and T00MOD <EIN0> to "1". Set the count value to be used for the match detection as an 8-bit value at the timer register T00REG.


Set T00MOD <DBE0> to "1" to use the double buffer.

Setting T001CR <T00RUN> to "1" starts the operation. After the timer is started, writing to T00MOD becomes invalid. Be sure to complete the required mode settings before starting the timer.

**(b) Operation**

Setting T001CR <T00RUN> to "1" allows the 8-bit up counter to increment at the falling edge of the TC00 pin. When a match between the up counter value and the T00REG set value is detected, an INTTC00 interrupt request is generated and the up counter is cleared to "0x00". After being cleared, the up counter restarts counting. Setting T001CR <T00RUN> to "0" during the timer operation makes the up counter stop counting and be cleared to "0x00".

The maximum frequency to be supplied is  $fcgck/2^2$  [Hz] (in NORMAL1/2 or IDLE1/2 mode) or  $fs/2^4$  [Hz] (in SLOW1/2 or SLEEP1 mode), and a pulse width of two machine cycles or more is required at both the "H" and "L" levels.

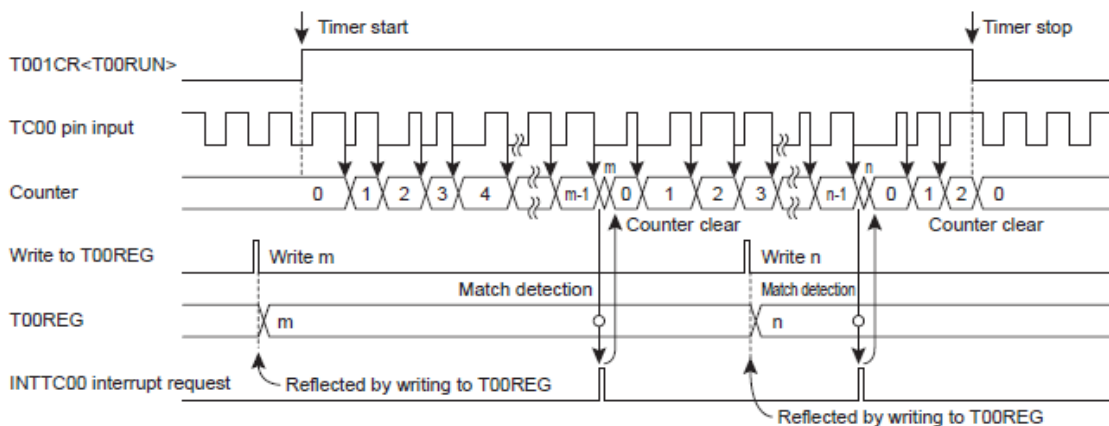

When the double buffer is disabled (T00MOD<DBE0>="0")

**Figure 10.12 Event Counter Mode Timing Chart**

**(c) Double Buffer**

Refer to "10.5.3.1 - (c) Double Buffer".

**10.5.4.3 8-bit Pulse Width Modulation (PWM) Output Mode**

The pulse-width modulated pulses with a resolution of 7 bits are output in the 8-bit PWM mode. An additional pulse can be added to the  $2 \times n$ -th duty pulse. This enables PWM output with a resolution nearly equivalent to 8 bits. ( $n=1, 2, 3...$ )

The operation of TC00 is described below, and the same applies to the operation of TC01, and similarly, TC02 and TC03.

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

**(a) Setting**

TC00 is put into the 8-bit PWM mode by setting T00MOD <TCM0> to "10" and T001CR <TCAS> to "0". To use the internal clock as the source clock, set T00MOD <EIN0> to "0" and select the clock at T00MOD <TCK0>. To use an external clock as the source clock, set T00MOD <EIN0> to "1". Set the count value to be used for the match detection and the additional pulse value at the PWM register T00PWM.

Set T00MOD <DBE0> to "1" to use the double buffer.

Setting T001CR <T00RUN> to "1" starts the operation. After the timer is started, writing to T00MOD becomes invalid. Be sure to complete the required mode settings before starting the timer.

In the 8-bit PWM mode, the T00PWM register is configured as follows:

**Timer Register 00**

<b>T00PWM (0x0028)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	PWMDUTY							PWMAD
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	1	1	1	1	1	1	1	1

**Timer Register 01**

<b>T01PWM (0x0029)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	PWMDUTY							PWMAD
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	1	1	1	1	1	1	1	1

PWMDUTY is a 7-bit register used to set the duty pulse width value (the time before the first output change) in a cycle (128 counts of the source clock).

PWMAD is a register used to set the additional pulse. When PWMAD is "1", an additional pulse that corresponds to 1 count of the source clock is added to the 2 × n-th duty pulse (n=1, 2, 3...). In other words, the 2 × n-th duty pulse has the output of PWMDUTY+1.

The additional pulse is not added when PWMAD is "0".

Set the initial state of the PWM00B pin at T00MOD <TFF0>. Setting T00MOD <TFF0> to "0" selects the "L" level as the initial state of the PWM00B pin. Setting T00MOD <TFF0> to "1" selects the "H" level as the initial state of the PWM00B pin. If the PWM00B pin is set as the function output pin in the port setting while the timer is stopped, the value of T00MOD <TFF0> is output to the PWM00B pin. Table 10.9 shows the list of output levels of the PWM00B pin.

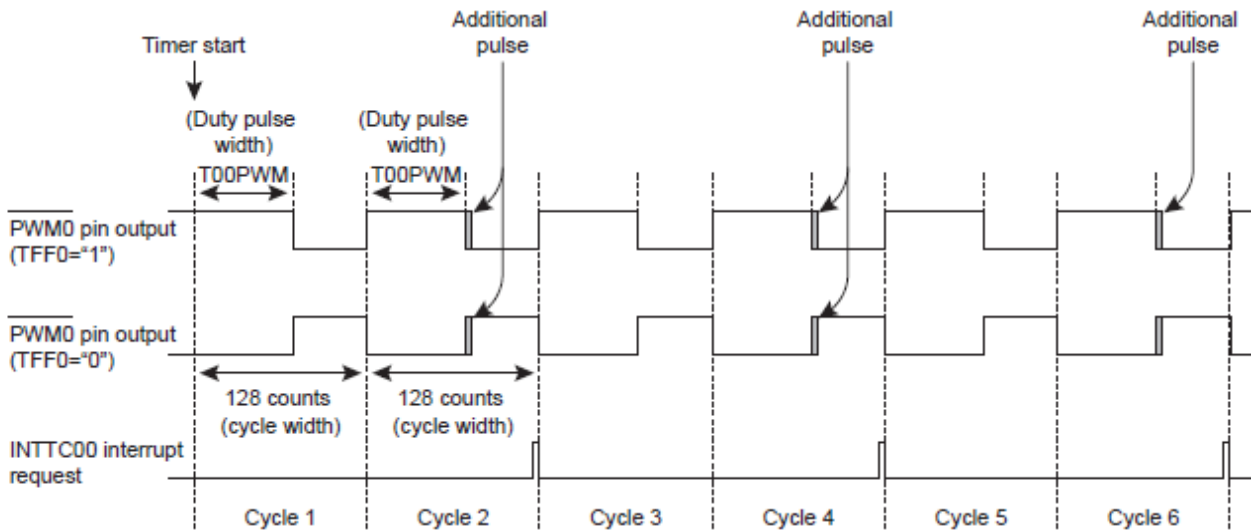


Figure 10.13 PWM00B Pulse Output

TFF0	PWM0 pin output level			
	Before the start of operation (initial state)	T00PWM <PWMDUTY> matched (after the additional pulse)	Overflow	Operation stopped (initial state)
0	L	H	L	L
1	H	L	H	H

Table 10.9 List of Output Levels of PWM00B Pin

And by setting "1" to T001CR <OUTAND> bit, a logical product (AND) pulse of TC00 and TC01's output can be output to PWM00B pin. By using this function, the remote-control waveform can be created easily.

**(b) Operation**

Setting T001CR <T00RUN> to "1" allows the up counter to increment based on the selected source clock. When a match between the lower 7 bits of the up counter value and the value set to T00PWM <PWMDUTY> is detected, the output of the PWM00B pin is reversed. When T00MOD <TFF0> is "0", the PWM00B pin changes from the "L" to "H" level. When T00MOD <TFF0> is "1", the PWM00B pin changes from the "H" to "L" level.

If T00PWM <PWMDAD> is "1", an additional pulse that corresponds to 1 count of the source clock is added at the  $2 \times n$ -th match detection ( $n=1, 2, 3, \dots$ ). In other words, the PWM00B pin output is reversed at the timing of T00PWM <PWMDUTY> + 1. When T00MOD <TFF0> is "0", the period of the "L" level becomes longer than the value set to T00PWM <PWMDUTY> by 1 source clock. When T00MOD <TFF0> is "1", the period of the "H" level becomes longer than

the value set to T00PWM <PWMDUTY> by 1 source clock. This function allows two cycles of output pulses to be handled with a resolution nearly equivalent to 8 bits.

No additional pulse is inserted when T00PWM <PWMAD> is "0".

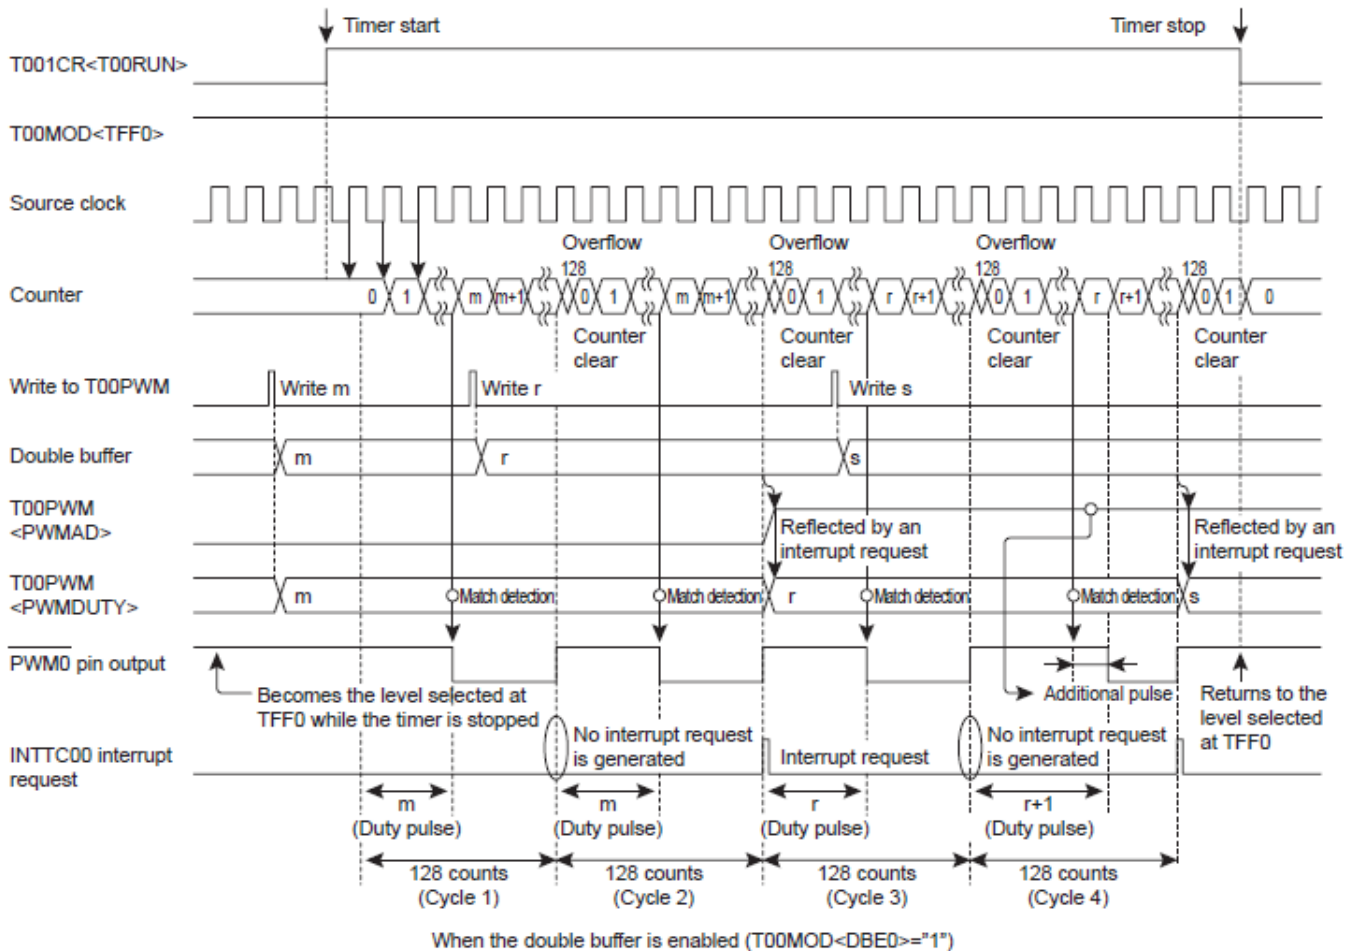


Figure 10.14 8-bit PWM Mode Timing Chart

Subsequently, the up counter continues counting up. When the up counter value reaches 128, an overflow occurs and the up counter is cleared to "0x00". At the same time, the output of PWM00B pin is reversed. When T00MOD <TFF0> is "0", the PWM00B pin changes from the "H" to "L" level. When T00MOD <TFF0> is "1", the PWM00B pin changes from the "L" to "H" level. If the 2 × n-th overflow occurs at this time, an INTTC00 interrupt request is generated. (No interrupt request is generated at the 2 × n-th -1 overflow.) Subsequently, the up counter continues counting up.

When T001CR <T00RUN> is set to "0" during the timer operation, the up counter is stopped and cleared to "0x00". The PWM00B pin returns to the level selected at T00MOD <TFF0>.

When an external source clock is selected, the maximum frequency to be supplied is  $f_{cgck}/2$  [Hz] (in NORMAL1/2 or IDLE1/2 mode) or  $f_s/2^4$  [Hz] (in SLOW1/2 or SLEEP1 mode), and a pulse width of two machine cycles or more is required at both the "H" and "L" levels.

**(c) Double Buffer**

The double buffer can be used for T00PWM by setting T00MOD <DBE0>. The double buffer is disabled by setting T00MOD <DBE0> to "0" or enabled by setting T00MOD <DBE0> to "1".

**1. When the Double Buffer is Enabled**

When a write instruction is executed on T00PWM during the timer operation, the set value is first stored in the double buffer, and T00PWM is not updated immediately. T00PWM compares the previous set value with the up counter value. When the  $2 \times n$ -th overflow occurs, an INTTC00 interrupt request is generated and the double buffer set value is stored in T00PWM. Subsequently, the match detection is executed using a new set value.

When a read instruction is executed on T00PWM, the value in the double buffer (the last set value) is read out, not the T00PWM value (the currently effective value). When a write instruction is executed on T00PWM while the timer is stopped, the set value is immediately stored in both the double buffer and T00PWM.

**2. When the Double Buffer is Disabled**

When a write instruction is executed on T00PWM during the timer operation, the set value is immediately stored in T00PWM. Subsequently, the match detection is executed using a new set value. If the value set to T00PWM is smaller than the up counter value, the PWM00B pin is not reversed until the up counter overflows and match detection is executed using a new set value. If the value set to T00PWM is equal to the up counter value, the match detection is executed immediately after data is written into T00PWM. Therefore, the timing of changing the PWM00B pin may not be an integral multiple of the source clock (Figure 10.15). Similarly, if T00PWM is set during the additional pulse output, the timing of changing the PWM00B pin may not be an integral multiple of the source clock. If these are problems, enable the double buffer.

When a write instruction is executed on T00PWM while the timer is stopped, the set value is immediately stored in T00PWM.

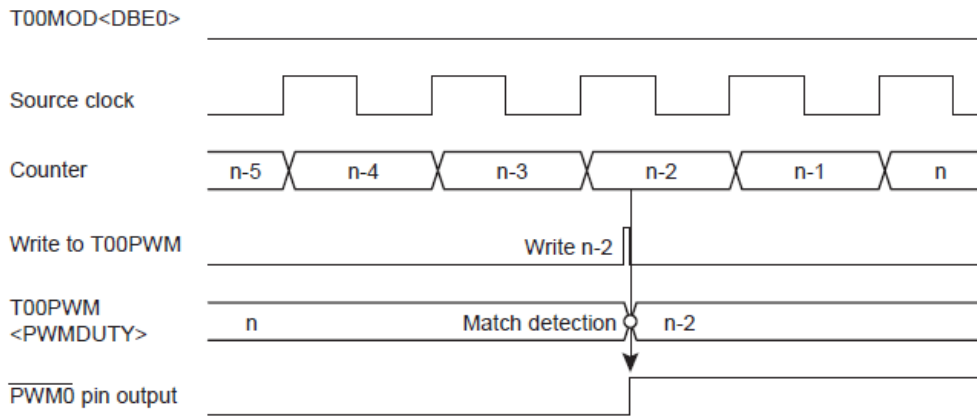


Figure 10.15 Operation When T00PWM and the Up Counter Have the Same Value

T00MOD <TCK0>	Source clock [Hz]			Resolution		7-bit cycle (period × 2)	
	NORMAL 1/2 or IDLE 1/2 mode		SLOW 1/2 or SLEEP1 mode	fcgck=8MHz	fs=32.768KHz	fcgck=8MHz	fs=32.768KHz
	SYSCR1<DV9CK> = "0"	SYSCR1<DV9CK> = "1"					
000	$fcgck/2^{11}$	$fs/2^4$	$fs/2^4$	256us	488.2us	32.8ms (65.5ms)	62.5ms (125ms)
001	$fcgck/2^{10}$	$fs/2^3$	$fs/2^3$	128us	244.1us	16.4ms (32.8ms)	31.3ms (62.5ms)
010	$fcgck/2^8$	$fcgck/2^8$	-	32us	-	4.1ms (8.2ms)	-
011	$fcgck/2^6$	$fcgck/2^6$	-	8us	-	1.0ms (2.0ms)	-
100	$fcgck/2^4$	$fcgck/2^4$	-	2us	-	256us (512us)	-
101	$fcgck/2^2$	$fcgck/2^2$	-	500ns	-	64us (128us)	-
110	$fcgck/2$	$fcgck/2$	-	250ns	-	32us (64us)	-
111	$fcgck$	$fcgck$	$fs/2^2$	125ns	122.1us	16us (32us)	15.6ms (31.3ms)

Table 10.10 Resolutions and Cycles in the 8-bit PWM Mode

#### 10.5.3.4 8-bit Programmable Pulse Generate (PPG) Output Mode

In the 8-bit PPG mode, the pulses with arbitrary duty and cycle are output by using the T00REG and T00PWM registers.

By setting the T001CR <OUTAND> register, a pulse that is a logical ANDed product of the TC00 and TC01 outputs can be output to the TC01 pin. This function facilitates the generation of remote-controlled waveforms, for example.


The operation of TC00 is described below, and the same applies to the operation of TC01, and similarly, TC02 and TC03.

**(a) Setting**

TC00 is put into the 8-bit PPG mode by setting T00MOD <TCM0> to "1" and T001CR <TCAS> to "0". To use the internal clock as the source clock: Set T00MOD <EIN0> to "0" and select the clock at T00MOD <TCK0>. To use an external clock as the source clock, set T00MOD <EIN0> to "1". Set the duty pulse width at T00PWM and the cycle width at T00REG.

Set T00MOD <DBE0> to "1" to use the double buffer.

Setting T001CR <T00RUN> to "1" starts the operation. After the timer is started, writing to T00MOD becomes invalid. Be sure to complete the required mode settings before starting the timer.

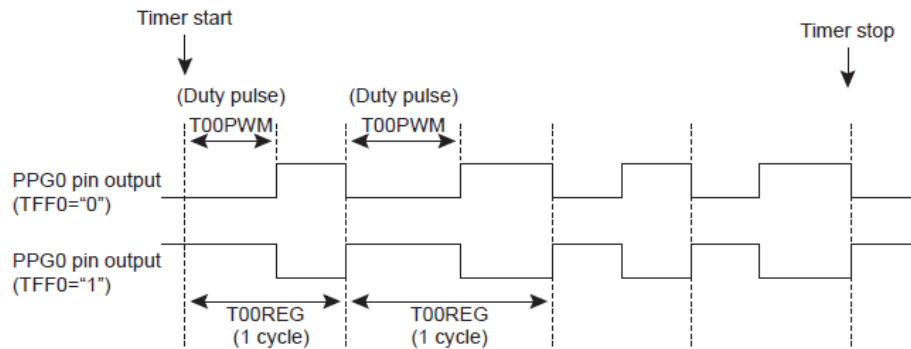

**Figure 10.16 PPG00B Pulse Output**

Set the initial state of the PPG0B pin at T00MOD <TFF0>. Setting T00MOD <TFF0> to "0" selects the "L" level as the initial state of the PPG0B pin. Setting T00MOD <TFF0> to "1" selects the "H" level as the initial state of the PPG0B pin. If the PPG0B pin is set as the function output pin in the port setting while the timer is stopped, the value of T00MOD <TFF0> is output to the PPG0B pin. Table 10.11 shows the list of output levels of the PPG0B pin.

Setting the T001CR <OUTAND> bit to "1" allows the PPG0B pin to output a pulse that is a logical ANDed product of the TC00 and TC01 outputs.

TFF0	PPG0 pin output level			
	Before the start of operation (initial state)	T00PWM matched	T00REG matched	Operation stopped (initial state)
0	L	H	L	L
1	H	L	H	H

**Table 10.11 List of Output Levels of PPG00B Pin**

### (b) Operation

Setting T001CR <T00RUN> to "1" allows the up counter to increment based on the selected source clock. When a match between the internal up counter value and the value set to T00PWM is detected, the output of the PPG0B pin is reversed. When T00MOD <TFF0> is "0", the PPG0B pin changes from the "L" to "H" level. When T00MOD <TFF0> is "1", the PPG0B pin changes from the "H" to "L" level.

Subsequently, the up counter continues counting up. When a match between the up counter value and T00REG is detected, the output of the PPG0B pin is reversed again. When T00MOD <TFF0> is "0", the PPG0B pin changes from the "H" to "L" level. When T00MOD <TFF0> is "1", the PPG0B pin changes from the "L" to "H" level. At this time, an INTTC00 interrupt request is generated.

When T001CR <T00RUN> is set to "0" during the operation, the up counter is stopped and cleared to "0x00". The PPG0B pin returns to the level selected at T00MOD <TFF0>.

When the external source clock is selected, the maximum frequency to be supplied is  $fcgck/2$  [Hz] (in NORMAL1/2 or IDLE1/2 mode) or  $f_s/2^4$  [Hz] (in SLOW1/2 or SLEEP1 mode), and a pulse width of two machine cycles or more is required at both the "H" and "L" levels.

### (c) Double Buffer

The double buffer can be used for T00PWM and T00REG by setting T00MOD <DBE0>. The double buffer is disabled by setting T00MOD <DBE0> to "0" or enabled by setting T00MOD <DBE0> to "1".

#### 1. When the Double Buffer is Enabled

When a write instruction is executed on T00PWM (T00REG) during the timer operation, the set value is first stored in the double buffer, and T00PWM (T00REG) is not updated immediately. T00PWM (T00REG) compares the previous set value with the up counter value. When an INTTC00 interrupt request is generated, the double buffer set value is stored in T00PWM (T00REG). Subsequently, the match detection is executed using a new set value.

When a read instruction is executed on T00PWM (T00REG), the value in the double buffer (the last set value) is read out, not the T00PWM (T00REG) value (the currently effective value).

When a write instruction is executed on T00PWM (T00REG) while the timer is stopped, the set value is immediately stored in both the double buffer and T00PWM (T00REG).

#### 2. When the Double Buffer is Disabled

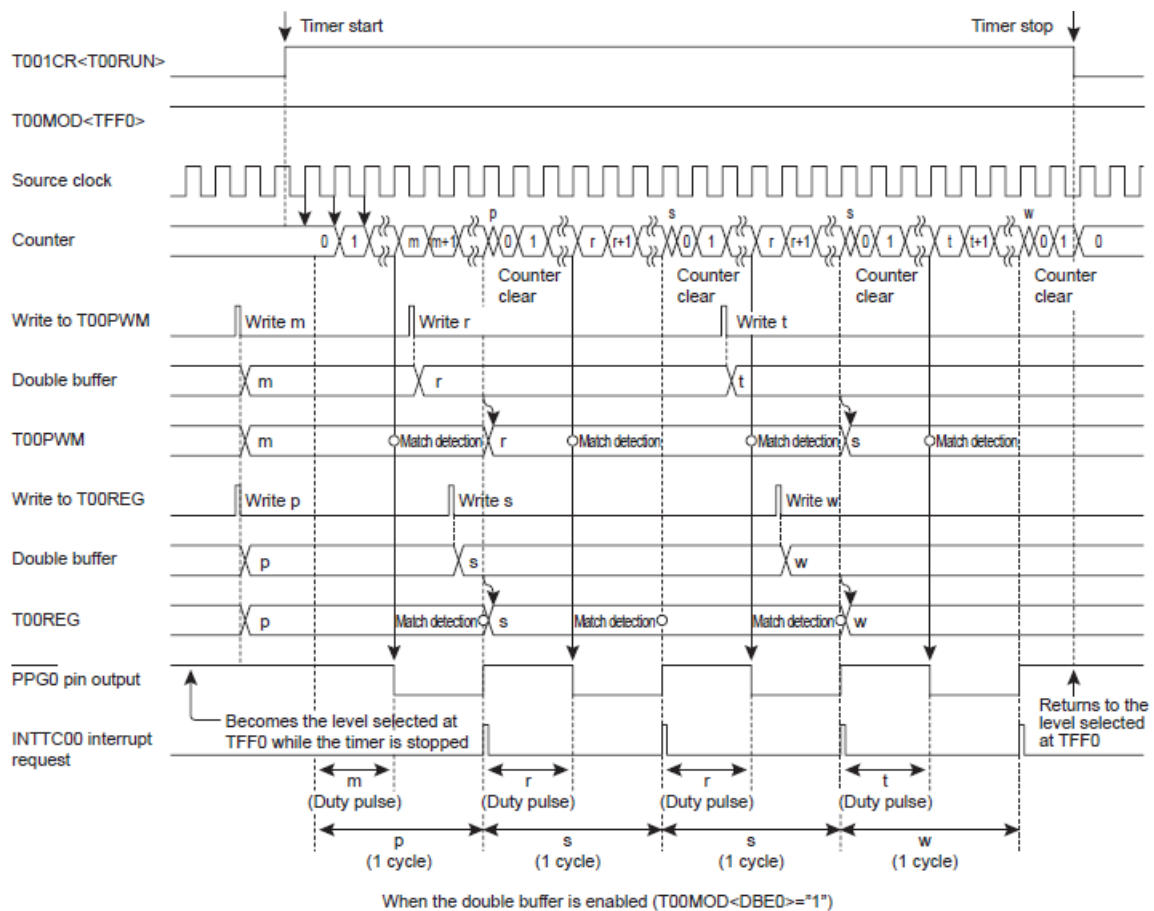


Figure 10.17 8-bit PPG Mode Timing Chart

When a write instruction is executed on T00PWM (T00REG) during the timer operation, the set value is immediately stored in T00PWM (T00REG). Subsequently, the match detection is executed using a new set value. If the value set to T00PWM (T00REG) is smaller than the up counter value, the PPG0B pin is not reversed until the up counter overflows and a match detection is executed using a new set value. If the value set to T00PWM (T00REG) is equal to the up counter value, the match detection is executed immediately after data is written into T00PWM (T00REG). Therefore, the timing of changing the PPG0B pin may not be an integral multiple of the source clock (Figure 10.18). If these are problems, enable the double buffer.

When a write instruction is executed on T00PWM (T00REG) while the timer is stopped, the set value is immediately stored in T00PWM (T00REG).

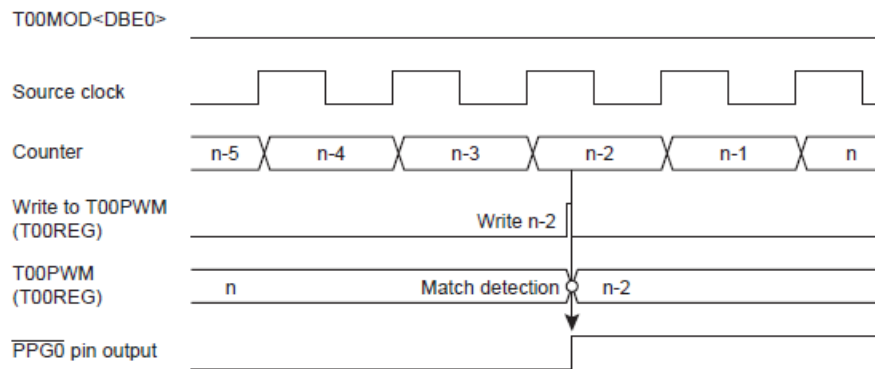


Figure 10.18 Operation When T00PWM (T00REG) and the Up Counter Have the Same Value

### 10.5.3.5 16-bit Timer Mode

In the 16-bit timer mode, TC00 and TC01 are cascaded to form a 16-bit timer counter, which can measure a longer period than an 8-bit timer. (The same to TC02 and TC03)

#### (a) Setting

Setting T001CR <TCAS> to "1" connects TC00 and TC01 and activates the 16-bit mode. All the settings of TC00 are ignored and those of TC01 are effective in the 16-bit mode.

The 16-bit timer mode is activated by setting T01MOD <TCM1> to "00" or "01" and T01MOD <EIN1> to "0". Select the source clock at T01MOD <TCK1>.

Set the count value to be used for the match detection as a 16-bit value at the timer registers T00REG and T01REG. Set the lower 8 bits of the 16-bit value at T00REG and the higher 8 bits at T01REG. (Hereinafter, the 16-bit value specified by the combined setting of T01REG and T00REG is indicated as T01+00REG.) The timer register settings are reflected on the double buffer or T01+00REG when a write instruction is executed on T01REG. Be sure to execute the write instructions on T00REG and T01REG in this order. (When data is written to the high-order register, the set values of the low-order and high-order registers become effective at the same time.)

Set T01MOD <DBE1> to "1" to use the double buffer.

Setting T001CR <T01RUN> to "1" starts the operation. After the timer is started, writing to T01MOD becomes invalid. Be sure to complete the required mode settings before starting the timer. (Make settings when T001CR <T00RUN> and <T01RUN> are "0".)

#### (b) Operation

Setting T001CR <T01RUN> to "1" allows the 16-bit up counter to increment based on the selected internal source clock. When a match between the up counter value and the T00+01REG set value is detected, an INTTC01 interrupt request is generated and the up counter is cleared to "0x0000". After being cleared, the up counter restarts counting. Setting

T001CR <T01RUN> to "0" during the timer operation makes the up counter stop counting and be cleared to "0x0000".

**(c) Double Buffer**

The double buffer can be used for T01+00REG by setting T01MOD <DBE1>. The double buffer is disabled by setting T01MOD <DBE1> to "0" or enabled by setting T01MOD <DBE1> to "1".

**1. When the Double Buffer is Enabled**

When write instructions are executed on T00REG and T01REG in this order during the timer operation, the set value is first stored in the double buffer, and T01+00REG is not updated immediately. T01+00REG compares the previous set value with the up counter value. When the values are matched, an INTTC01 interrupt request is generated and the double buffer set value is stored in T01+00REG. Then, the match detection is executed using a new set value.

When write instructions are executed on T00REG and T01REG in this order while the timer is stopped, the set value is immediately stored in both the double buffer and T01+00REG.

**2. When the Double Buffer is Disabled**

When write instructions are executed on T00REG and T01REG in this order during the timer operation, the set value is immediately stored in T01+00REG. Subsequently, the match detection is executed using a new set value.

If the value set to T01+00REG is smaller than the up counter value, the match detection is executed using a new set value after the up counter overflows. Therefore, the interrupt request interval may be longer than the selected time. If the value set to T01+00REG is equal to the up counter value, the match detection is executed immediately after data is written into T01+00REG. Therefore, the interrupt request interval may not be an integral multiple of the source clock. If these are problems, enable the double buffer.

When write instructions are executed on T00REG and T01REG in this order while the timer is stopped, the set value is immediately stored in T01+00REG. When a read instruction is executed on T01+00REG, the last value written into T01+00REG is read out, regardless of the T00MOD <DBE1> setting.

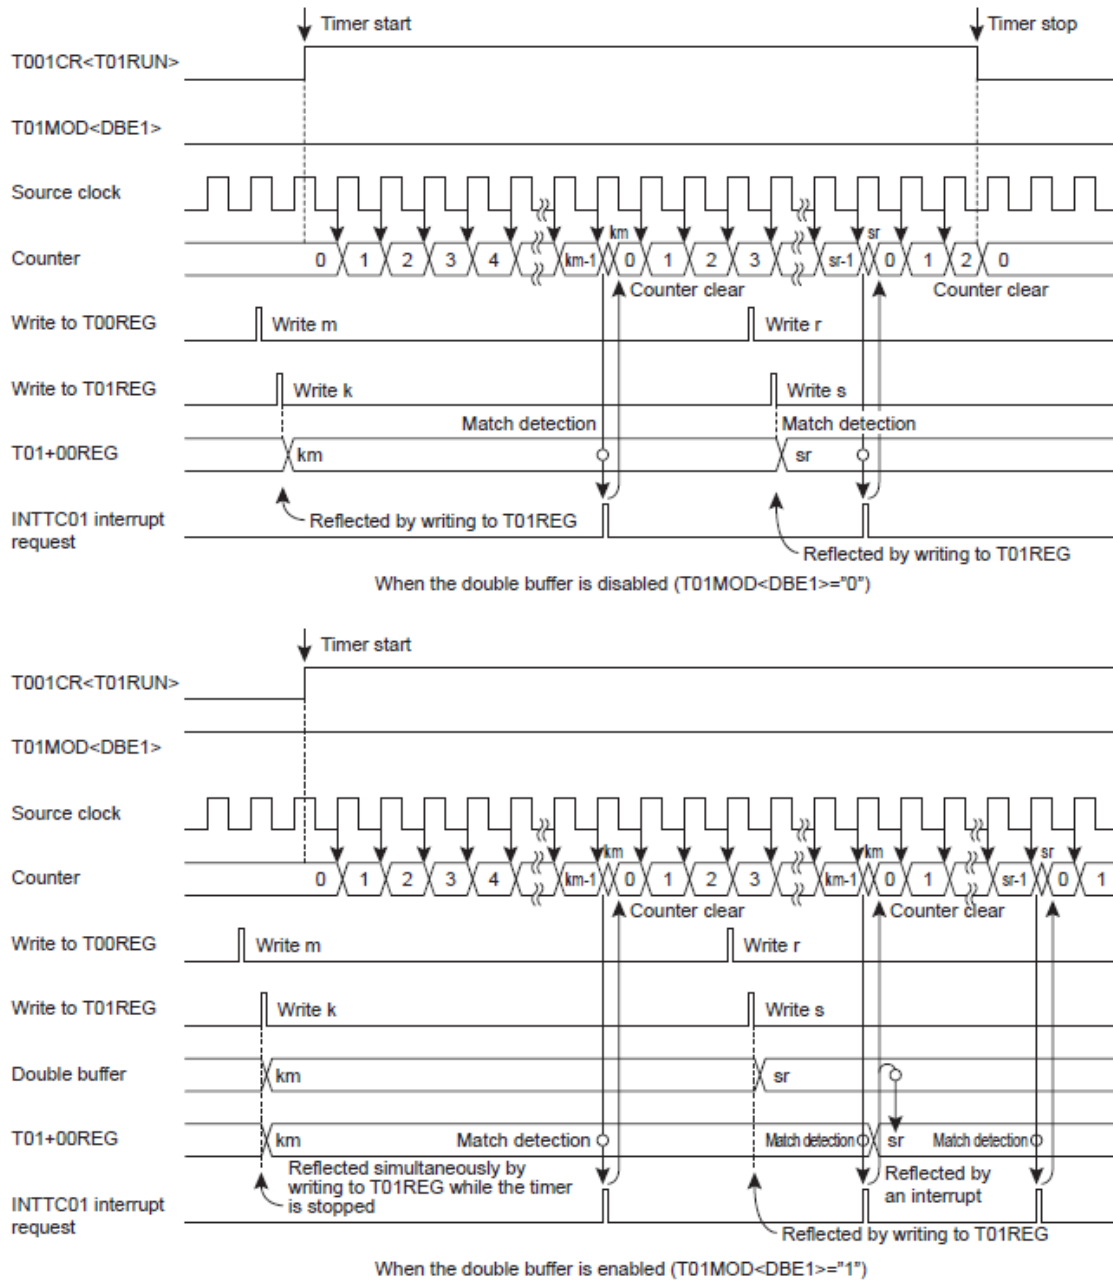


Figure 10.19 16-bit Timer Counter Timing Chart

T01MOD <TCK1>	Source clock [Hz]			Resolution		Maximum time setting	
	NORMAL 1/2 or IDLE 1/2 mode		SLOW 1/2 or SLEEP1 mode	fcgck=8MHz	fs=32.768KHz	fcgck=8MHz	fs=32.768KHz
	SYSCR1<DV9CK> = "0"	SYSCR1<DV9CK> = "1"					
000	$fcgck/2^{11}$	$fs/2^4$	$fs/2^4$	256us	488.2us	16.8s	32s
001	$fcgck/2^{10}$	$fs/2^3$	$fs/2^3$	128us	244.1us	8.4s	16s
010	$fcgck/2^8$	$fcgck/2^8$	-	32us	-	2.1s	-
011	$fcgck/2^6$	$fcgck/2^6$	-	8us	-	524.3ms	-
100	$fcgck/2^4$	$fcgck/2^4$	-	2us	-	131.1ms	-
101	$fcgck/2^2$	$fcgck/2^2$	-	500ns	-	32.8ms	-
110	$fcgck/2$	$fcgck/2$	-	250ns	-	16.4ms	-
111	fcgck	fcgck	$fs/2^2$	125ns	122.1us	8.2ms	8s

**Table 10.12 16-bit Timer Mode Resolution and Maximum Time Setting**

### 10.5.3.6 16-bit Event Counter Mode

In the 16-bit event counter mode, the up counter counts up at the falling edge of the input to the TC00 pin. TC00 and TC01 are cascaded to form a 16-bit timer counter, which can measure a longer period than an 8-bit timer. (The same to TC02 and TC03)

#### (a) Setting

Setting T01CR <TCAS> to "1" connects TC00 and TC01 and activates the 16-bit timer mode. All the settings of TC00 are ignored and those of TC01 are effective in the 16-bit timer mode. The 16-bit timer mode is activated by setting T01MOD <TCM1> to "00" or "01" and T01MOD <EINO> to "1".

Set the count value to be used for the match detection as a 16-bit value at the timer registers T00REG and T01REG. Set the lower 8 bits of the 16-bit value at T00REG and set the higher 8 bits at T01REG. (Hereinafter, the 16-bit value specified by the combined setting of T01REG and T00REG is indicated as T01+00REG.) The timer register settings are reflected on the double buffer or T01+00REG when a write instruction is executed on T01REG. Be sure to execute the write instructions on T00REG and T01REG in this order. (When data is written to the high-order register, the set values of the low-order and high-order registers become effective at the same time.)

Set T01MOD <DBE1> to "1" to use the double buffer.

Setting T01CR <T01RUN> to "1" starts the operation. After the timer is started, writing to T01MOD becomes invalid. Be sure to complete the required mode settings before starting the timer. (Make settings when T01CR <T00RUN> and <T01RUN> are "0".)

**(b) Operation**

Setting T001CR <T01RUN> to "1" allows the 16-bit up counter to increment at the falling edge of the TC00 pin. When a match between the up counter value and the T00+01REG set value is detected, an INTTC01 interrupt request is generated and the up counter is cleared to "0x0000". After being cleared, the up counter restarts counting. Setting T001CR <T01RUN> to "0" during the timer operation makes the up counter stop counting and be cleared to "0x0000".

The maximum frequency to be supplied is  $fcgck/2$  [Hz] (in NORMAL1/2 or IDLE1/2 mode) or  $fs/2^4$  [Hz] (in SLOW1/2 or SLEEP1 mode), and a pulse width of two machine cycles or more is required at both the "H" and "L" levels.

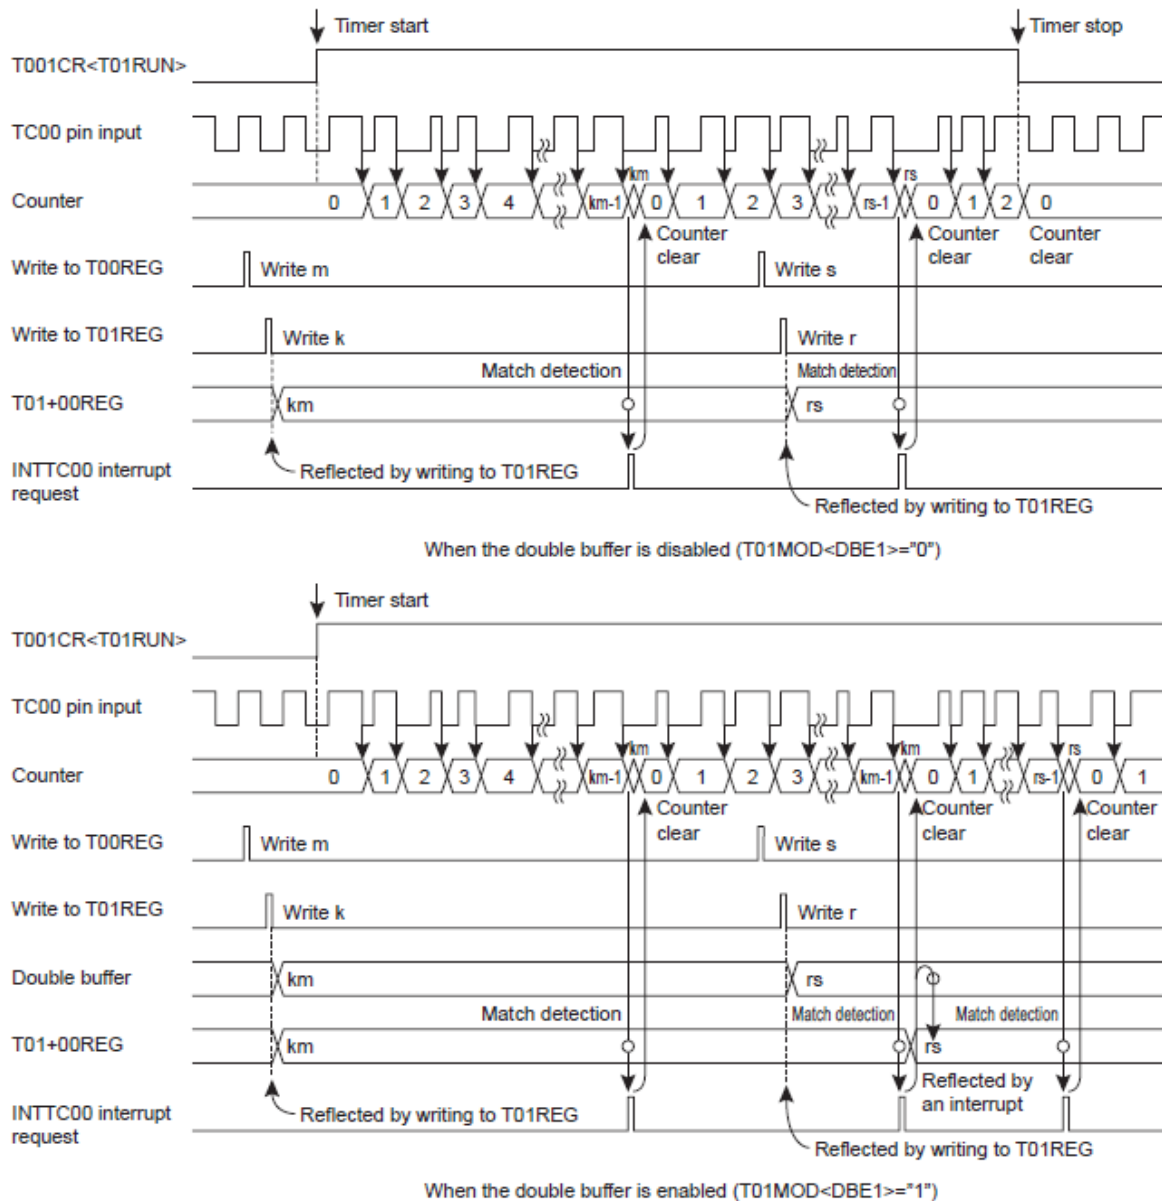


Figure 10.2016-bit Event Counter Mode Timing Chart

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

(c) **Double Buffer**

Refer to "10.5.3.5 - (c) Double Buffer".

**10.5.3.7 12-bit Pulse Width Modulation (PWM) Output Mode**

In the 12-bit PWM output mode, TC00 and TC01 are cascaded to output the pulse-width modulated pulses with a resolution of 8 bits. An additional pulse of 4 bits can be inserted, which enables PWM output with a resolution nearly equivalent to 12 bits. (The same to TC02 and TC03)

(a) **Setting**

Setting T001CR <TCAS> to "1" connects TC00 and TC01 and activates the 16-bit timer mode. All the settings of TC00 are ignored and those of TC01 are effective in the 16-bit timer mode.

The 12-bit PWM mode is selected by setting T01MOD <TCM1> to "10". To use the internal clock as the source clock, set T01MOD <EIN1> to "0" and select the clock at T01MOD <TCK1>. To use an external clock as the source clock, set T01MOD<EIN1> to "1".

Set T01MOD<DBE1> to "1" to use the double buffer.

Setting T001CR <T01RUN> to "1" starts the operation. After the timer is started, writing to T01MOD becomes invalid. Be sure to complete the required mode settings before starting the timer. (Make settings when T001CR <T00RUN> and <T01RUN> are "0".)

Set the count value to be used for the match detection and the additional pulse value as a 12-bit value at the timer registers T00PWM and T01PWM. Set bits 11 to 8 of the 12-bit value at the lower 4 bits of T01PWM and set bits 7 to 0 at T00PWM. Refer to the following table for the register configuration. (Hereinafter, the 12-bit value specified by the combined setting of T00PWM and T01PWM is indicated as T01+00PWM.) The timer register settings are reflected on the double buffer or T01+00PWM when a write instruction is executed on T01PWM. Be sure to execute the write instructions on T00PWM and T01PWM in this order. (When data is written to the high-order register, the set values of the low-order and high-order registers become effective at the same time.)

**Timer Register 00**

T00PWM (0x0028)	7	6	5	4	3	2	1	0
Bit Symbol	PWMDUTYL				PWMAD3	PWMAD2	PWMAD1	PWMAD0
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	1	1	1	1	1	1	1	1

**Timer Register 01**

<b>T01PWM (0x0029)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	-				PWMDUTYH			
Read/Write	-				R/W	R/W	R/W	R/W
After reset	1	1	1	1	1	1	1	1

Bits 7 to 4 of T01PWM are not used in the 12-bit PWM mode. However, data can be written to these bits of T01PWM and the written values are read out as they are when the bits are read. Normally, set these bits to "0".

PWMDUTYH and PWMDUTYL are 4-bit registers. They are combined to set an 8-bit value of duty pulse width (time before the first change in the output) for one cycle (256 counts of the source clock). Hereinafter, an 8-bit value specified by the combined setting of PWMDUTYH and PWMDUTYL is indicated as PWMDUTY.

PWMAD3 to PWMAD0 are the additional pulse setting register. Additional pulses can be inserted in specific cycles of the duty pulse by setting each bit to "1". The additional pulses are inserted in the positions listed in Table 10.13. PWMAD3 to PWMAD0 can be combined to specify the number of times of inserting the additional pulses in 16 cycles to any number from 1 to 16. Examples of inserting additional pulses are shown in Figure 10.21.

	Cycles in which additional pulses are inserted among cycles 1 to 16
PWMAD0="1"	9
PWMAD1="1"	5, 13
PWMAD2="1"	3, 7, 11, 15
PWMAD3="1"	2, 4, 6, 8, 10, 12, 14, 16

**Table 10.13 Cycles in Which Additional Pulses Are Inserted**

Set the initial state of the PWM1B pin at T01MOD <TFF1>. Setting T01MOD <TFF1> to "0" selects the "L" level as the initial state of the PWM1B pin. Setting T01MOD <TFF1> to "1" selects the "H" level as the initial state of the PWM1B pin. If the PWM1B pin is set as the function output pin in the port setting while the timer is stopped, the value of T01MOD <TFF1> is output to the PWM1B pin. Table 10.14 shows the list of output levels of the PWM1B pin.

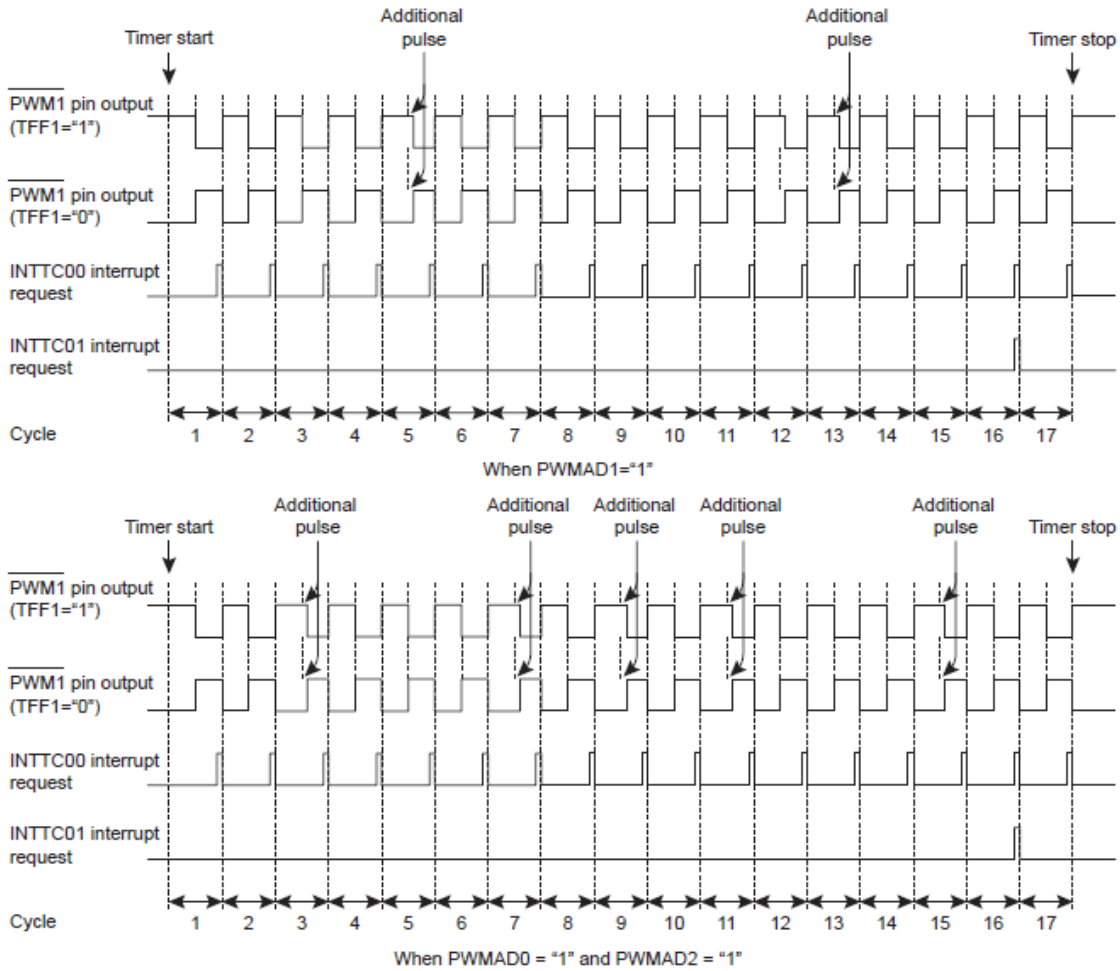


Figure 10.21 Examples of Inserting Additional Pulses

TFF1	PWM1 pin output level			
	Before the start of operation (initial state)	PWMDUTY matched (after the additional pulse)	Overflow	Operation stopped (initial state)
0	L	H	L	L
1	H	L	H	H

Table 10.14 List of Output Levels of PWM01B Pin

(b) Operation

Setting T01CR <T01RUN> to "1" allows the up counter to increment based on the selected source clock. When a match between the lower 8 bits of the up counter value and the value set to PWMDUTY is detected, the output of the PWM1B pin is reversed. When T01MOD <TFF1> is "0", the PWM1B pin changes from the "L" to "H" level. When T01MOD <TFF1> is "1", the PWM1B pin changes from the "H" to "L" level.

If any of PWMAD3 to PWMAD0 is "1", an additional pulse that corresponds to 1 count of the source clock is inserted in specific cycles of the duty pulse. In other words, the PWM1B pin output is reversed at the timing of PWMDUTY+1. When T00MOD <TFF0> is "0", the period of the "L" level becomes longer than the value set to PWMDUTY by 1 source clock. When T00MOD <TFF0> is "1", the period of the "H" level becomes longer than the value set to PWMDUTY by 1 source clock. This function allows 16 cycles of output pulses to be handled with a resolution nearly equivalent to 12 bits.

No additional pulse is inserted when PWMAD3 to PWMAD0 are all "0".

Subsequently, the up counter continues counting up. When the up counter value reaches 256, an overflow occurs and the up counter is cleared to "0x00". At the same time, the output of the PWM1B pin is reversed. When T01MOD <TFF1> is "0", the PWM1B pin changes from the "H" to "L" level. When T01MOD <TFF1> is "1", the PWM1B pin changes from the "L" to "H" level. At this time, an INTTC00 interrupt request is generated (an INTTC00 interrupt request is generated each time an overflow occurs.) An INTTC01 interrupt request is generated at the  $16 \times n$ -th overflow ( $n=1, 2, 3\dots$ ). Subsequently, the up counter continues counting up.

When T001CR <T01RUN> is set to "0" during the timer operation, the up counter is stopped and cleared to "0x00". The PWM1B pin returns to the level selected at T01MOD <TFF1>.

When an external source clock is selected, input the clock at the TC00 pin. The maximum frequency to be supplied is  $fcgck/2$  [Hz] (in NORMAL1/2 or IDLE1/2 mode) or  $fs/2^4$  [Hz] (in SLOW1/2 or SLEEP1 mode), and a pulse width of two machine cycles or more is required at both the "H" and "L" levels.

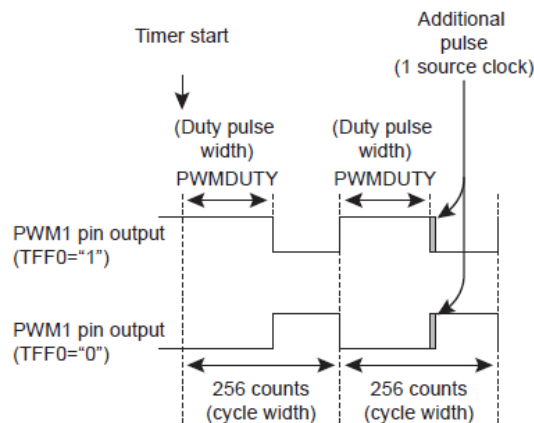


Figure 10.22 PWM1B Pin Output

(c) Double Buffer

The double buffer can be used for T01+00PWM by setting T01MOD <DBE1>. The double buffer is disabled by setting T01MOD <DBE1> to "0" or enabled by setting T01MOD <DBE1> to "1".

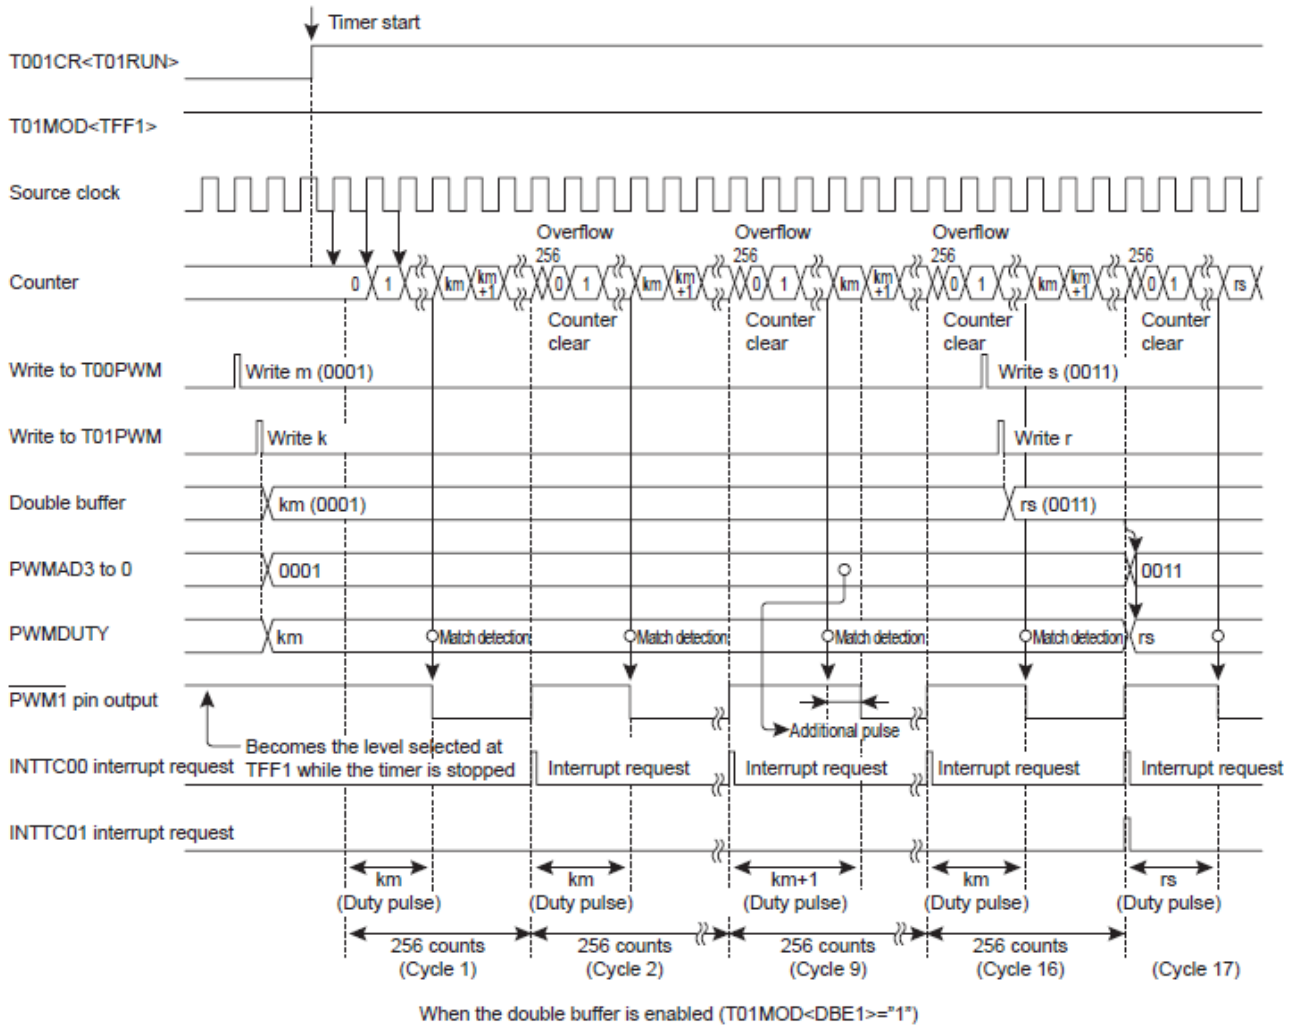


Figure 10.2312-bit PWM Mode Timing Chart

1. When the Double Buffer is Enabled

When write instructions are executed on T00PWM and T01PWM in this order during the timer operation, the set value is first stored in the double buffer, and T01+00PWM is not updated immediately. T01+00PWM compares the previous set value with the up counter value. When the 16 × n-th overflow occurs, an INTTC01 interrupt request is generated and the double buffer set value is stored in T01+00PWM. Subsequently, the match detection is executed using a new set value.

When a read instruction is executed on T01+00PWM (T00REG), the value in the double

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

buffer (the last set value) is read out, not the T01+00PWM value (the currently effective value).

When write instructions are executed on T00PWM and T01PWM in this order while the timer is stopped, the set value is immediately stored in both the double buffer and T01+00PWM.

## 2. When the Double Buffer is Disabled

When write instructions are executed on T00PWM and T01PWM in this order during the timer operation, the set value is immediately stored in T01+00PWM. Subsequently, the match detection is executed using a new set value. If the value set to T01+00PWM is smaller than the up counter value, the PWM1B pin is not reversed until the up counter overflows and a match detection is executed using a new set value. If the value set to T01+00PWM is equal to the up counter value, the match detection is executed immediately after data is written into T01+00PWM. Therefore, the timing of changing the PWM1B pin may not be an integral multiple of the source clock. Similarly, if T01+00PWM is set during the additional pulse output, the timing of changing the PWM1B pin may not be an integral multiple of the source clock. If these are problems, enable the double buffer.

When write instructions are executed on T00PWM and T01PWM in this order while the timer is stopped, the set value is immediately stored in T01+00PWM.

T01MOD <TCK1>	Source clock [Hz]			Resolution		8-bit cycle (period × 16)	
	NORMAL 1/2 or IDLE 1/2 mode		SLOW 1/2 or SLEEP 1 mode	fcgck=8MHz	fs=32.768KHz	fcgck=8MHz	fs=32.768KHz
	SYSCR1<DV9CK> = "0"	SYSCR1<DV9CK> = "1"					
000	$fcgck/2^{11}$	$fs/2^4$	$fs/2^4$	256us	488.2us	65.5ms (1048.6ms)	125ms (2000ms)
001	$fcgck/2^{10}$	$fs/2^3$	$fs/2^3$	128us	244.1us	32.8ms (524.3ms)	62.5ms (1000ms)
010	$fcgck/2^8$	$fcgck/2^8$	-	32us	-	8.2ms (131.1ms)	-
011	$fcgck/2^6$	$fcgck/2^6$	-	8us	-	2.0ms (32.8ms)	-
100	$fcgck/2^4$	$fcgck/2^4$	-	2us	-	512us (8192us)	-
101	$fcgck/2^2$	$fcgck/2^2$	-	500ns	-	128us (2048us)	-
110	$fcgck/2$	$fcgck/2$	-	250ns	-	64us (1024us)	-
111	$fcgck$	$fcgck$	$fs/2^2$	125ns	122.1us	32us (512us)	31.3ms (500ms)

Table 10.15 Resolutions and Cycles in the 12-bit PWM Mode

### 10.5.3.8 16-bit Programmable Pulse Generate (PPG) Output Mode

In the 16-bit PPG mode, TC00 and TC01 are cascaded to output the pulses that have a resolution of 16 bits and arbitrary pulse width and duty. Two 16-bit registers, T01+00REG and T01+00PWM, are used to output the pulses. This enables output of longer pulses than an 8-bit timer.

#### (a) Setting

Setting T001CR <TCAS> to "1" connects TC00 and TC01 and activates the 16-bit mode. All the settings of TC00 are ignored and those of TC01 are effective in the 16-bit mode.

The 16-bit PPG mode is selected by setting T01MOD <TCM1> to "11". To use the internal clock as the source clock, set T01MOD <EIN1> to "0" and select the clock at T01MOD <TCK1>. To use an external clock as the source clock, set T01MOD <EIN0> to "1".

Set T01MOD <DBE1> to "1" to use the double buffer.

Set the count value that corresponds to a cycle as a 16-bit value at the timer registers T01REG and T00REG. Set the count value that corresponds to a duty pulse as a 16-bit value at T01PWM and T00PWM. (Hereinafter, the 16-bit value specified by the combined setting of T01REG and T00REG is indicated as T01+00REG, and the 16-bit value specified by the combined setting of T01PWM and T00PWM is indicated as T01+00PWM). The timer register settings are reflected on the double buffer or T01+00PWM and T01+00REG when a write instruction is executed on T01PWM. Be sure to execute the write instructions on T00REG, T01REG and T00PWM before executing a write instruction on T01PWM. (When data is written to T01PWM, the set values of the four timer registers become effective at the same time.)

Set the initial state of the PPG1B pin at T01MOD <TFF1>. Setting T01MOD <TFF1> to "0" selects the "L" level as the initial state of the PPG1B pin. Setting T01MOD <TFF1> to "1" selects the "H" level as the initial state of the PPG1B pin. If the PPG1B pin is set as the function output pin in the port setting while the timer is stopped, the value of T01MOD <TFF1> is output to the PPG1B pin. Table 10.16 shows the list of output levels of the PPG1B pin.

TFF1	PPG1 pin output level			
	Before the start of operation (initial state)	T01+00PWM matched	T01+00REG matched	Operation stopped (initial state)
0	L	H	L	L
1	H	L	H	H

Table 10.16 List of Output Levels of PPG1B Pin

#### (b) Operation

Setting T001CR <T01RUN> to "1" allows the up counter to increment based on the selected source clock. When a match between the up counter value and the value set to T01+00PWM is detected, the output of the PPG1B pin is reversed. When T01MOD <TFF1> is "0", the PPG1B pin changes from the "L" to "H" level. When T01MOD <TFF1> is "1", the PPG1B pin changes

from the "H" to "L" level. At this time, an INTTC00 interrupt request is generated.

The up counter continues counting up. When a match between the up counter value and the value set to T01+00REG is detected, the output of the PPG1B pin is reversed again. When T01MOD <TFF1> is "0", the PPG1B pin changes from the "H" to "L" level. When T01MOD <TFF1> is "1", the PPG1B pin changes from the "L" to "H" level. At this time, an INTTC01 interrupt request is generated and the up counter is cleared to "0x0000".

When T001CR <T01RUN> is set to "0" during the timer operation, the up counter is stopped and cleared to "0x0000". The PPG1B pin returns to the level selected at T01MOD <TFF1>. When an external source clock is selected, input the clock at the TC00 pin. The maximum frequency to be supplied is  $fcgck/2$  [Hz] (in NORMAL1/2 or IDLE1/2 mode) or  $fs/2^4$  [Hz] (in SLOW1/2 or SLEEP1 mode), and a pulse width of two machine cycles or more is required at both the "H" and "L" levels.

### (c) Double Buffer

The double buffer can be used for T01+00PWM and T01+00REG by setting T01MOD <DBE1>. The double buffer is enabled by setting T01MOD <DBE1> to "0" or disabled by setting T01MOD <DBE1> to "1".

#### 1. When the Double Buffer is eEnabled

When a write instruction is executed on T01PWM after write instructions are executed on T00REG, T01REG and T00PWM during the timer operation, the set values are first stored in the double buffer, and T01+00PWM and T01+00REG are not updated immediately. T01+00PWM and T01+00REG compare the previous set values with the up counter value. When a match between the up counter value and the T01+00REG set value is detected, an INTTC01 interrupt request is generated and the double buffer set values are stored in T01+00PWM and T01+00REG. Subsequently, the match detection is executed using new set values.

When a write instruction is executed on T01PWM after write instructions are executed on T00REG, T01REG and T00PWM while the timer is stopped, the set values are immediately stored in both the double buffer and T01+00PWM and T01+00REG.

#### 2. When the Double Buffer is Disabled

When a write instruction is executed on T01PWM after write instructions are executed on T00REG, T01REG and T00PWM during the timer operation, the set values are immediately stored in T01+00PWM and T01+00REG. Subsequently, the match detection is executed using new set values.

If the value set to T01+00PWM or T01+00REG is smaller than the up counter value, the PPG1B pin is not reversed until the up counter overflows and a match detection is executed using a new set value. If the value set to T01+00PWM or T01+00REG is equal

to the up counter value, the match detection is executed immediately after data is written into T01+00PWM and T01+00REG. Therefore, the timing of changing the PPG1B pin may not be an integral multiple of the source clock. If these are problems, enable the double buffer.

When a write instruction is executed on T01PWM after write instructions are executed on T00REG, T01REG and T00PWM while the timer is stopped, the set values are immediately stored in T01+00PWM and T01+00REG.

When read instructions are executed on T01+00PWM and T01+00REG, the last value written into T01+00REG is read out, regardless of the T00MOD <DBE1> setting.

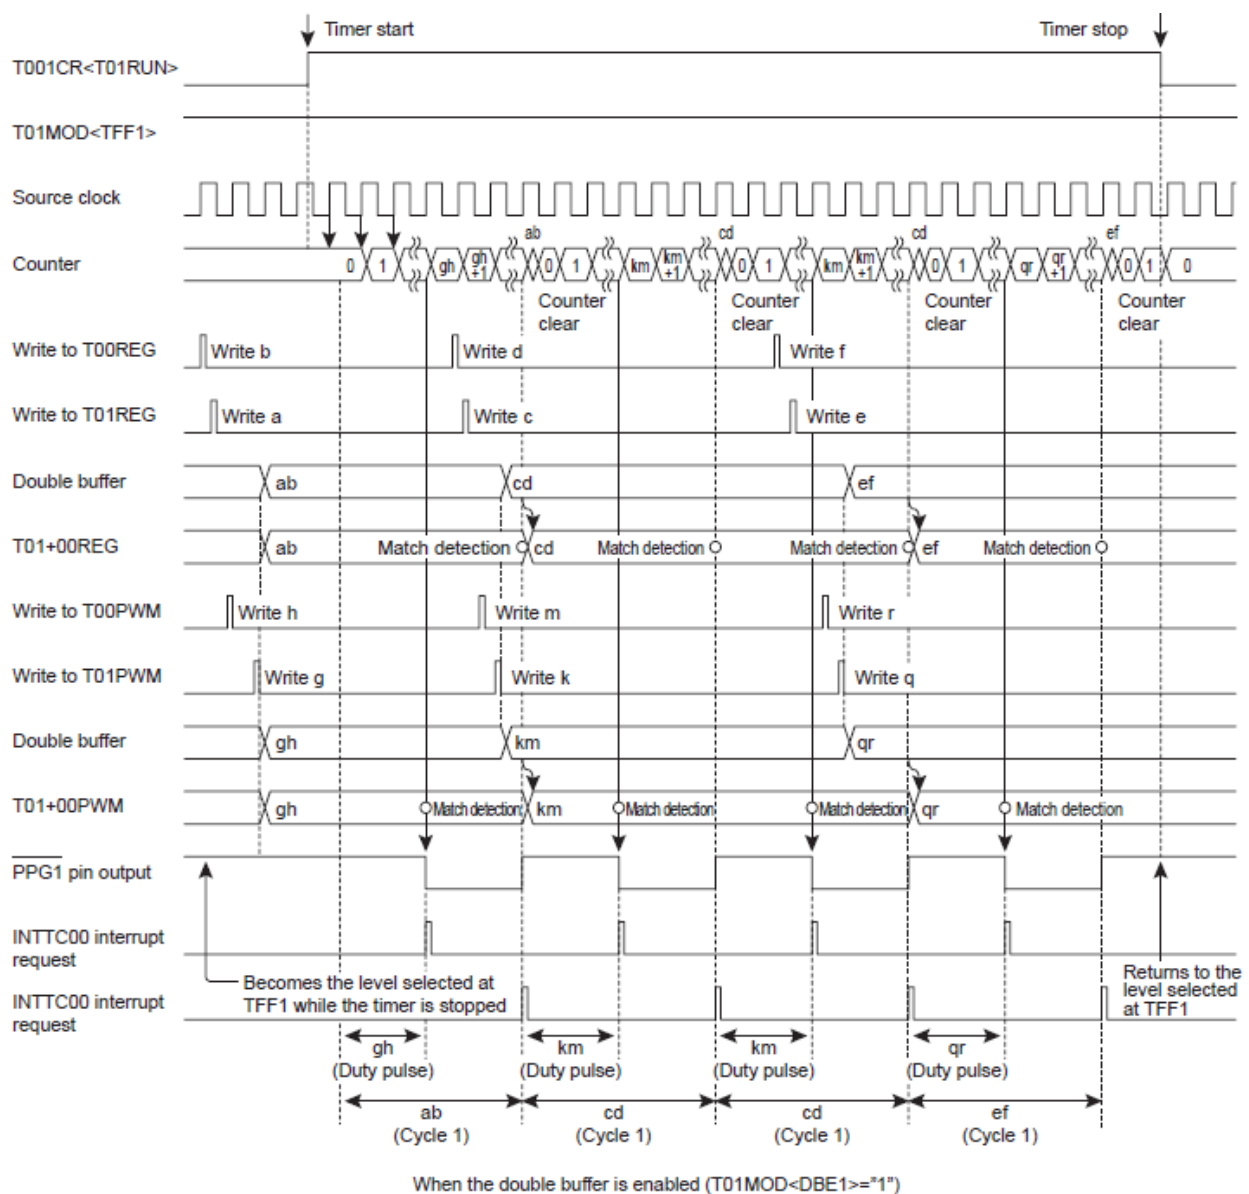


Figure 10.24 16-bit PPG Output Mode Timing Chart

## 10.6 16-bit Timer Counter (TCA)

MQ6905 contains 1 channels of high-performance 16-bit timer counters (TCA).

This chapter describes the 16-bit timer counter A0. For 16-bit timer counters A1, replace the SFR addresses and pin names as shown in Table 10.17 and Table 10.18.

	TAxDAL (Address)	TAxDRAH (Address)	TAxDRBL (Address)	TAxDRBH (Address)	TAxMOD (Address)	TAxCR (Address)	TAxSR (Address)	Low power consumption register
Timer counter A0	TA0DRAL (0x002D)	TA0DRAH (0x002E)	TA0DRBL (0x002F)	TA0DRBH (0x0030)	TA0MOD (0x0031)	TA0CR (0x0032)	TA0SR (0x0033)	POFFCR0 <TCA0EN>
Timer counter A1	TA1DRAL (0x0FA8)	TA1DRAH (0x0FA9)	TA1DRBL (0x0FAA)	TA1DRBH (0x0FAB)	TA1MOD (0x0FAC)	TA1CR (0x0FAD)	TA1SR (0x0FAE)	POFFCR0 <TCA1EN>

Table 10.17 SFR Address Assignment

	Timer Input Pin	PPG Output Pin
Timer counter A0	TCA0 pin	PPGA0B pin
Timer counter A1	TCA1 pin	PPGA1B pin

Table 10.18 Pin Names

### 10.6.1 Control

Timer Counter A0 is controlled by the low power consumption register (POFFCR0), the timer counter A0 mode register (TA0MOD), the timer counter A0 control register (TA0CR) and two 16-bit timer A0 registers (TA0DRA and TA0DRB).

#### Low Power Consumption Register 0

POFFCR0 (0x0F74)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	TC023EN	TC001EN	-	TCC0EN	TCA1EN	TCA0EN
Read/Write	R	R	R/W	R/W	R	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

TC023EN	TC023 enable control	0: Disable 1: Enable
TC001EN	TC001 enable control	0: Disable 1: Enable
TCC0EN	TCC0 enable control	0: Disable 1: Enable
TCA1EN	TCA1 enable control	0: Disable 1: Enable
TCA0EN	TCA0 enable control	0: Disable 1: Enable

**Timer Counter A0 Mode Register**

TA0MOD (0x0031)	7	6	5	4	3	2	1	0
Bit Symbol	TA0DB1	TA0TED	TA0MCAP TA0METT	TA0CK		TA0M		
Read/Write	R/W	R/W	R/W	R/W		R/W		
After reset	1	0	0	0	0	0	0	0

TA0DBE	Double buffer control	0: Disable the double buffer 1: Enable the double buffer			
TA0TED	External trigger input selection	0: Rising edge / H Level 1: Falling edge / L Level			
TA0MCAP	Pulse width measurement mode control	0: Double edge capture 1: Single edge capture			
TA0METT	External trigger timer mode control	0: Trigger start 1: Trigger start and stop			
TA0CK	Timer counter 1 source clock selection	Normal 1/2, IDLE 1/2 mode			
		SYSR1 <DV9CK>=0	SYSR1 <DV9CK>=1	SLOW 1/2 mode SLEEP 1 mode	
		00:	$fcgck/2^{10}$	$fs/2^3$	$fs/2^3$
		01:	$fcgck/2^6$	$fcgck/2^6$	-
TA0M	Timer counter 1 operation mode selection	10:	$fcgck/2^2$	$fcgck/2^2$	-
		11:	$fcgck/2$	$fcgck/2$	-
		000:	Timer mode		
		001:	Timer mode		
		010:	Event counter mode		
		011:	PPG output mode (Software start)		
100:	External trigger time mode				
101:	Window mode				
110:	Pulse width measurement mode				
111:	Reserved				

Note 1):  $fcgck$ : Gear clock [Hz],  $fs$ : Low-frequency clock [Hz]

Note 2): Set TA0MOD in the stopped state (TA0CR <TA0S>="0"). Writing to TA0MOD is invalid during the operation (TA0CR <TA0S>="1").

**Timer Counter A0 Control Register**

TA0CR (0x0032)	7	6	5	4	3	2	1	0
Bit Symbol	TA0OVE	TA0TFF	TA0NC		-	-	TA0ACAP TA0MPPG	TA0S
Read/Write	R/W	R/W	R/W		R	R	R/W	R/W
After reset	0	1	0	0	0	0	0	0

TA0OVE	Overflow interrupt control	0: Generate no INTTCA0 interrupt request when the counter overflow occurs. 1: Generate an INTTCA0 interrupt request when the counter overflow occurs.
TA0TFF	Timer F/F control	0: Clear 1: Set

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

TA0MCAP	Pulse width measurement mode control	0: Double edge capture 1: Single edge capture
TA0NC	Noise canceller sampling interval setting	Normal 1/2 or IDLE 1/2 mode
		00: No noise canceller
		01: $fcgck/2$
		10: $fcgck/2^2$
		11: $fcgck/2^8$
TA0ACAP	Auto capture function	0: Disable the auto capture 1: Enable the auto capture
TA0MPPG	PPG output control	0: Continuous 1: One-shot
TA0S	Timer counter A start control	0: Stop and counter clear 1: Start

Note 1): The auto capture can be used only in the timer, event counter, external trigger timer and window modes.

Note 2): Set TA0TFF, TA0OVE and TA0NC in the stopped state (TA0S="0"). Writing is invalid during the operation (TA0S="1").

Note 3): When the STOP mode is started, the start control (TA0S) is automatically cleared to "0" and the timer stops. Set TA0S again to use the timer counter after the release of the STOP mode.

Note 4): When a read instruction is executed on TA0CR, bits 3 and 2 are read as "0".

Note 5): Do not set TA0NC to "01" or "10" when the SLOW 1/2 or SLEEP 1 mode is used. Setting TA0NC to "01" or "10" stops the noise canceller and no signal is input to the timer.

#### Timer Counter A0 Status Register

TA0SR (0x0033)	7	6	5	4	3	2	1	0
Bit Symbol	TA0OVF	-	-	-	-	-	TA0CPFA	TA0CPFB
Read/Write	R	R	R	R	R	R	R	R
After reset	0	0	0	0	0	0	0	0

TA0OVF	Overflow flag	0: No overflow has occurred. 1: At least an overflow has occurred.
TA0CPFA	Capture completion flag A	0: No capture operation has been executed. 1: At least a pulse width capture has been executed in the double-edge capture
TA0CPFB	Capture completion flag B	0: Double edge capture 1: At least a capture operation has been executed in the single-edge capture. At least a pulse duty width capture has been executed in the double-edge capture.

Note 1): TA0OVF, TA0CPFA and TA0CPFB are cleared to "0" automatically after TA0SR is read. Writing to TA0SR is invalid.

Note 2): When a read instruction is executed on TA0SR, bits 6 to 2 are read as "0".

#### Timer Counter A0 Register AH

TA0DRAH (0x002E)	15	14	13	12	11	10	9	8
Bit Symbol	TA0DRAH							
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	1	1	1	1	1	1	1	1

#### Timer Counter A0 Register AL

<b>TA0DRAL (0x002D)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	TA0DRAL							
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	1	1	1	1	1	1	1	1

#### Timer Counter A0 Register BH

<b>TA0DRBH (0x0030)</b>	<b>15</b>	<b>14</b>	<b>13</b>	<b>12</b>	<b>11</b>	<b>10</b>	<b>9</b>	<b>8</b>
Bit Symbol	TA0DRBH							
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	1	1	1	1	1	1	1	1

#### Timer Counter A0 Register BL

<b>TA0DRBL (0x002F)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	TA0DRBL							
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	1	1	1	1	1	1	1	1

*Note 1): When a write instruction is executed on TA0DRAL (TA0DRBL), the set value does not become effective immediately, but is temporarily stored in the temporary buffer. Subsequently, when a write instruction is executed on the higher-level register, TA0DRAH (TA0DRBH), the 16-bit set values are collectively stored in the double buffer or TA0DRAL/H. When setting data to the timer counter A0 register, be sure to write the data into the lower level register and the higher level in this order.*

*Note 2): The timer counter A0 register is not writable in the pulse width measurement mode.*

## 10.6.2 Low Power Consumption Function

Timer counter A0 has the low power consumption register (POFFCR0) that saves power consumption when the timer is not used.

Setting POFFCR0<TCA0EN> to "0" disables the basic clock supply to timer counter A0 to save power. Note that this makes the timer unusable. Setting POFFCR0<TCA0EN> to "1" enables the basic clock supply to timer counter A0 and allows the timer to operate.

After reset, POFFCR0<TCA0EN> is initialized to "0", and this makes the timer unusable. When using the timer for the first time, be sure to set POFFCR0<TCA0EN> to "1" in the initial setting of the program (before the timer control register is operated).

Do not change POFFCR0<TCA0EN> to "0" during the timer operation. Otherwise timer counter A0 may operate unexpectedly.

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

### 10.6.3 Timer Function

Timer counter A0 has six types of operation modes; timer, external trigger timer, event counter, window, pulse width measurement and programmable pulse generate (PPG) output modes.

#### 10.6.3.1 Timer Mode

In the timer mode, the up-counter counts up using the internal clock, and interrupts can be generated regularly at specified times.

##### (a) Setting

Setting the operation mode selection TA0MOD <TA0M> to "000" or "001" activates the timer mode. Select the source clock at TA0MOD <TA0CK>.

Setting TA0CR <TA0S> to "1" starts the timer operation. After the timer is started, writing to TA0MOD and TA0CR <TA0OVE> becomes invalid. Be sure to complete the required mode settings before starting the timer.

TA0MOD <TA0CK>	Source clock [Hz]			Resolution		Maximum time setting	
	NORMAL 1/2 or IDLE 1/2 mode		SLOW1/2 or SLEEP1 mode	fcgck=10MHz	fs=32.768kHz	fcgck=10MHz	fs=32.768kHz
	SYSCR1<DV9CK> = "0"	SYSCR1<DV9CK> = "1"					
00	$fcgck/2^{10}$	$fs/2^3$	$fs/2^3$	102.4μs	244.1μs	6.7s	16s
01	$fcgck/2^6$	$fcgck/2^6$	-	6.4μs	-	419.4ms	-
10	$fcgck/2^2$	$fcgck/2^2$	-	400ns	-	26.2ms	-
11	$fcgck/2$	$fcgck/2$	-	200ns	-	13.1ms	-

Table 10.19 Timer Mode Resolution and Maximum Time Setting

##### (b) Operation

Setting TA0CR <TA0S> to "1" allows the 16-bit up counter to increment based on the selected internal source clock. When a match between the up-counter value and the value set to timer register A (TA0DRA) is detected, an INTTCA0 interrupt request is generated and the up counter is cleared to "0x0000". After being cleared, the up counter continues counting. Setting TA0CR <TA0S> to "0" during the timer operation causes the up counter to stop counting and be cleared to "0x0000".

##### (c) Auto Capture

The latest contents of the up counter can be taken into timer register B (TA0DRB) by setting TA0CR <TA0ACAP> to "1" (auto capture function). When TA0CR<TA0ACAP> is "1", the current contents of the up counter can be read by reading TA0DRBL. TA0DRBH is loaded at the same time as TA0DRBL is read. Therefore, when reading the captured value, be sure to read TA0DRBL and TA0DRBH in this order. (The capture time is the timing when TA0DRBL is read.) The auto capture function can be used whether the timer is operating or stopped. When the timer is stopped, TA0DRBL is read as "0x00". TA0DRBH keeps the captured value after the timer

stops, but it is cleared to "0x00" when TA0DRBL is read while the timer is stopped.

If the timer is started with TA0CR <TA0ACAP> written to "1", the auto capture is enabled immediately after the timer is started.

*Note): The value set to TA0CR <TA0ACAP> cannot be changed at the same time as TA0CR <TA0S> is rewritten from "1" to "0". (This setting is invalid.)*

#### (d) Register Buffer Configuration

##### 1. Temporary Buffer

MQ6905 contains an 8-bit temporary buffer. When a write instruction is executed on TA0DRAL, the data is first stored into this temporary buffer, whether the double buffer is enabled or disabled. Subsequently, when a write instruction is executed on TA0DRAH, the set value is stored into the double buffer or TA0DRAH. At the same time, the set value in the temporary buffer is stored into the double buffer or TA0DRAL. (This structure is designed to enable the set values of the lower-level and higher-level registers simultaneously.) Therefore, when setting data to TA0DRA, be sure to write the data into TA0DRAL and TA0DRAH in this order.

##### 2. Double Buffer

In the MQ6905, the double buffer can be used by setting TA0CR <TA0DBF>. Setting TA0CR <TA0DBF> to "0" disables the double buffer. Setting TA0CR <TA0DBF> to "1" enables the double buffer.

###### - When the double buffer is enabled

When a write instruction is executed on TA0DRAH during the timer operation, the set value is first stored into the double buffer, and TA0DRAH/L are not updated immediately. TA0DRAH/L compare the up counter value to the last set values. If the values are matched, an INTTCA0 interrupt request is generated and the double buffer set value is stored in TA0DRAH/L. Subsequently, the match detection is executed using a new set value.

When a read instruction is executed on TA0DRAH/L, the double buffer value (the last set value) is read, rather than the TA0DRAH/L values (the current effective values).

When a write instruction is executed on TA0DRAH/L while the timer is stopped, the set value is immediately stored into both the double buffer and TA0DRAH/L.

###### - When the double buffer is disabled

When a write instruction is executed on TA0DRAH during the timer operation, the set value is immediately stored into TA0DRAH/L. Subsequently, the match detection is executed using a new set value.

If the values set to TA0DRAH/L are smaller than the up counter value, the match detection is executed using a new set value after the up counter overflows. Therefore, the interrupt request interval may be longer than the selected time. If that is a problem, enable the double buffer.

When a write instruction is executed on TA0DRAH/L while the timer is stopped, the set value is immediately stored into TA0DRAH/L.

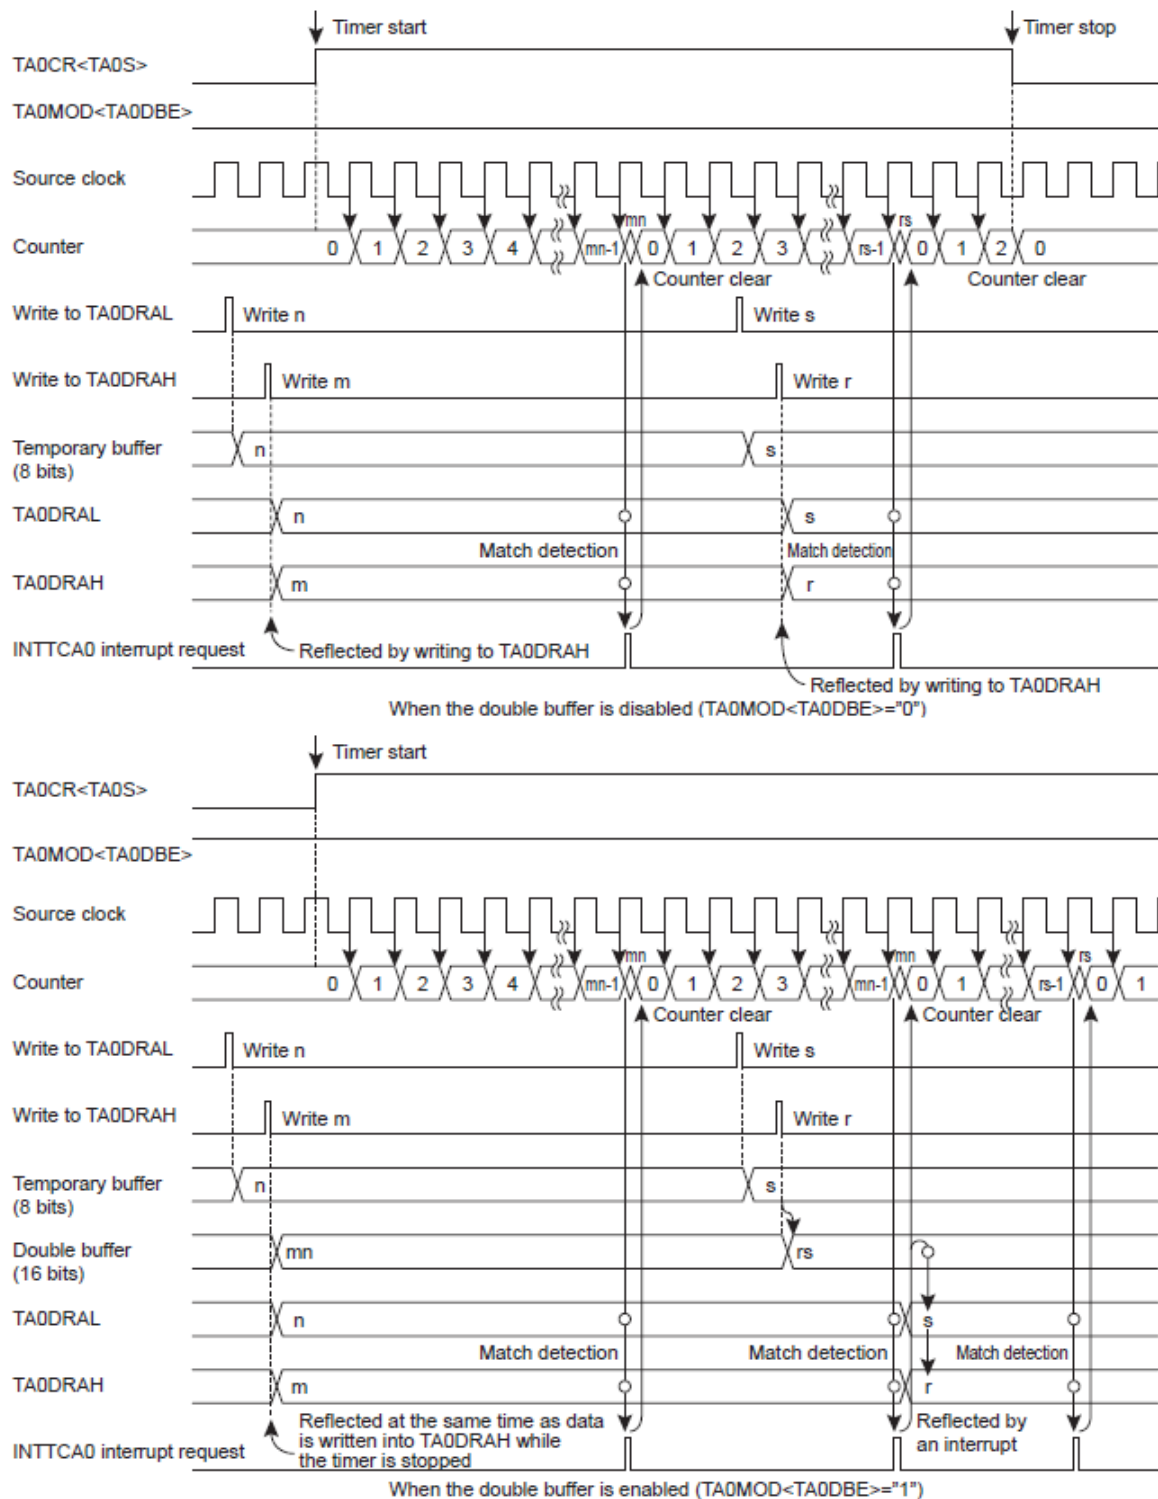


Figure 10.25 Timer Mode Timing Chart

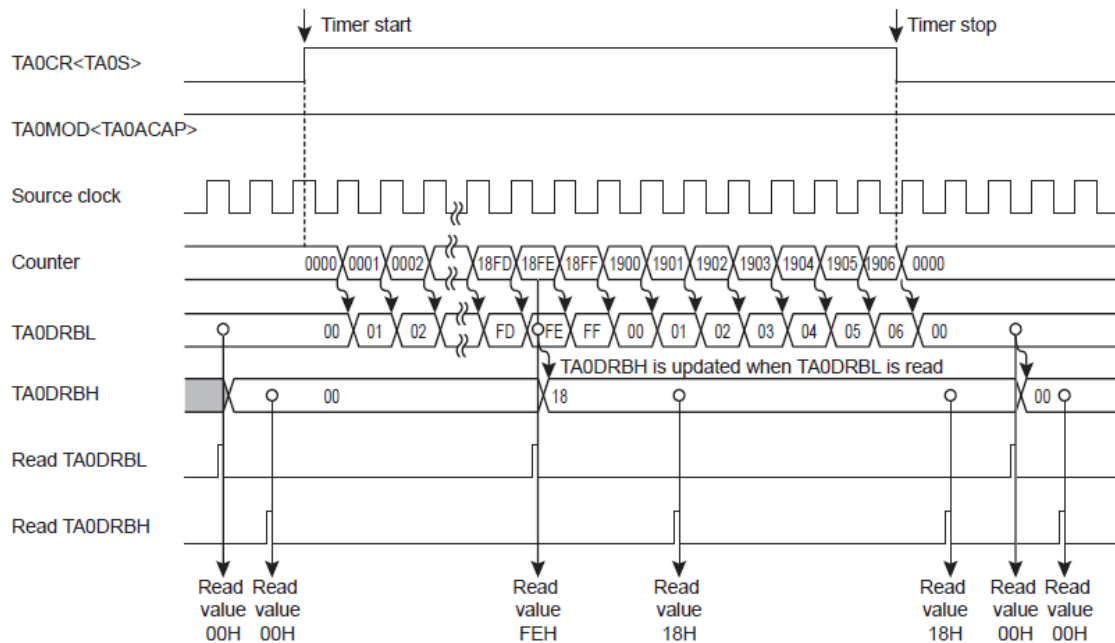


Figure 10.26 Timer Mode Timing Chart (Auto Capture)

### 10.6.3.2 External Trigger Timer Mode

In the external trigger timer mode, the up counter starts counting when it is triggered by the input to the TCA0 pin.

#### (a) Setting

Setting the operation mode selection TA0MOD <TA0M> to "100" activates the external trigger timer mode. Select the source clock at TA0MOD <TA0CK>.


Select the trigger edge at the trigger edge input selection TA0MOD <TA0TED>. Setting TA0MOD <TA0TED> to "0" selects the rising edge, and setting it to "1" selects the falling edge.

Note that this mode uses the TA0 input pin, and the TCA0 pin must be set to the input mode beforehand in port settings.

The operation is started by setting TA0CR <TA0S> to "1". After the timer is started, writing to TA0MOD and TA0CR <TA0OVE> is disabled. Be sure to complete the required mode settings before starting the timer.

#### (b) Operation

After the timer is started, when the selected trigger edge is input to the TCA0 pin, the up counter increments according to the selected source clock. When a match between the up counter value and the value set to timer register A (TA0DRA) is detected, an INTTCA0 interrupt request is generated and the up counter is cleared to "0x0000". After being cleared, the up counter continues counting.

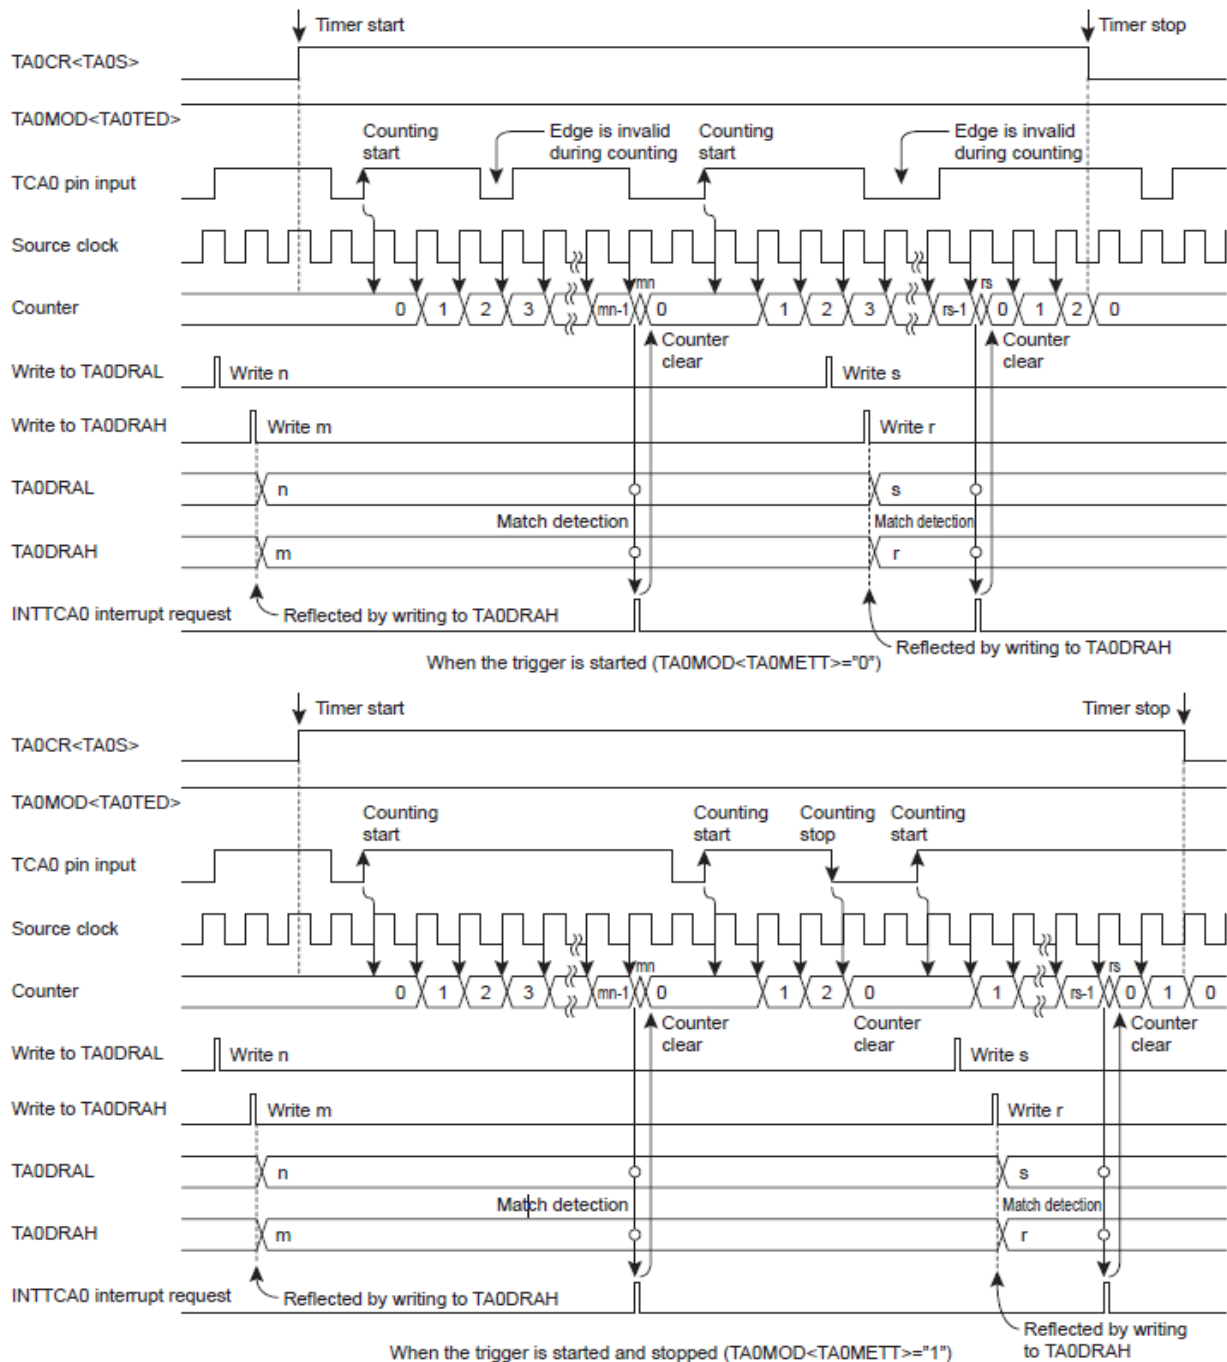

**Figure 10.27 External Trigger Timer Mode Timing Chart**

When TA0MOD <TA0METT> is "1" and the edge opposite to the selected trigger edge is detected, the up counter stops counting and is cleared to "0x0000". Subsequently, when the selected trigger edge is detected, the up counter restarts counting. In this mode, an interrupt request can be generated by detecting that the input pulse exceeds a certain pulse width. If TA0MOD <TA0METT> is "0", the detection of the selected edge and the opposite edge is ignored during the period from the detection of the specified trigger edge and the start of

counting through until the match detection.

Setting TA0CR <TA0S> to "0" during the timer operation causes the up counter to stop counting and be cleared to "0x0000".

**(c) Auto Capture**

Refer to "10.6.3.1 (c) Auto Capture".

**(d) Register Buffer Configuration**

Refer to "10.6.3.1 (d) Register Buffer Configuration".

### 10.6.3.3 Event Counter Mode

In the event counter mode, the up counter counts up at the edge of the input to the TCA0 pin.

**(a) Setting**

Setting the operation mode selection TA0MOD <TA0M> to "010" activates the event counter mode.

Set the trigger edge at the external trigger input selection TA0MOD <TA0TED>. Setting TA0MOD <TA0TED> to "0" selects the rising edge, and setting it to "1" selects the falling edge for counting up.

Note that this mode uses the TA0 input pin, and the TCA0 pin must be set to the input mode beforehand in port settings.

The operation is started by setting TA0CR <TA0S> to "1". After the timer is started, writing to TA0MOD and TA0CR <TA0OVE> is disabled. Be sure to complete the required mode settings before starting the timer.

**(b) Operation**

After the event counter mode is started, when the selected trigger edge is input to the TCA0 pin, the up counter increments.

When a match between the up counter value and the value set to timer register A (TA0DRA) is detected, an INTTCA0 interrupt request is generated and the up counter is cleared to "0x0000". After being cleared, the up counter continues counting and counts up at each edge of the input to the TCA0 pin. Setting TA0CR <TA0S> to "0" during the operation causes the up counter to stop counting and be cleared to "0x0000".

The maximum frequency to be supplied is  $f_{cgck}/2$  [Hz] (in the NORMAL 1/2 or IDLE 1/2 mode) or  $f_s/2$  [Hz] (in the SLOW 1/2 or SLEEP 1 mode), and a pulse width of two machine cycles or more is required at both the "H" and "L" levels.

(c) **Auto Capture**

Refer to "10.6.3.1 (c) Auto Capture".

(d) **Register Buffer Configuration**

Refer to "10.6.3.1 (d) Register Buffer Configuration".

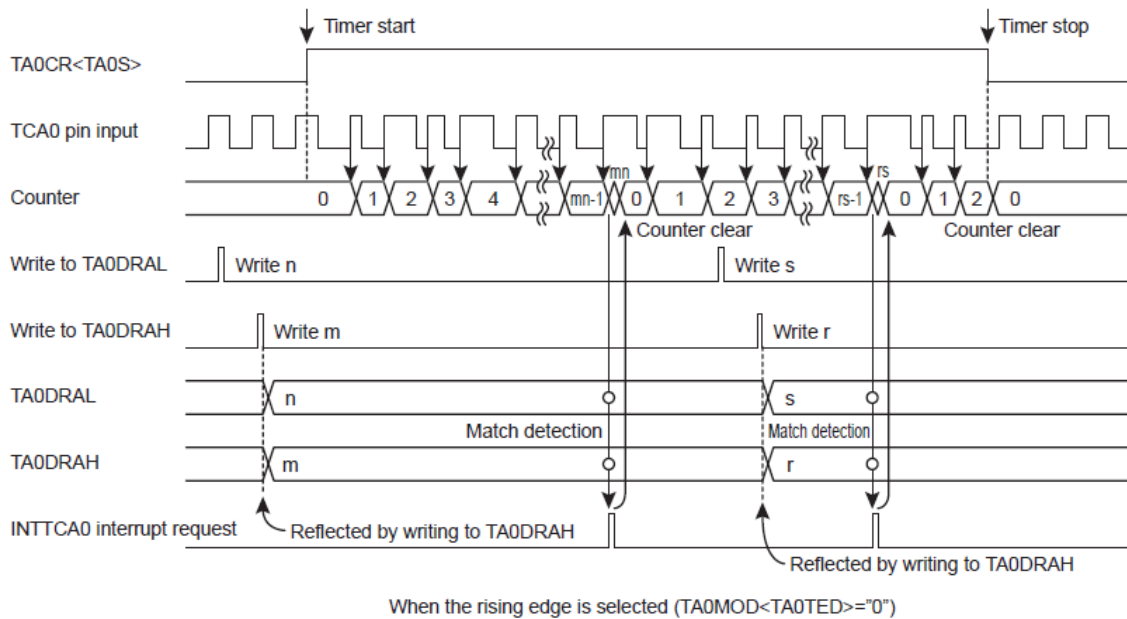


Figure 10.28 Event Counter Mode Timing Chart

**10.6.3.4 Window Mode**

In the window mode, the up counter counts up at the rising edge of the pulse that is logical anded product of the input pulse to the TCA0 pin (window pulse) and the internal clock.

(a) **Setting**

Setting the operation mode selection TA0MOD <TA0M> to "101" activates the window mode. Select the source clock at TA0MOD <TA0CK>.

Select the window pulse level at the trigger edge input selection TA0MOD <TA0TED>. Setting TA0MOD <TA0TED> to "0" enables counting up as long as the window pulse is at the "H" level. Setting TA0MOD <TA0TED> to "1" enables counting up as long as the window pulse is at the "L" level.

Note that this mode uses the TA0 input pin, and the TCA0 pin must be set to the input mode beforehand in port settings.

The operation is started by setting TA0CR <TA0S> to "1". After the timer is started, writing to TA0MOD and TA0CR <TA0OVE> is disabled. Be sure to complete the required mode settings before starting the timer.

**(b) Operation**

After the operation is started, when the level selected at TA0MOD <TA0TED> is input to the TCA0 pin, the up counter increments according to the source clock selected at TA0MOD <TA0CK>. When a match between the up counter value and the value set to timer register A (TA0DRA) is detected, an INTTCA0 interrupt request is generated and the up counter is cleared to "0x0000". After being cleared, the up counter restarts counting.

The maximum frequency to be supplied must be slow enough for the program to analyze the count value. Define a frequency pulse that is sufficiently lower than the programmed internal source clock.


Setting TA0CR <TA0S> to "0" during the timer operation causes the up counter to stop counting and be cleared to "0x0000".

**(c) Auto Capture**

Refer to "10.6.3.1 (c) Auto Capture".

**(d) Register Buffer Configuration**

Refer to "10.6.3.1 (d) Register Buffer Configuration".

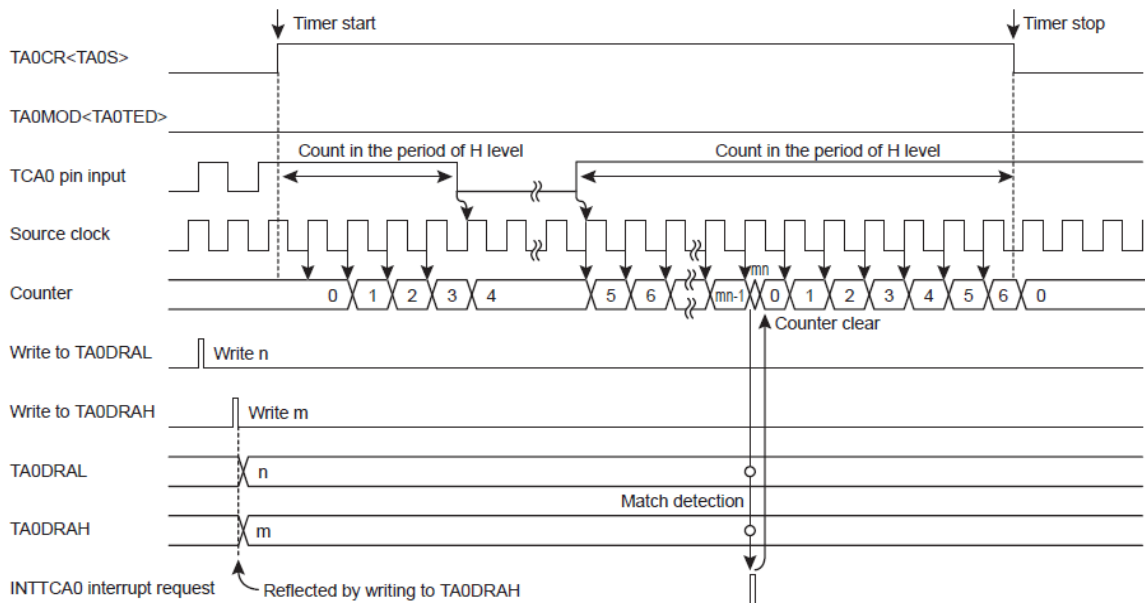

During the H-level counting (TA0MOD<TA0TED>="0")  
**Figure 10.29 Window Mode Timing Chart**

**10.6.3.5 Pulse Width Measurement Mode**

In the pulse width measurement mode, the up counter starts counting at the rising/falling edge(s) of the input to the TCA0 pin and measures the input pulse width based on the internal clock.

**(a) Setting**

Setting the operation mode selection TA0MOD <TA0M> to "110" activates the pulse width measurement mode. Select the source clock at TA0MOD <TA0CK>.

Select the trigger edge at the trigger edge input selection TA0MOD <TA0TED>. Setting TA0MOD <TA0TED> to "0" selects the rising edge, and setting it to "1" selects the falling edge as a trigger to start the capture.

The operation after capturing is determined by the pulse width measurement mode control TA0MOD <TA0MCAP>. Setting TA0MOD <TA0MCAP> to "0" selects the double-edge capture. Setting TA0MOD <TA0MCAP> to "1" selects the single-edge capture.

The operation to be executed in case of an overflow of the up counter can be selected at the overflow interrupt control TA0CR <TA0OVE>. Setting TA0OVE to "1" makes an INTTCA0 interrupt request occur in case of an overflow. Setting TA0OVE to "0" makes no INTTCA0 interrupt request occur in case of an overflow.

Note that this mode uses the TA0 input pin, and the TCA0 pin must be set to the input mode beforehand in port settings.

The operation is started by setting TA0CR <TA0S> to "1". In this time, TA0DRA and TA0DRB register are initialized to "0x0000". After the timer is started, writing to TA0MOD and TA0CR <TA0OVE> is disabled. Be sure to complete the required mode settings before starting the timer.

#### (b) Operation


After the timer is started, when the selected trigger edge (start edge) is input to the TCA0 pin, INTTCA0 interrupt request is generated, and then the up counter increments according to the selected source clock. Subsequently, when the edge opposite to the selected edge is detected, the up counter value is captured into TA0DRB, an INTTCA0 interrupt request is generated, and TA0SR <TA0CPF> is set to "1". Depending on the TA0MOD <TA0MCAP> setting, the operation differs as follows:

##### 1. Double-edge capture (When TA0MOD <TA0MCAP> is "0")

The up counter continues counting up after the edge opposite to the selected edge is detected. Subsequently, when the selected trigger edge is input, the up counter value is captured into TA0DRA, an INTTCA0 interrupt request is generated, and TA0SR <TA0CPFA> is set to "1". At this time, the up counter is cleared to "0x0000".

##### 2. Single-edge capture (When TA0MOD <TA0MCAP> is "1")

The up counter stops counting up and is cleared to "0x0000" when the edge opposite to the selected edge is detected. Subsequently, when the start edge is input, INTTCA0 interrupt request is generated, and then the up counter restarts increment.

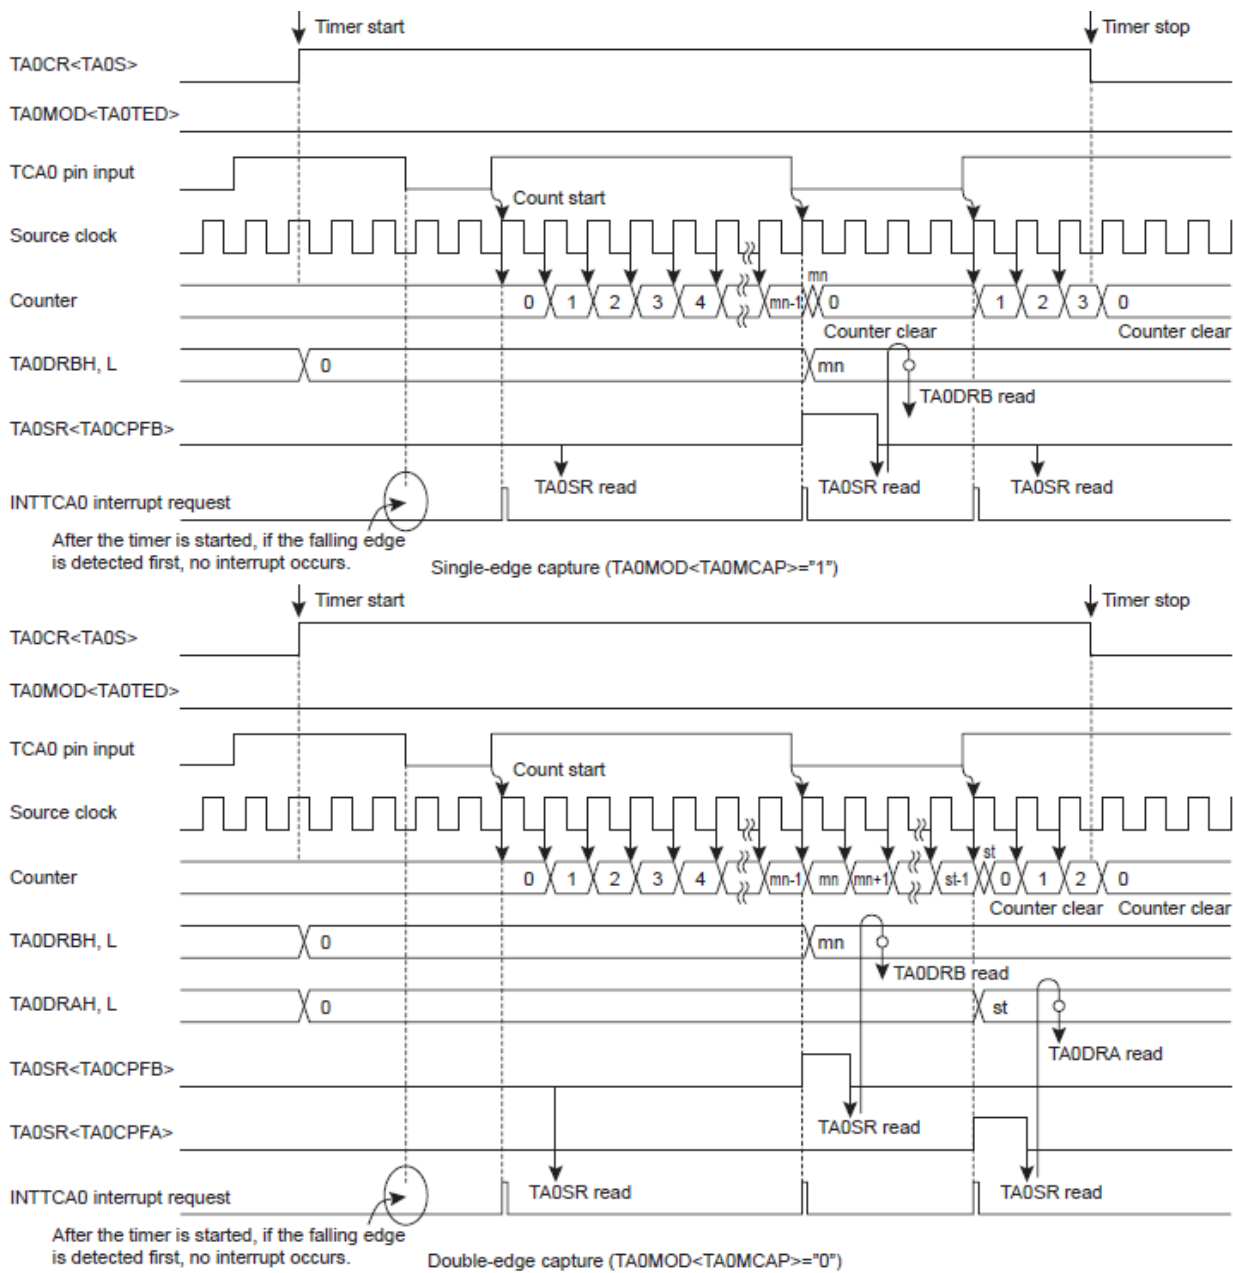

**Figure 10.30 Pulse Width Measurement Mode Timing Chart**

When the up counter overflows during capturing, the overflow flag TA0SR <TA0OVF> is set to "1". At this time, an INTTCA0 interrupt request occurs if the overflow interrupt control TA0CR <TA0OVE> is set to "1".

The capture completion flags (TA0SR <TA0CPFA, TA0CPFB> and the overflow flag (TA0SR <TA0OVF>) are cleared to "0" automatically when TA0SR is read.

The captured value must be read from TA0DRB (and also from TA0DRA for the double-edge capture) before the next trigger edge is detected. If the captured value is not read, it becomes


undefined. TA0DRA and TA0DRB must be read by using a 16-bit access instruction.

Setting TA0CR <TA0S> to "0" during the timer operation causes the up counter to stop counting and be cleared to "0x0000".

*Note): After the timer is started, if the edge opposite to the selected trigger edge is detected first, no capture is executed and no INTTCA0 interrupt request occurs. In this case, the capture starts when the selected trigger edge is detected next.*

**(c) Capture Process**

Figure 10.31 shows an example of the capture process for INTTCA0 interrupt subroutine. The capture edge or overflow state can be easily judged by status register (TA0SR).

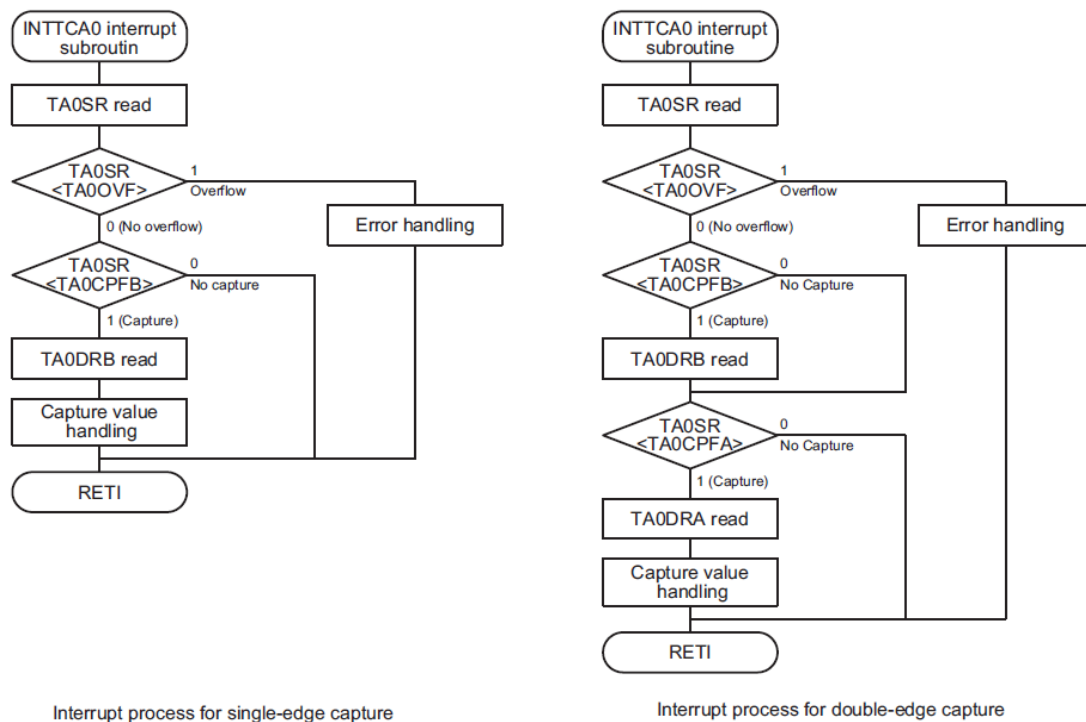

**Figure 10.31 Example of Capture Process**

**10.6.3.6 Programmable pulse generate (PPG) mode**

In the PPG output mode, an arbitrary duty pulse is output by two timer registers.

**(a) Setting**

Setting the operation mode selection TA0MOD <TA0M> to "011" activates the PPG output mode. Select the source clock at TA0MOD <TA0CK>. Select continuous or one-shot PPG output at TA0CR <TA0MPPG>.

Set the PPG output cycle at TA0DRA and set the time until the output is reversed first at TA0DRB. Be sure to set register values so that TA0DRA is larger than TA0DRB. Note that this mode uses the PPGA0B pin. The PPGA0B pin must be set to the output mode beforehand in port settings.

Set the initial state of the PPGA0B pin at the timer flip-flop TA0CR <TA0TFF>. Setting TA0CR <TA0TFF> to "1" selects the "H" level as the initial state of the PPGA0B pin. Setting TA0CR <TA0TFF> to "0" selects the "L" level as the initial state of the PPGA0B pin.

The operation is started by setting TA0CR<TA0S> to "1". After the timer is started, writing to TA0MOD and TA0CR <TA0OVE, TA0TFF> is disabled. Be sure to complete the required mode settings before starting the timer.

#### (b) Operation

After the timer is started, the up counter increments.

When a match between the up counter value and the value set to timer register B (TA0DRB) is detected, the PPGA0B pin is changed to the "H" level if TA0CR <TA0TFF> is "0", or the PPGA0B pin is changed to the "L" level if TA0CR <TA0TFF> is "1".

Subsequently, the up counter continues counting. When a match between the up counter value and the value set to timer register A (TA0DRA) is detected, the PPGA0B pin is changed to the "L" level if TA0CR <TA0TEFF> is "0", or the PPGA0B pin is changed to the "H" level if TA0CR <TA0TFF> is "1". At this time, an INTTCA0 interrupt request occurs. If the PPG output control TA0CR <TA0MPPG> is set to "1" (one-shot), TA0CR <TA0S> is automatically cleared to "0" and the timer stops.

If TA0CR <TA0MPPG> is set to "0" (continuous), the up counter is cleared to "0x0000" and continues counting and PPG output. When TA0CR <TA0S> is set to "0" (including the auto stop by the one-shot operation) during the PPG output, the PPGA0B pin returns to the level set in TA0CR<TA0TFF>.

TA0CR <TA0MPPG> can be changed during the operation. Changing TA0CR <TA0MPPG> from "1" to "0" during the operation cancels the one-shot operation and enables the continuous operation. Changing TA0CR<TA0MPPG> from "0" to "1" during the operation clears TA0CR<TA0S> to "0" and stops the timer automatically after the current pulse output is completed.

Timer registers A and B can be set to the double buffer. Setting TA0CR <TA0DBF> to "1" enables the double buffer. When the values set to TA0DRA and TA0DRB are changed during the PPG output with the double buffer enabled, the writing to TA0DRA and TA0DRB will not immediately become effective but will become effective when a match between TA0DRA and the up counter is detected. If the double buffer is disabled, the writing to TA0DRA and TA0DRB will become effective immediately. If the written value is smaller than the up counter value, the up counter overflows. After a cycle, the counter match process is executed to reverse the

output.

### (c) Register Buffer Configuration

#### 1. Temporary Buffer

MQ6905 contains an 8-bit temporary buffer. When a write instruction is executed on TA0DRAL (TA0DRBL), the data is first stored into this temporary buffer, whether the double buffer is enabled or disabled. Subsequently, when a write instruction is executed on TA0DRAH (TA0DRBH), the set value is stored into the double buffer or TA0DRAH (TA0DRBH). At the same time, the set value in the temporary buffer is stored into the double buffer or TA0DRAL (TA0DRBL). (This structure is designed to enable the set values of the lower-level register and the higher-level register simultaneously.) Therefore, when setting data to TA0DRA (TA0DRB), be sure to write the data into TA0DRAL and TA0DRAH (TA0DRBL and TA0DRBH) in this order.

#### 2. Double Buffer

In MQ6905, the double buffer can be used by setting TA0CR <TA0DBF>. Setting TA0CR <TA0DBF> to "0" disables the double buffer. Setting TA0CR <TA0DBF> to "1" enables the double buffer.

##### - When the double buffer is enabled

When a write instruction is executed on TA0DRAH (TA0DRBH) during the timer operation, the set value is first stored into the double buffer, and TA0DRAH/L are not updated immediately. TA0DRAH/L (TA0DRBH/L) compare the last set values to the counter value.

If a match is detected, an INTTCA0 interrupt request is generated and the double buffer set value is stored into TA0DRAH/L (TA0DRBH/L). Subsequently, the match detection is executed using a new set value.

When a read instruction is executed on TA0DRAH/L (TA0DRBH/L), the double buffervalue (the last set value) is read, not the TA0DRAH/L (TA0DRBH/L) values (the current effectivevalues).

When a write instruction is executed on TA0DRAH/L (TA0DRBH/L) while the timer is stopped, the set value is immediately stored into both the double buffer and TA0DRAH/L (TA0DRBH/L).

##### - When the double buffer is disabled

When a write instruction is executed on TA0DRAH (TA0DRBH) during the timer operation, the set value is immediately stored in TA0DRAH/L (TA0DRBH/L). Subsequently, the match detection is executed using a new set value.

If the values set to TA0DRAH/L (TA0DRBH/L) are smaller than the up counter value, the up counter overflows and the match detection is executed using a

new set value. As a result, the output pulse width may be longer than the set time. If that is a problem, enable the double buffer.

When a write instruction is executed on TA0DRAH/L (TA0DRBH/L) while the timer is stopped, the set value is immediately stored into TA0DRAH/L (TA0DRBH/L).

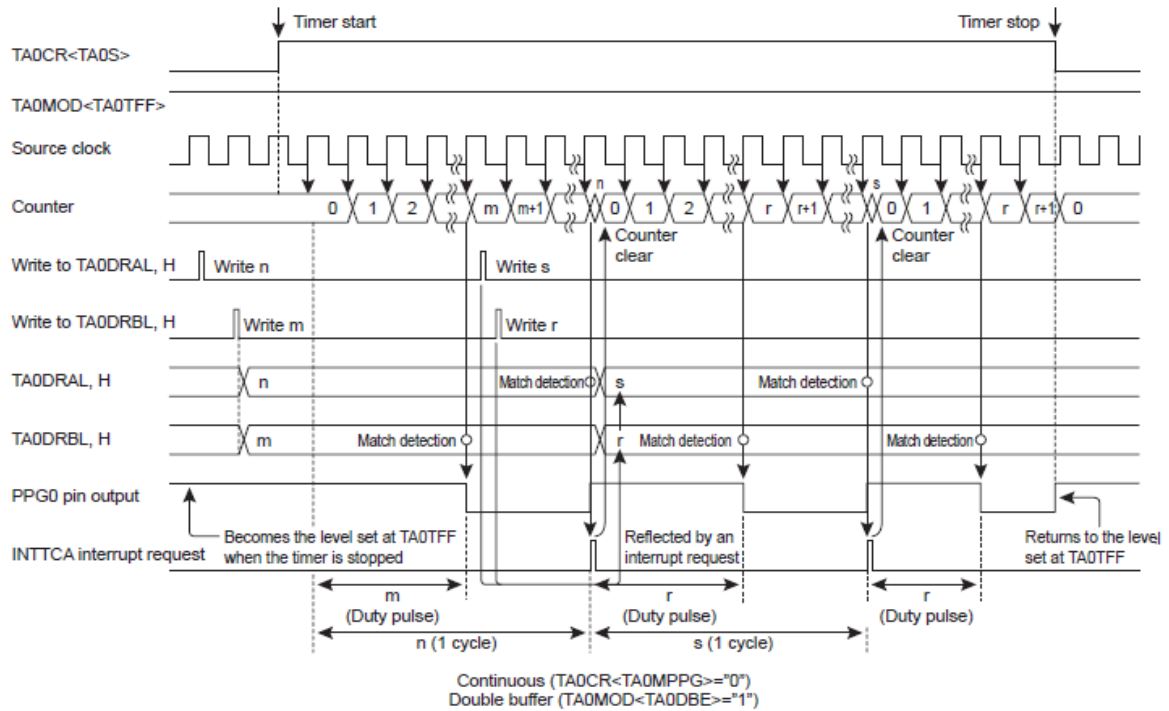


Figure 10.32 PPG Mode Timing Chart - Continuous

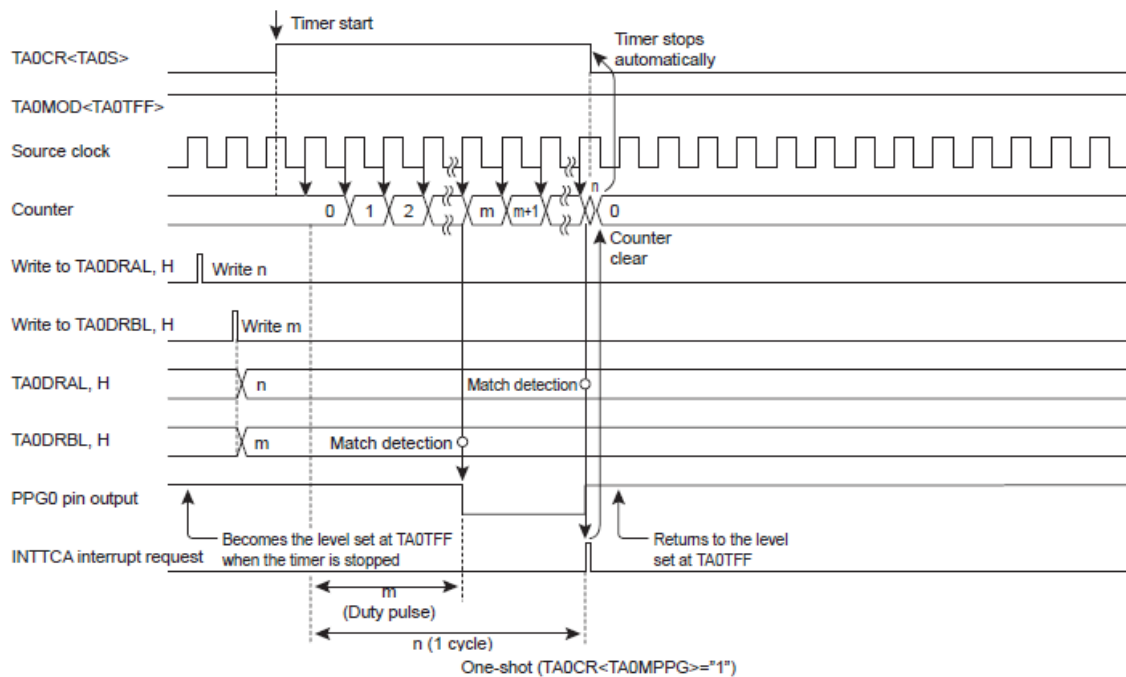


Figure 10.32 PPG Mode Timing Chart - One Shot

#### 10.6.4 Noise Canceller

The digital noise canceller can be used in the operation modes that use the TCA0 pin.

When the digital noise canceller is used, the input level is sampled at the sampling intervals set at TA0CR <TA0NC>. When the same level is detected three times consecutively, the level of the input to the timer is changed.

Setting TA0CR <TA0NC> to any values than "00" allows the noise canceller to start operation, regardless of the TA0CR <TA0S> value.

When the noise canceller is used, allow the timer to start after a period of time that is equal to four times the sampling interval after TA0CR <TA0NC> is set has elapsed. This stabilizes the input signal. Set TA0CR <TA0NC> while the timer is stopped (TA0CR <TA0S> = "0"). When TA0CR <TA0S> is "1", writing is ignored.

In the SLOW 1/2 or SLEEP 1 mode, setting TA0CR <TA0NC> to "11" selects  $f_s/2$  as the source clock for the operation. Setting TA0CR <TA0NC> to "00" disables the noise canceller. Setting TA0CR <TA0NC> to "01" or "10" disables the TCA0 pin input.

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

## 11. Asynchronous Serial Interface (UART)

MQ6905 contains 1 channels of asynchronous serial interfaces (UART). This chapter describes asynchronous serial interface 1 (UART1), as shown in Table 11.1 and Table 11.2.

	UARTxCR1 (Address)	UARTxCR2 (Address)	UARTxDR (Address)	UARTxSR (Address)	RDxBUF (Address)	TDxBUF (Address)
UART0	UART0CR1 (0x001A)	UART0CR2 (0x001B)	UART0DR (0x001C)	UART0SR (0x001D)	RD0BUF (0x001E)	TD0BUF (0x001E)
UART1	UART1CR1 (0x0F54)	UART1CR2 (0x0F55)	UART1DR (0x0F56)	UART1SR (0x0F57)	RD1BUF (0x0F58)	TD1BUF (0x0F58)
UART2	UART2CR1 (0x0F5A)	UART2CR2 (0x0F5B)	UART2DR (0x0F5C)	UART2SR (0x0F5D)	RD2BUF (0x0F5E)	TD2BUF (0x0F5E)

Table 11.1 SFR Address Assignment

	Serial Data Input Pin	Serial Data Output Pin
UART0	RXD0 pin	TXD0 pin
UART1	RXD1 pin	TXD1 pin
UART2	RXD2 pin	TXD2 pin

Table 11.2 Pin Names

### 11.1 Control

UART0 is controlled by the low power consumption registers (POFFCR1), UART0 control registers 1 and 2 (UART0CR1 and UART0CR2) and the UART0 baud rate register (UART0DR). The operating status can be monitored using the UART status register (UART0SR).

#### Low Power Consumption Register 1

POFFCR1 (0x0F75)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	SBI0EN	-	UART2EN	UART1EN	UART0EN
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

SBI0EN	I2C0 control	0: Disable 1: Enable
UART2EN	UART2 control	0: Disable 1: Enable
UART1EN	UART1 control	0: Disable 1: Enable
UART0EN	UART0 control	0: Disable 1: Enable

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

**UART0 Control Register 1**

UART0CR1 (0x001A)	7	6	5	4	3	2	1	0
Bit Symbol	TXE	RXE	STOPBT	EVEN	PE	IRDASEL	BRG	-
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R
After reset	0	0	0	0	0	0	0	0

TXE	Transmit operation	0: Disable 1: Enable		
RXE	Receive operation	0: Disable 1: Enable		
STOPBT	Transmit stop bit length	0: 1 bit 1: 2 bits		
TA0MCP	Pulse width measurement mode control	0: Double edge capture 1: Single edge capture		
EVEN	Parity selection	0: Odd-numbered parity 1: Even number parity		
PE	Parity addition	0: No parity 1: Parity added		
IRDASEL	TXD pin output selectin	0: UART output 1: IrDA output		
BRG	Transfer base clock selection		When SYSCR2<SYSCK> is "0"	When SYSCR2<SYSCK> is "1"
		0	fcgck	fs
		1	TCA0 output	

Note 1): fcgck, Gear clock; fs, Low-frequency clock

Note 2): If the TXE or RXE bit is set to "0" during the transmission or receiving of data, the operation is not disabled until the data transfer is completed. At this time, the data stored in the transmit data buffer is discarded.

Note 3): EVEN, PE and BRG settings are common to transmission and receiving.

Note 4): Set RXE and TXE to "0" before changing BRG.

Note 5): When BRG is set to the TCA0 output, the RT clock becomes asynchronous and the start bit of the transmitted/received data may get shorter by a maximum of  $(UART1DR+1)/(Transfer\ base\ clock\ frequency)[s]$ . If the pin is not used for the TCA0 output, control the TCA0 output by using the port function control register.

Note 6): To prevent STOPBT, EVEN, PE, IRDASEL and BRG from being changed accidentally during the UART communication, the register cannot be rewritten during the UART operation. For details, refer to "11.3 Protection to Prevent UART1CR1 and UART1CR2 Registers from Being Changed".

Note 7): When the STOP, IDLE0 or SLEEP0 mode is activated, TXE and RXE are cleared to "0" and the UART stops. Other bits keep their values.

**UART0 Control Register 2**

UART0CR2 (0x001B)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	RTSEL			RXDNC		STOPBR
Read/Write	R	R	R/W			R/W		R/W
After reset	0	0	0	0	0	0	0	0

RTSEL	Selects the number of RT clocks		Odd-numbered bits of transfer frame	Even-numbered bits of transfer frame
-------	---------------------------------	--	-------------------------------------	--------------------------------------

		000	16 clocks	16 clocks
		001	16 clocks	17 clocks
		010	15 clocks	15 clocks
		011	15 clocks	16 clocks
		100	17 clocks	17 clocks
		101	Reserved	
		11*	Reserved	
RXDNC	Selects the RXD input noise rejection time (Time of pulses to be removed as noise)	00: No noise rejection 01: $1 \times (\text{UART1DR} + 1) / (\text{Transfer base clock frequency})$ [s] 10: $2 \times (\text{UART1DR} + 1) / (\text{Transfer base clock frequency})$ [s] 11: $4 \times (\text{UART1DR} + 1) / (\text{Transfer base clock frequency})$ [s]		
STOPBR	Receive stop bit length	0: 1 bit 1: 2 bits		

Note 1): When a read instruction is executed on UART1CR2, bits 7 and 6 are read as "0".

Note 2): RTSEL can be set to two kinds of RT clocks for the even- and odd-numbered bits of the transfer frame. For details, refer to "11.7.1 Transfer baud rate calculation method".

Note 3): For details of the RXDNC noise rejection time, refer to "11.9 Received Data Noise Rejection".

Note 4): When the STOP, IDLE0 or SLEEP0 mode is activated, the UART stops automatically but each bit value of UART1CR2 remains unchanged.

Note 5): When STOPBR is set to 2 bits, the first bit of the stop bits (during data receiving) is not checked for a framing error.

Note 6): To prevent RTSEL, RXDNC and STOPBR from being changed accidentally during the UART communication, the register cannot be rewritten during the UART operation. For details, refer to "11.3 Protection to Prevent UART1CR1 and UART1CR2 Registers from Being Changed".

#### UART0 Baud Rate Register

UART1DR (0x001C)	7	6	5	4	3	2	1	0
Bit Symbol	UART1DR7	UART1DR6	UART1DR5	UART1DR4	UART1DR3	UART1DR2	UART1DR1	UART1DR0
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
After reset	0	0	0	0	0	0	0	0

Note 1): Set UART1CR1<RXE> and UART1CR1<TXE> to "0" before changing UART1DR. For the set values, refer to "11.7 Transfer Baud Rate".

Note 2): When UART1CR1<BRG> is set to the TCA0 output, the value set to UART1DR has no meaning.

Note 3): When the STOP, IDLE0 or SLEEP0

#### UART0 Status Register

UART0ISR (0x001D)	7	6	5	4	3	2	1	0
Bit Symbol	PERR	FERR	OERR	-	RBSY	RBFL	TBSY	TBFL
Read/Write	R	R	R	R	R	R	R	R
After reset	0	0	0	0	0	0	0	0

PERR	Parity error flag	0: No parity error 1: Parity error
RFERR	Framing error flag	0: No framing error 1: Framing error

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

OERR	Overrun error flag	0: No overrun error 1: Overrun error
RBSY	Receive busy flag	0: Before receiving or end of receiving 1: On receiving
RBFL	Receive buffer full flag	0: Receive buffer empty 1: Receive buffer full
TBSY	Transmit busy flag	0: Before transmission or end of transmission 1: On transmission
TBFL	Transmit buffer full flag	0: Transmit buffer empty 1: Transmit buffer full

Note 1): TBFL is cleared to "0" automatically after an INTTXD1 interrupt request is generated, and is set to "1" when data is set to TD1BUF.

Note 2): When a read instruction is executed on UART1SR, bit 4 is read as "0".

Note 3): When the STOP, IDLE0 or SLEEP0 mode is activated, each bit of UART1SR is cleared to "0" and the UART stops.

#### UART0 Receive Data Register

<b>RD0BUF (0x001E)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	RD0DR7	RD0DR6	RD0DR5	RD0DR4	RD0DR3	RD0DR2	RD0DR1	RD0DR0
Read/Write	R	R	R	R	R	R	R	R
After reset	0	0	0	0	0	0	0	0

Note): When the STOP, IDLE0 or SLEEP0 mode is activated, the RD1BUF values become undefined. If received data is required, read it before activating the mode.

#### UART0 Transmit Data Register

<b>TD0BUF (0x001E)</b>	<b>7</b>	<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>	<b>0</b>
Bit Symbol	TD0DR7	TD0DR6	TD0DR5	TD0DR4	TD0DR3	TD0DR2	TD0DR1	TD0DR0
Read/Write	W	W	W	W	W	W	W	W
After reset	0	0	0	0	0	0	0	0

Note): When the STOP, IDLE0 or SLEEP0 mode is activated, the TD1BUF values become undefined.

## 11.2 Low Power Consumption Function

UART1 has a low power consumption register (POFFCR1) that saves power consumption when the UART function is not used.

Setting POFFCR1 <UART1EN> to "0" disables the basic clock supply to UART1 to save power. Note that this renders the UART unusable. Setting POFFCR1 <UART1EN> to "1" enables the basic clock supply to UART1 and renders the UART usable.

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

After reset, POFFCR1 <UART1EN> is initialized to "0", and this renders the UART unusable. When using the UART for the first time, be sure to set POFFCR1 <UART1EN> to "1" in the initial setting of the program (before the UART control register is operated).

Do not change POFFCR1 <UART1EN> to "0" during the UART operation, otherwise UART1 may operate unexpectedly.

### 11.3 Protection of UART1CR1 and UART1CR2 Registers from Being Changed

MQ6905 has a function that protects the registers from being changed so that the UART communication settings (for example, stop bit and parity) are not changed accidentally during the UART operation.

Specific bits of UART1CR1 and UART1CR2 can be changed only under the conditions shown in Table 11.3. If a write instruction is executed on the register when it is protected from being changed, the bits remain unchanged and keep their previous values.

Bit to be changed	Function	Conditions that allow the bit to be changed			
		UART0CR1 <TXE>	UART0SR <TBSY>	UART0CR1 <RXE>	UART0SR <RBSY>
UART0CR1<STOPBT>	Transmit stop bit length	Both of these bits are "0"		-	-
UART0CR1<EVEN>	Parity selection	All of these bits are "0"			
UART0CR1<PE>	Parity addition				
UART0CR1<IRDASEL>	TXD pin output selection	Both of these bits are "0"		-	-
UART0CR1<BRG>	Transfer base clock selection	All of these bits are "0"			
UART0CR2<RTSEL>	Selection of number of RT clocks				
UART0CR2<RXDNC>	Selection of RXD pin input noise rejection time	-	-	Both of these bits are "0"	
UART0CR2<STOPBR>	Receive stop bit length				

Table 11.3 Changing of UART1CR1 and UART1CR2

### 11.4 Activation of STOP, IDLE0 or SLEEP0 Mode

#### 11.4.1 Transition of Register Status

When the STOP, IDLE0 or SLEEP0 mode is activated, the UART stops automatically and each register becomes the status as shown in Table 11.4. For the registers that do not hold their values, make settings again as needed after the operation mode is recovered.

	7	6	5	4	3	2	1	0
UART0CR1	TXE	RXE	STOPBT	EVEN	PE	IRDASEL	BRG	-
	Cleared to 0	Cleared to 0	Hold the value	Hold the value	Hold the value	Hold the value	Hold the value	-
UART0CR2	-	-	RTSEL			RXDNC		STOPBR
	-	-	Hold the value	Hold the value	Hold the value	Hold the value	Hold the value	Hold the value
UART0SR	PERR	FERR	OERR	-	RBSY	RBFL	TBSY	TBFL
	Cleared to 0	Cleared to 0	Cleared to 0	-	Cleared to 0	Cleared to 0	Cleared to 0	Cleared to 0
UART0DR	UART0DR7	UART0DR6	UART0DR5	UART0DR4	UART0DR3	UART0DR2	UART0DR1	UART0DR0
	Hold the value	Hold the value	Hold the value	Hold the value	Hold the value	Hold the value	Hold the value	Hold the value
RD0BUF	RD0DR7	RD0DR6	RD0DR5	RD0DR4	RD0DR3	RD0DR2	RD0DR1	RD0DR0
	Indeterminate	Indeterminate	Indeterminate	Indeterminate	Indeterminate	Indeterminate	Indeterminate	Indeterminate
TD0BUF	TD0DR7	TD0DR6	TD0DR5	TD0DR4	TD0DR3	TD0DR2	TD0DR1	TD0DR0
	Indeterminate	Indeterminate	Indeterminate	Indeterminate	Indeterminate	Indeterminate	Indeterminate	Indeterminate

Table 11.4 Transition of Register Status

### 11.4.2 Transition of TXD Pin Status

When the IDLE0, SLEEP0 or STOP mode is activated, the TXD pin reverts to the status shown in Table 11.5, whether data is transmitted/received or the operation is stopped.

UART0CR1 <IRDASEL>	IDLE0 or SLEEP0 mode	STOP mode	
		SYSCR1<OUTEN>="1"	SYSCR1<OUTEN>="0"
"0"	H level	H level	Hi-Z
"1"	L level	L level	

Table 11.5 TXD Pin Status When the STOP, IDLE0 or SLEEP0 Mode Is Activated

## 11.5 Transfer Data Format

The UART transfers data composed of the following four elements. The data from the start bit to the stop bit is collectively defined as a "transfer frame". The start bit consists of 1 bit (L level) and the data consists of 8 bits. Parity bits are determined by UART1CR1 <PE> that selects the presence or absence of parity and UART1CR1 <EVEN> that selects even- or odd-numbered parity. The bit length of the stop bit can be selected at UART1CR1 <STBT>.

Figure 11.1 shows the transfer data format.

- Start bit (1 bit)
- Data (8 bits)

- Parity bit (selectable from even-numbered, odd-numbered or no parity)
- Stop bit (selectable from 1 bit or 2 bits)

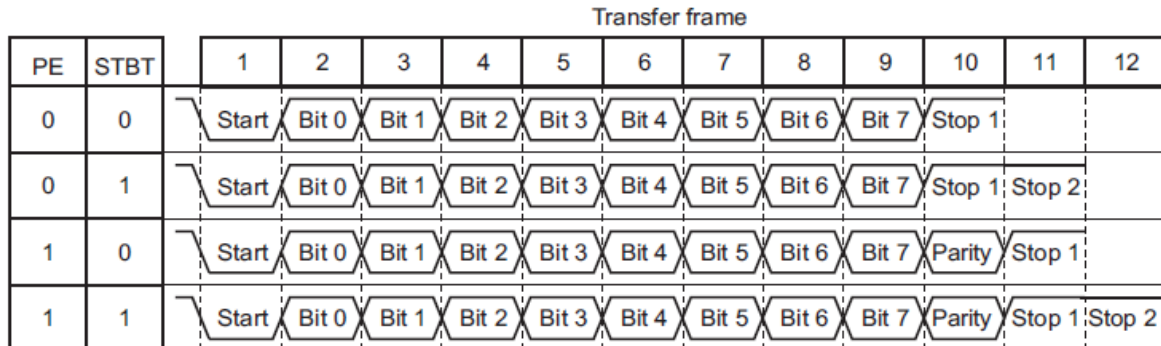


Figure 11.1 Transfer Data Format

## 11.6 Infrared Data Format Transfer Mode

The TXD1 pin can output data in the infrared data format (IrDA) by the setting of the IrDA output control register. Setting UART1CR1 <IRDASEL> to "1" allows the TXD1 pin to output data in the infrared data format.

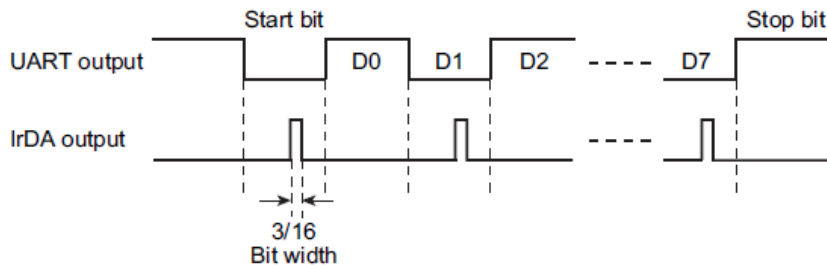


Figure 11.2 Example of Infrared Data Format (Comparison between Normal Output and Ir-DA Output)

## 11.7 Transfer Baud Rate

The transfer baud rate of UART is set by UART1CR1 <BRG>, UART1DR and UART1CR2 <RTSEL>. The settings of UART1DR and UART1CR2 <RTSEL> for general baud rates and operating frequencies are shown below. For independent calculation of transfer baud rates, refer to "11.7.1 Transfer baud rate calculation method".


Basic baud rate[baud]	Register	Operating frequency				
		16MHz	8MHz	4MHz	2MHz	1MHz
128000	UART0DR[7:0]	0x07	0x03	0x01	0x00	-
	RTSEL[2:0]	0y011	0y011	0y011	0y011	-
	Error	(+0.81%)	(+0.81%)	(+0.81%)	(+0.81%)	-
115200	UART0DR[7:0]	0x08	0x03	0x01	0x00	-
	RTSEL[2:0]	0y011	0y100	0y100	0y100	-
	Error	(-0.44%)	(+2.12%)	(+2.12%)	(+2.12%)	-
76800	UART0DR[7:0]	0x0C	0x06	0x02	-	-
	RTSEL[2:0]	0y000	0y010	0y100	-	-
	Error	(+0.16%)	(-0.79%)	(+2.12%)	-	-
62500	UART0DR[7:0]	0x0F	0x07	0x03	0x01	0x00
	RTSEL[2:0]	0y000	0y000	0y000	0y000	0y000
	Error	0%	0%	0%	0%	0%
57600	UART0DR[7:0]	0x11	0x08	0x03	0x01	0x00
	RTSEL[2:0]	0y011	0y011	0y100	0y100	0y100
	Error	(-0.44%)	(-0.44%)	(+2.12%)	(+2.12%)	(+2.12%)
38400	UART0DR[7:0]	0x19	0x0C	0x06	0x02	-
	RTSEL[2:0]	0y000	0y000	0y010	0y100	-
	Error	(+0.16%)	(+0.16%)	(-0.79%)	(+2.12%)	-
19200	UART0DR[7:0]	0x30	0x19	0x0C	0x06	0x02
	RTSEL[2:0]	0y100	0y000	0y000	0y010	0y100
	Error	(+0.04%)	(+0.16%)	(+0.16%)	(-0.79%)	(+2.12%)
9600	UART0DR[7:0]	0x64	0x33	0x19	0x0C	0x06
	RTSEL[2:0]	0y001	0y000	0y000	0y000	0y010
	Error	(+0.01%)	(+0.16%)	(+0.16%)	(+0.16%)	(-0.79%)
4800	UART0DR[7:0]	0xC9	0x67	0x33	0x19	0x0C
	RTSEL[2:0]	0y001	0y000	0y000	0y000	0y000
	Error	(+0.01%)	(+0.16%)	(+0.16%)	(+0.16%)	(+0.16%)
2400	UART0DR[7:0]	-	0xCF	0x67	0x33	0x19
	RTSEL[2:0]	-	0y000	0y000	0y000	0y000
	Error	-	(+0.16%)	(+0.16%)	(+0.16%)	(+0.16%)
1200	UART0DR[7:0]	-	-	0xCF	0x67	0x33
	RTSEL[2:0]	-	-	0y000	0y000	0y000
	Error	-	-	(+0.16%)	(+0.16%)	(+0.16%)

### 11.7.1 Transfer Baud Rate Calculation Method

The bit width of transmitted/received data can be finely adjusted by changing UART1CR2 <RTSEL>. The number of RT clocks per bit can be changed in a range of 15 to 17 clocks by changing UART1CR2<RTSEL>. The RT clock is the transfer base clock, which is the pulses obtained by counting the clock selected at UART1CR1<BRG> the number of times of (UART1DR set value) + 1. Especially, when UART1CR2 <RTSEL> is set to "0y001" or "0y011", two types of RT clocks alternate at each bit, so that the pseudo baud rates of RT × 15.5 clocks and RT × 16.5 clocks can be generated. The number of RT clocks per bit of transfer frame is shown in Figure 11.3.

For example, when fcgck is 4 [MHz], UART1CR2<RTSEL> is set to "0y000" and UART1DR is set to "0x19", the baud rate calculated using the formula in Figure 11.3 is expressed as:fcgck / (16 × (UART1DR + 1)) = 9615 [baud]

These settings generate a baud rate close to 9600 [baud] (+0.16%).

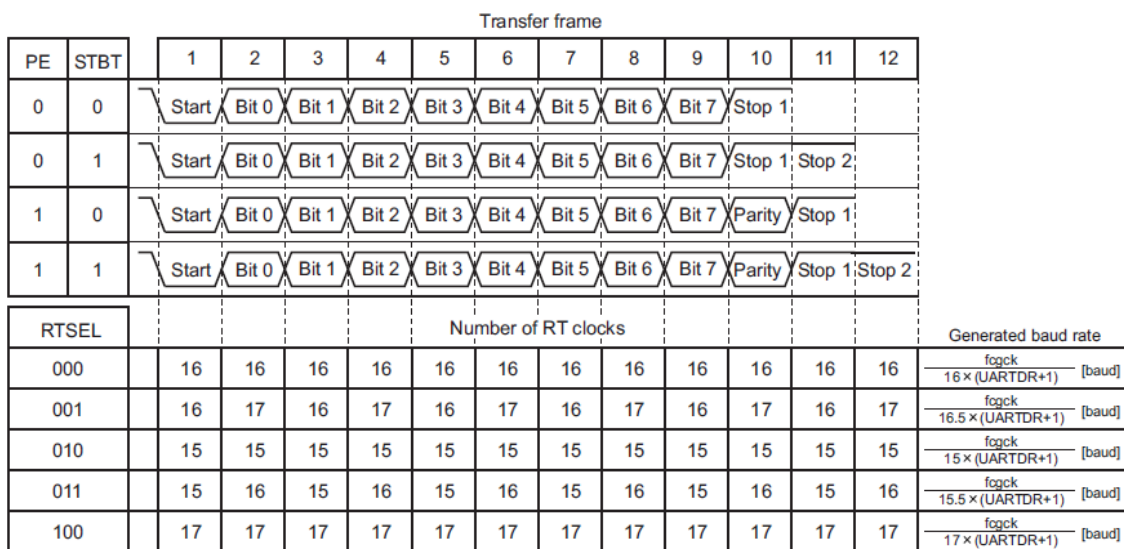

\*When BRG is set to fcgck

Figure 11.3 Fine Adjustment of Baud Rate Clock Using UART1 1R2 <RTSEL>

#### 11.7.1.1 Calculation of Set Values of UART1CR2 <RTSEL> and UART1DR

The set value of UART1DR for an operating frequency and baud rate can be calculated using the calculation formula shown in Figure 11.4. For example, to generate a basic baud rate of 38400 [baud] with fcgck=4 [MHz], calculate the set value of UART1DR for each setting of UART1CR2 <RTSEL> and compensate the calculated value to a positive number to obtain the generated baud rate as shown in Figure 11.5. Basically, select the set value of UART1CR2 <RTSEL> that has the smallest baud rate error from among the generated baud rates. In Figure 11.5, the setting of UART1CR2 <RTSEL>="0y010" has the smallest error among the calculated baud rates, and thus the generated baud rate is 38095 [baud] (-0.79%) against the basic baud rate of 38400 [baud].

*Note): The error from the basic baud rate should be accurate to within ±3%. Even if the error is within ±3%, the communication may fail due to factors such as frequency errors of external controllers (for example, a personal computer) and oscillators and the load capacity of the communication pin.*

RTSEL	UARTDR set value
000	$UARTDR = \frac{fcgck [Hz]}{16 \times A [baud]} - 1$
001	$UARTDR = \frac{fcgck [Hz]}{16.5 \times A [baud]} - 1$
010	$UARTDR = \frac{fcgck [Hz]}{15 \times A [baud]} - 1$
011	$UARTDR = \frac{fcgck [Hz]}{15.5 \times A [baud]} - 1$
100	$UARTDR = \frac{fcgck [Hz]}{17 \times A [baud]} - 1$

Figure 11.4 UART1DR Calculation Method (When BRG Is Set to fcgck)

RTSEL	UARTDR calculation	Generated baud rate
000	$UARTDR = \frac{4000000 [Hz]}{16 \times 38400 [baud]} - 1 \approx 6$	$\frac{4000000 [Hz]}{16 \times (6 + 1)} = 35714 [baud] (-6.99\%)$
001	$UARTDR = \frac{4000000 [Hz]}{16.5 \times 38400 [baud]} - 1 \approx 5$	$\frac{4000000 [Hz]}{16.5 \times (5 + 1)} = 40404 [baud] (+5.22\%)$
010	$UARTDR = \frac{4000000 [Hz]}{15 \times 38400 [baud]} - 1 \approx 6$	$\frac{4000000 [Hz]}{15 \times (6 + 1)} = 38095 [baud] (-0.79\%)$
011	$UARTDR = \frac{4000000 [Hz]}{15.5 \times 38400 [baud]} - 1 \approx 6$	$\frac{4000000 [Hz]}{15.5 \times (6 + 1)} = 36866 [baud] (-3.99\%)$
100	$UARTDR = \frac{4000000 [Hz]}{17 \times 38400 [baud]} - 1 \approx 5$	$\frac{4000000 [Hz]}{17 \times (5 + 1)} = 39216 [baud] (+2.12\%)$

Figure 11.5 Example of UART1DR Calculation

## 11.8 Data Sampling Method

The UART receive control circuit starts RT clock counting when it detects a falling edge of the input pulses to the RXD1 pin. 15 to 17 RT clocks are counted per bit and each clock is expressed as RTn (n=16 to 0). In a bit that has 17 RT clocks, RT16 to RT0 are counted. In a bit that has 16 RT clocks, RT15 to RT0 are counted. In a bit that has 15 RT clocks, RT14 to RT0 are counted (Decrement). During counting of RT8 to RT6, the UART receive control circuit samples the input pulses to the RXD1 pin to make a majority decision. The same level detected twice or more from among three samplings is processed as the data for the bit.

The number of RT clocks can be changed in a range of 15 to 17 by setting UART1CR2 <RTSEL>. However, sampling is always executed in RT8 to RT6, even if the number of RT clocks is changed (Figure 11.6).

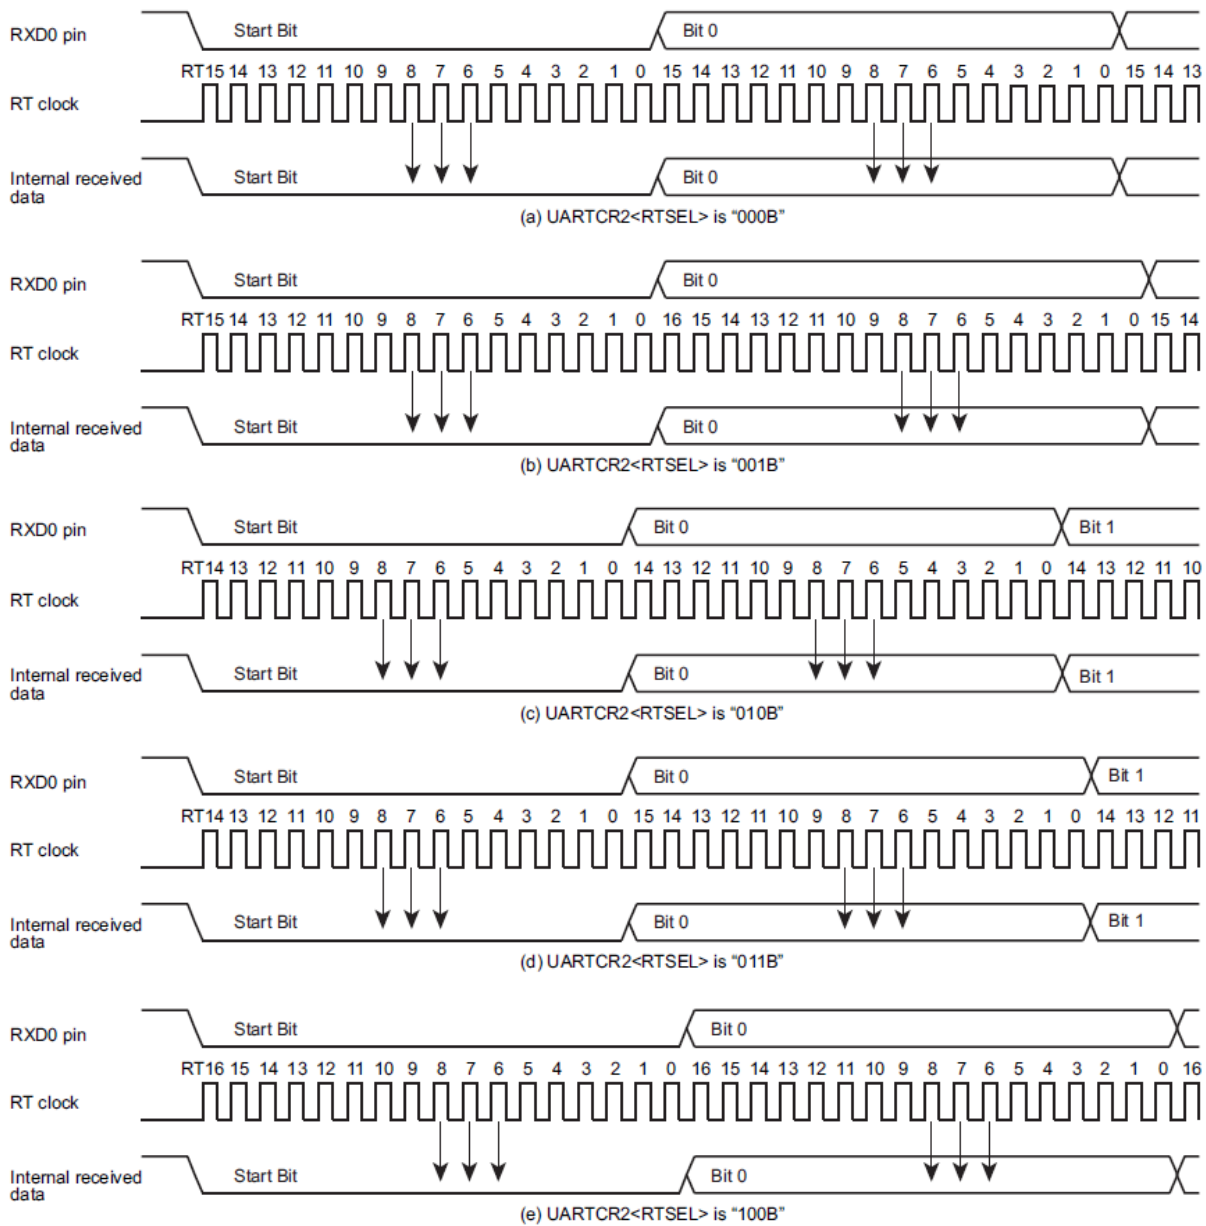


Figure 11.6 Data Sampling in Each Case of UART1CR2 <RTSEL>

If "1" is detected in sampling of the start bit, for example, due to the influence of noise, RT clock counting stops and the data receiving is suspended. Subsequently, when a falling edge is detected in the input pulses to the RXD1 pin, RT clock counting restarts and the data receiving restarts with the start bit.

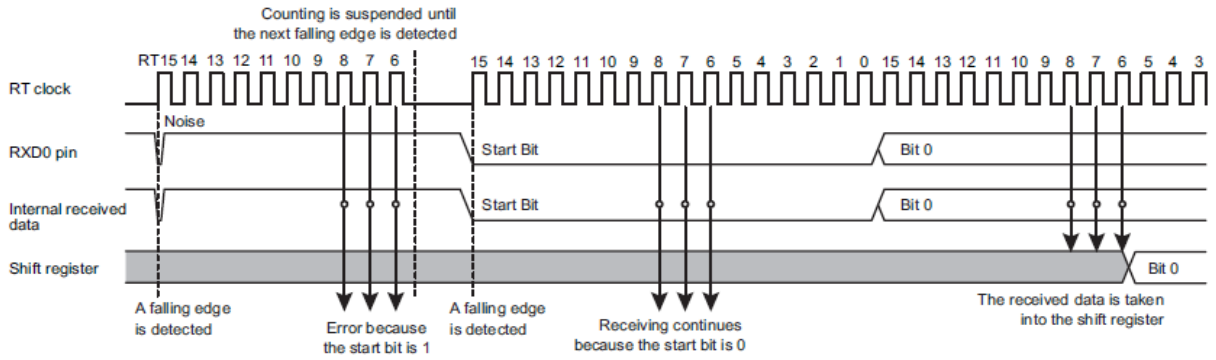


Figure 11.7 Start Bit Sampling

## 11.9 Received Data Noise Rejection

When noise rejection is enabled at UART1CR2 <RXDNC>, the time of pulses to be regarded as signals is as shown in Table 11.6.

RXDNC	Noise rejection time [s]	Time of pulses to be regarded as signals
00	No noise rejection	-
01	$(UART0DR+1)/(\text{Transfer base clock frequency})$	$2 \times (UART0DR+1)/(\text{Transfer base clock frequency})$
10	$2 \times (UART0DR+1)/(\text{Transfer base clock frequency})$	$4 \times (UART0DR+1)/(\text{Transfer base clock frequency})$
11	$4 \times (UART0DR+1)/(\text{Transfer base clock frequency})$	$8 \times (UART0DR+1)/(\text{Transfer base clock frequency})$

Table 11.6 Received Data Noise Rejection Time

Note): The transfer base clock frequency is the clock frequency selected at UARTCR1 <BRG>.

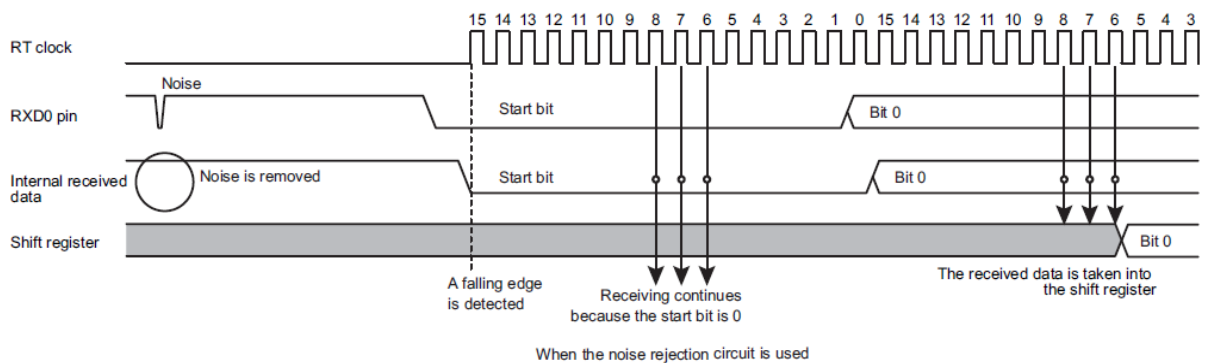


Figure 11.8 Received Data Noise Rejection

## 11.10 Transmit/Receive Operation

### 11.10.1 Data Transmit Operation

Set UART1CR1 <TXE> to "1". Check UART1SR <TBFL> = "0", and then write data into TD1BUF (transmit data buffer). Writing data into TD1BUF sets UART1SR<TBFL> to "1", transfers the data to the transmit shift register, and outputs the data sequentially from the TXD1 pin. The data output includes a start bit, stop bits whose number is specified in UART1CR1 <STBT> and a parity bit if parity addition is specified. Select the data transfer baud rate using UART1CR1 <BRG>, UART1CR2 <RTSEL> and UART1DR. When data transmission starts, the transmit buffer full flag UART1SR <TBFL> is cleared to "0" and an INTTXD1 interrupt request is generated.

*Note 1): After data is written into TD1BUF, if new data is written into TD1BUF before the previous data is transferred to the shift register, the new data is written over the previous data and is transferred to the shift register.*

*Note 2): Under the conditions shown in Table 11.7, the TXD1 pin output is fixed at the L or H level according to the setting of UART1CR1 <IRDASEL>.*

Condition	TXD0 pin output	
	IRDASEL="0"	IRDASEL="1"
When UART0CR1<TXE> is "0"	H level	L level
From when "1" is written to UART0CR1<TXE> to when the transmitted data is written to TD0BUF		
When the STOP, IDLE0 or SLEEP0 mode is active		

Table 11.7 TXD1 Pin Output

### 11.10.2 Data Receive Operation

Set UART1CR1 <RXE> to "1". When data is received via the RXD1 pin, the received data is transferred to RD1BUF (receive data buffer). At this time, the transmitted data includes a start bit, stop bit(s) and a parity bit if parity addition is specified. When the stop bit(s) are received, data only is extracted and transferred to RD1BUF (receive data buffer). Then the receive buffer full flag UART1SR <RBFL> is set and an INTRXD1 interrupt request is generated. Set the data transfer baud rate using UART1CR1 <BRG>, UART1CR2 <RTSEL> and UART1DR.

If an overrun error occurs when data is received, the data is not transferred to RD1BUF (receive data buffer) but discarded; data in the RD1BUF is not affected.

## 11.11 Transmit/Receive Operation

### 11.11.1 Parity Error

When the parity determined using the receive data bits differs from the received parity bit, the parity error flag UART1SR <PERR> is set to "1". At this time, an INTRXD1 interrupt request is generated.

If UART1SR <PERR> is "1" when UART1SR is read, UART1SR <PERR> will be cleared to "0" when RD1BUF is read subsequently. (The RD1BUF read value becomes undefined.)

If UART1SR <PERR> is set to "1" after UART1SR is read, UART1SR <PERR> will not be cleared to "0" when RD1BUF is read subsequently. In this case, UART1SR <PERR> will be cleared to "0" when UART1SR is read again and RD1BUF is read.

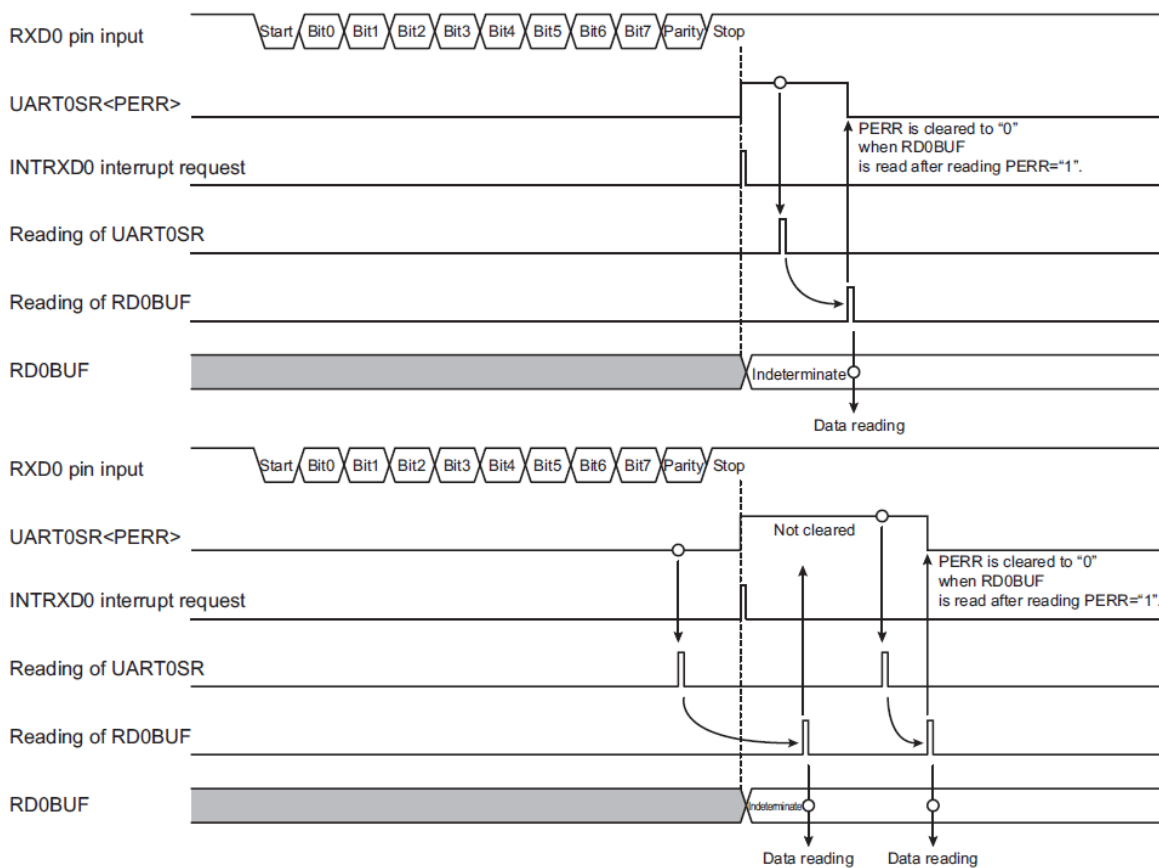


Figure 11.9 Occurrence of Parity Error

### 11.11.2 Framing Error

If the internal and external baud rates differ or "0" is sampled as the stop bit of received data due to the influence of noise on the RXD1 pin, the framing error flag UART1SR <FERR> is set to "1". At this time, an INTRXD1 interrupt request is generated.

If UART1SR <FERR> is "1" when UART1SR is read, UART1SR <FERR> will be cleared to "0" when RD1BUF is read subsequently.

If UART1SR <FERR> is set to "1" after UART1SR is read, UART1SR <FERR> will not be cleared to "0" when RD1BUF is read subsequently. In this case, UART1SR <FERR> will be cleared to "0" when UART1SR is read again and RD1BUF is read.

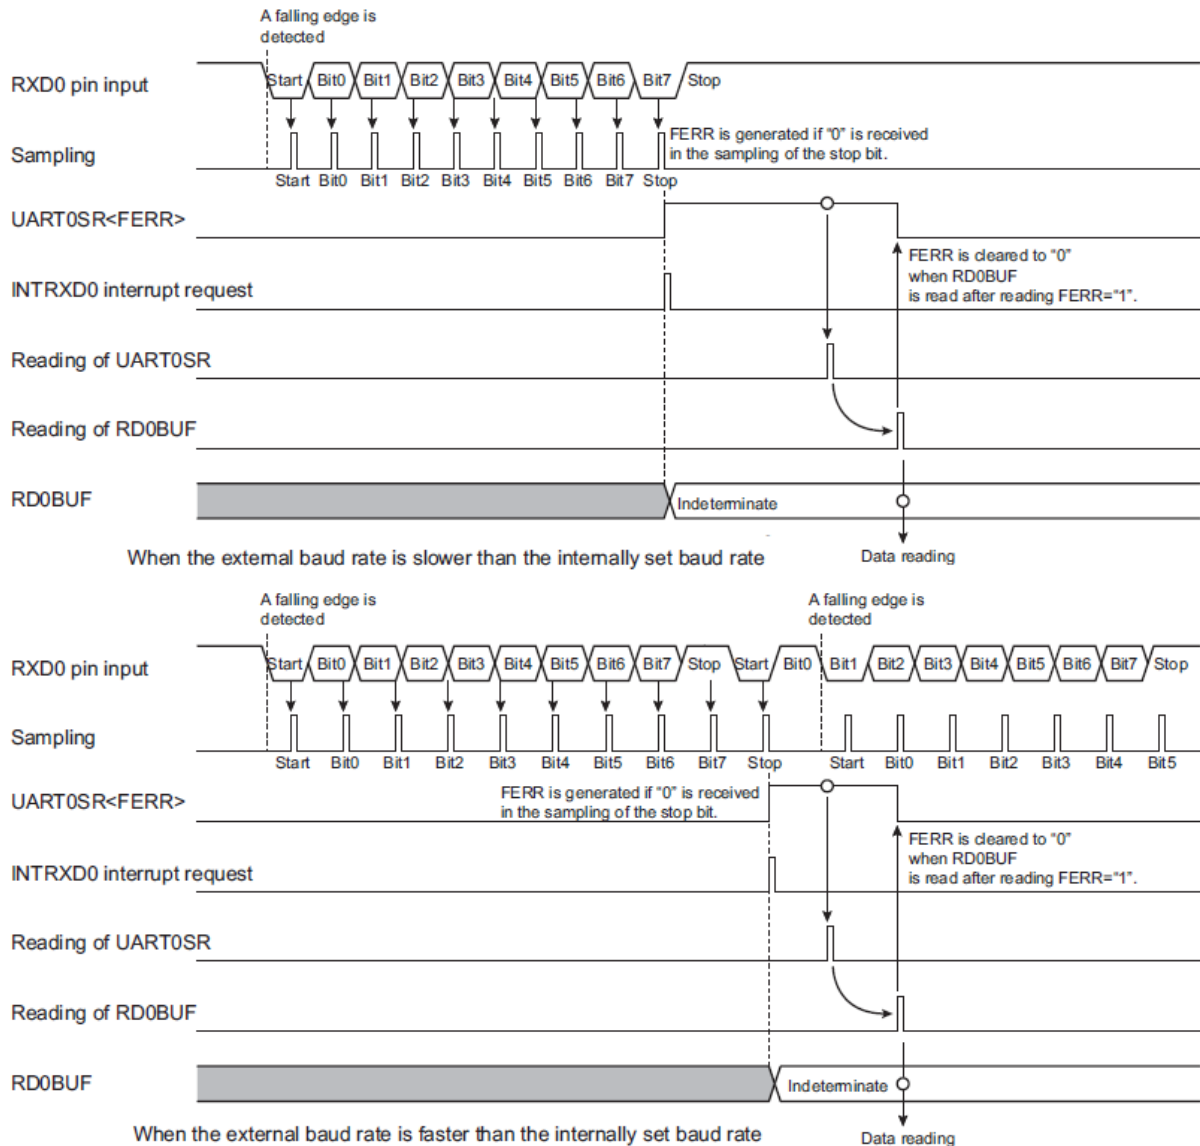


Figure 11.10 Occurrence of Framing Error

### 11.11.3 Overrun Error

If receiving of all data bits is completed before the previous received data is read from RD1BUF, the overrun error flag UART1SR <OERR> is set to "1" and an INTRXD1 interrupt request is generated. The data received at the occurrence of the overrun error is discarded and the previous received data is maintained. Subsequently, if data is received while UART1SR <OERR> is still "1", no INTRXD1 interrupt request is generated, and the received data is discarded. (Figure 11.11)


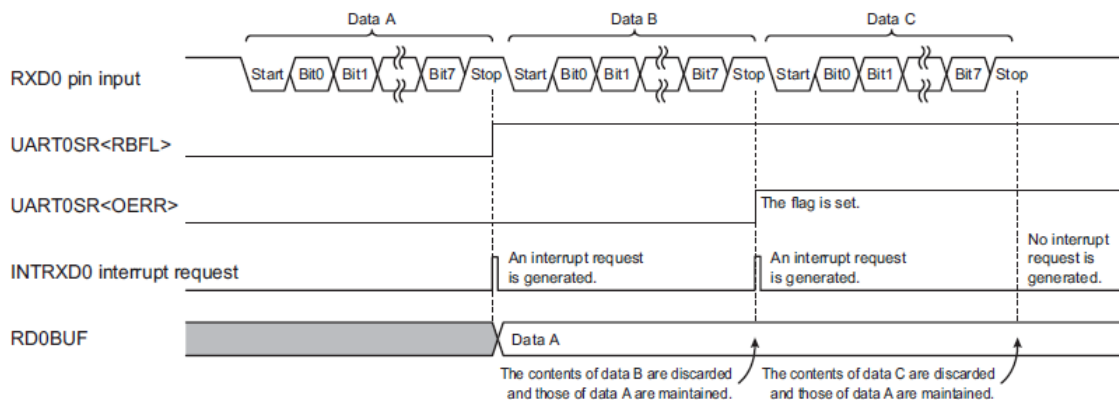


Figure 11.11 Generation of INTRXD1 Interrupt Request


Note that parity or framing errors in the discarded received data cannot be detected. (These error flags are not set.) That is to say, if these errors are detected together with an overrun error during the reading of UART1SR, they have occurred in the previous received data (the data stored in RD1BUF). (Figure 11.12)

If UART1SR <OERR> is "1" when UART1SR is read, UART1SR <OERR> will be cleared to "0" when RD1BUF is read subsequently. (Figure 11.13)

If UART1SR <OERR> is set to "1" after UART1SR is read, UART1SR <OERR> will not be cleared to "0" when RD1BUF is read subsequently. In this case, UART1SR <OERR> will be cleared to "0" when UART1SR is read again and RD1BUF is read. (Figure 11.13)

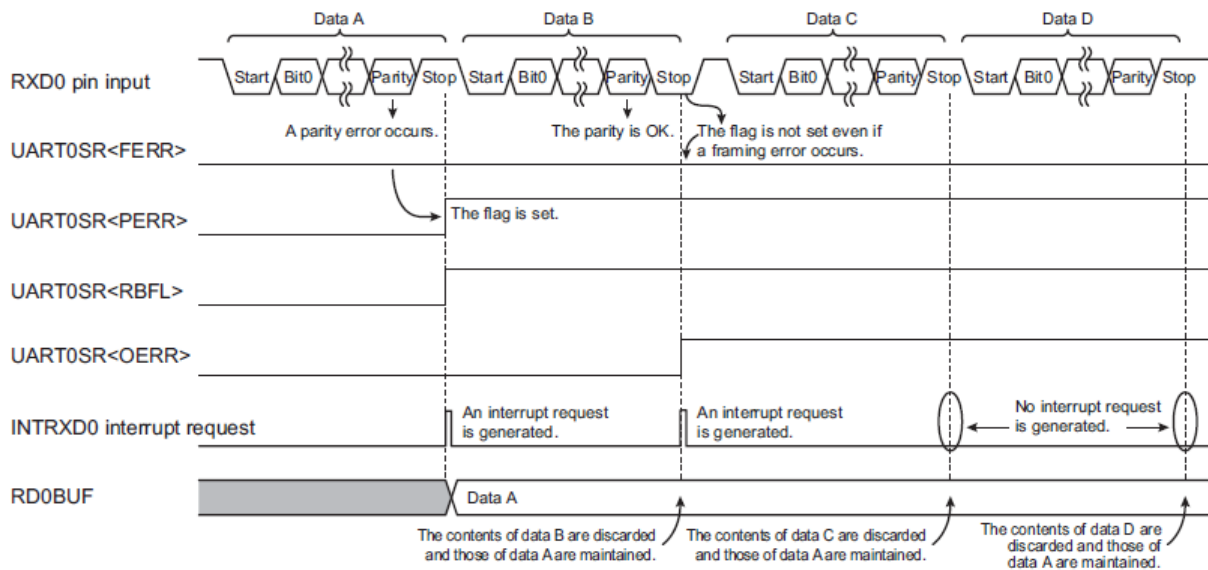

When a parity error occurs in the first received data and a framing error occurs in the second data

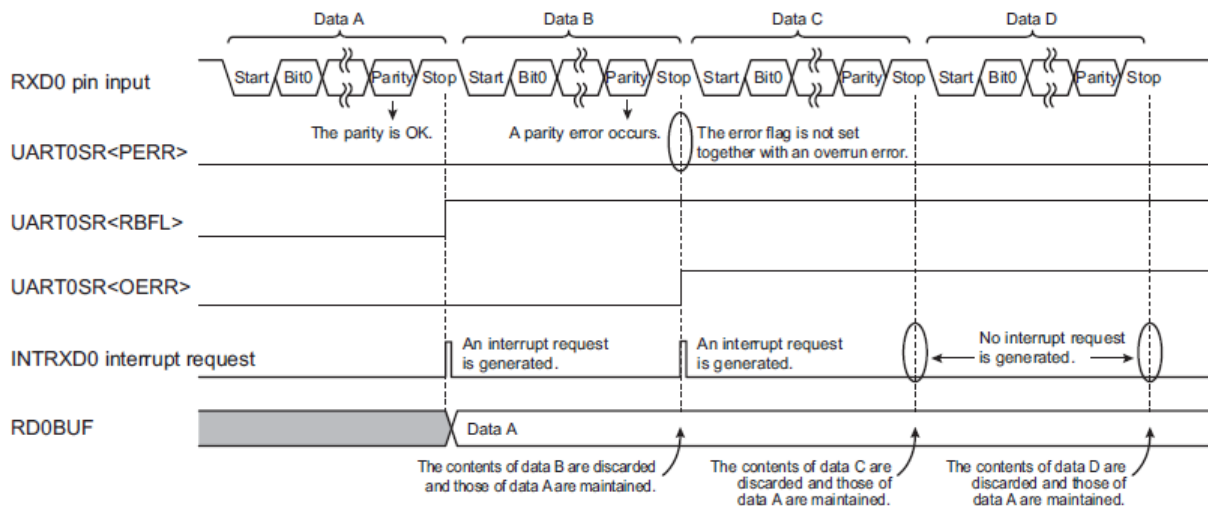

When a parity error occurs in the second received data

Figure 11.12 Framing/Parity Error Flags When an Overrun Error Occurs

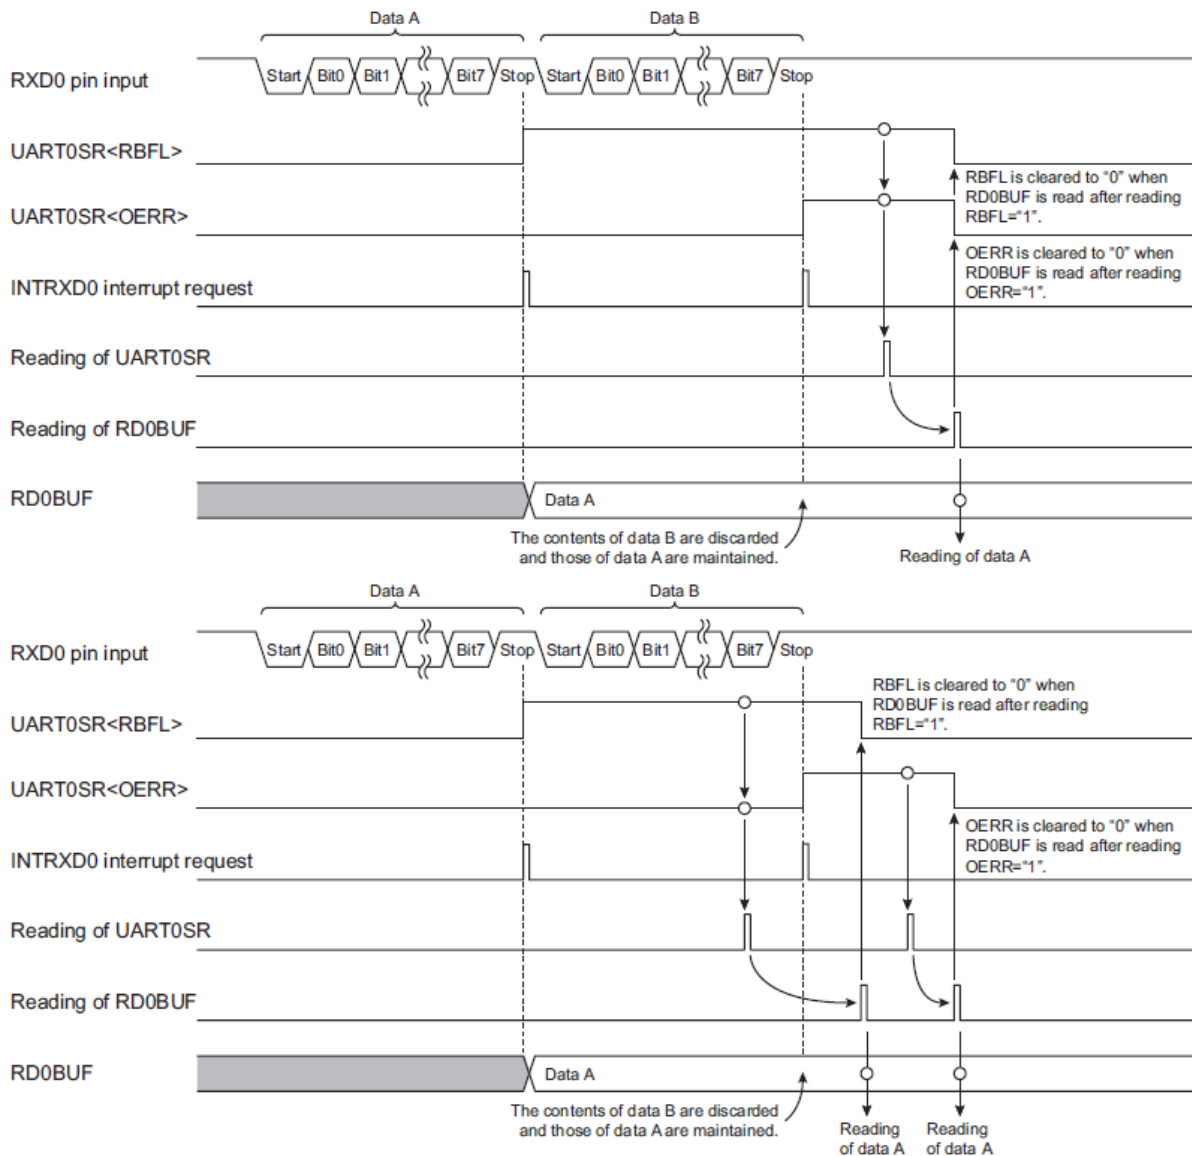


Figure 11.13 Clearance of Overrun Error Flag

#### 11.11.4 Receive Data Buffer Full

Loading the received data in RD1BUF sets UART1SR <RBFL> to "1".

If UART1SR <RBFL> is "1" when UART1SR is read, UART1SR <RBFL> will be cleared to "0" when RD1BUF is read subsequently.

If UART1SR <RBFL> is set to "1" after UART1SR is read, UART1SR <RBFL> will not be cleared to "0" when RD1BUF is read subsequently. In this case, UART1SR <RBFL> will be cleared to "0" when UART1SR is read again and RD1BUF is read.

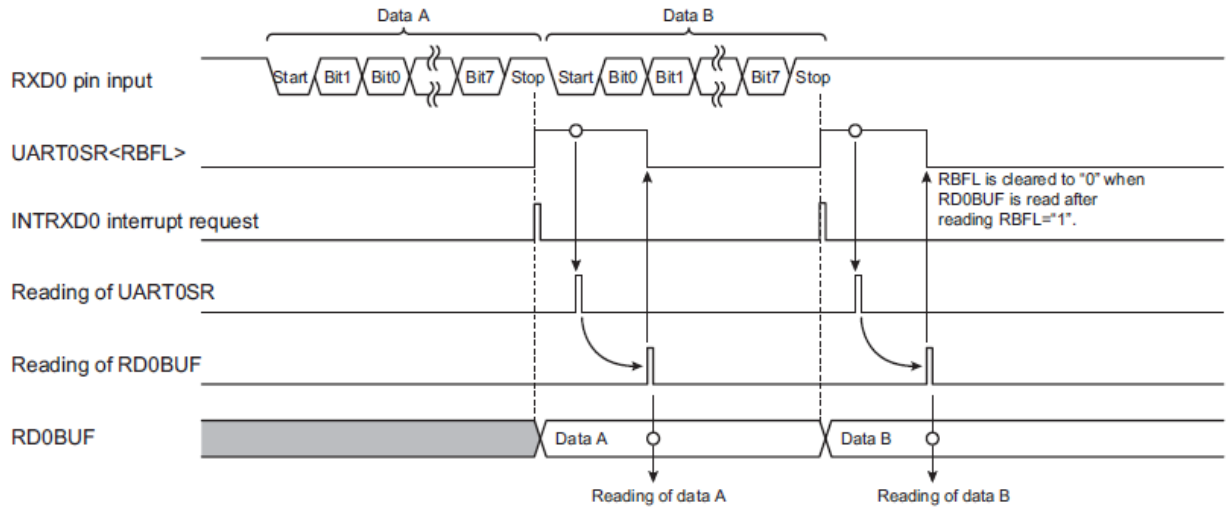


Figure 11.14 Occurrence of Receive Data Buffer Full

### 11.11.5 Transmit Busy Flag

If transmission is completed with no waiting data in TD1BUF (when  $UART1SR <TBFL> = "0"$ ),  $UART1SR <TBSY>$  is cleared to "0". When transmission is restarted after data is written into TD1BUF,  $UART1SR <TBSY>$  is set to "1". At this time, an  $INTTXD1$  interrupt request is generated.

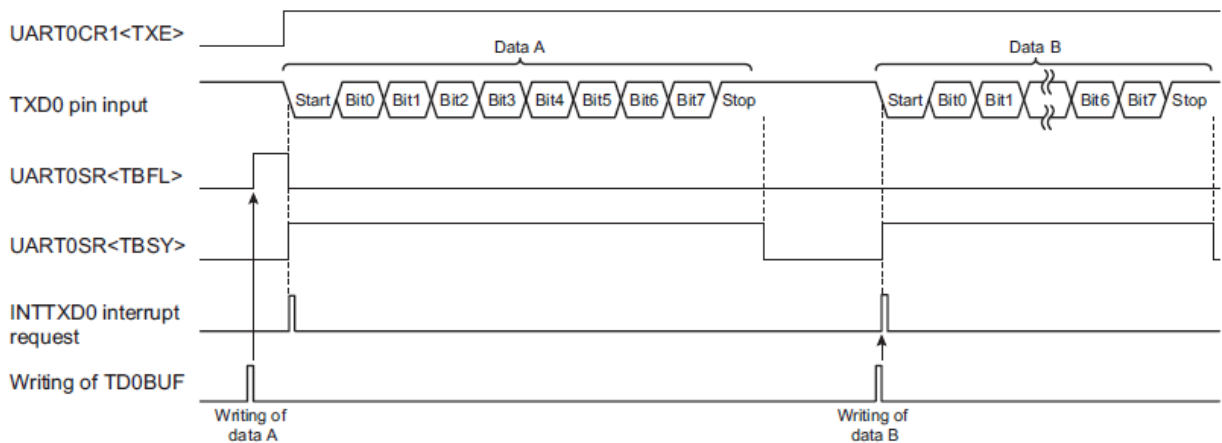


Figure 11.15 Transmit Busy Flag and Occurrence of Transmit Buffer Full

### 11.11.6 Transmit Buffer Full

When TD1BUF has no data, or when data in TD1BUF is transferred to the transmit shift register and transmission is started, UART1SR <TBFL> is cleared to "0". At this time, an INTTXD1 interrupt request is generated.

Writing data into TD1BUF sets UART1SR <TBFL> to "1".

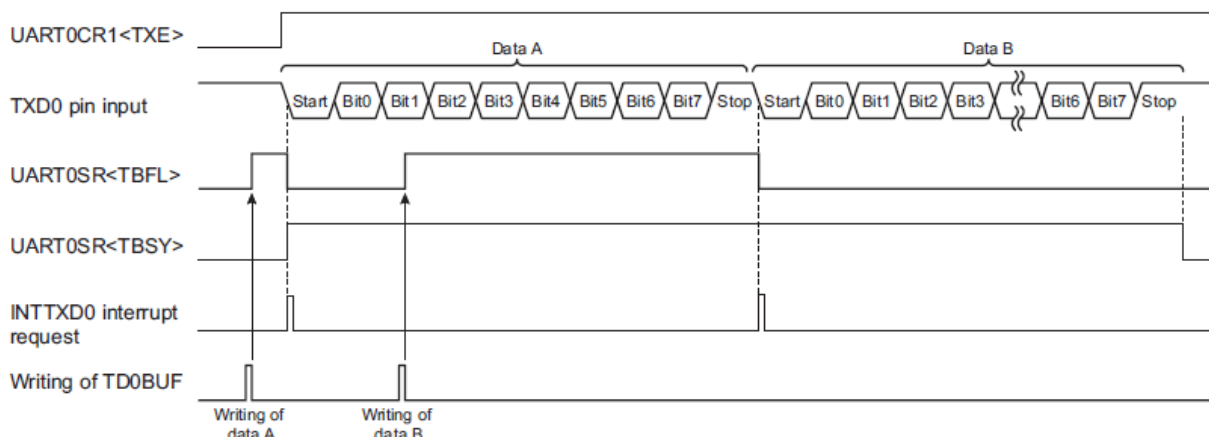


Figure 11.16 Occurrence of Transmit Buffer Full

## 11.12 Receiving Process

Figure 11.17 shows an example of the receiving process. Details of flag judgments in the processing are shown in Table 11.8 and Table 11.9.

If any framing error or parity error is detected, the received data has erroneous value(s). Execute the error handling, for example, by discarding the received data read from RD1BUF and receiving the data again.

If any overrun error is detected, the receiving of one or more pieces of data is unfinished. It is impossible to determine the number of pieces of data that could not be received. Execute the error handling, for example, by receiving data again from the beginning of the transfer. Basically, an overrun error occurs when the internal software processing cannot follow the data transfer speed. It is recommended to slow the transfer baud rate or modify the software to execute flow control.

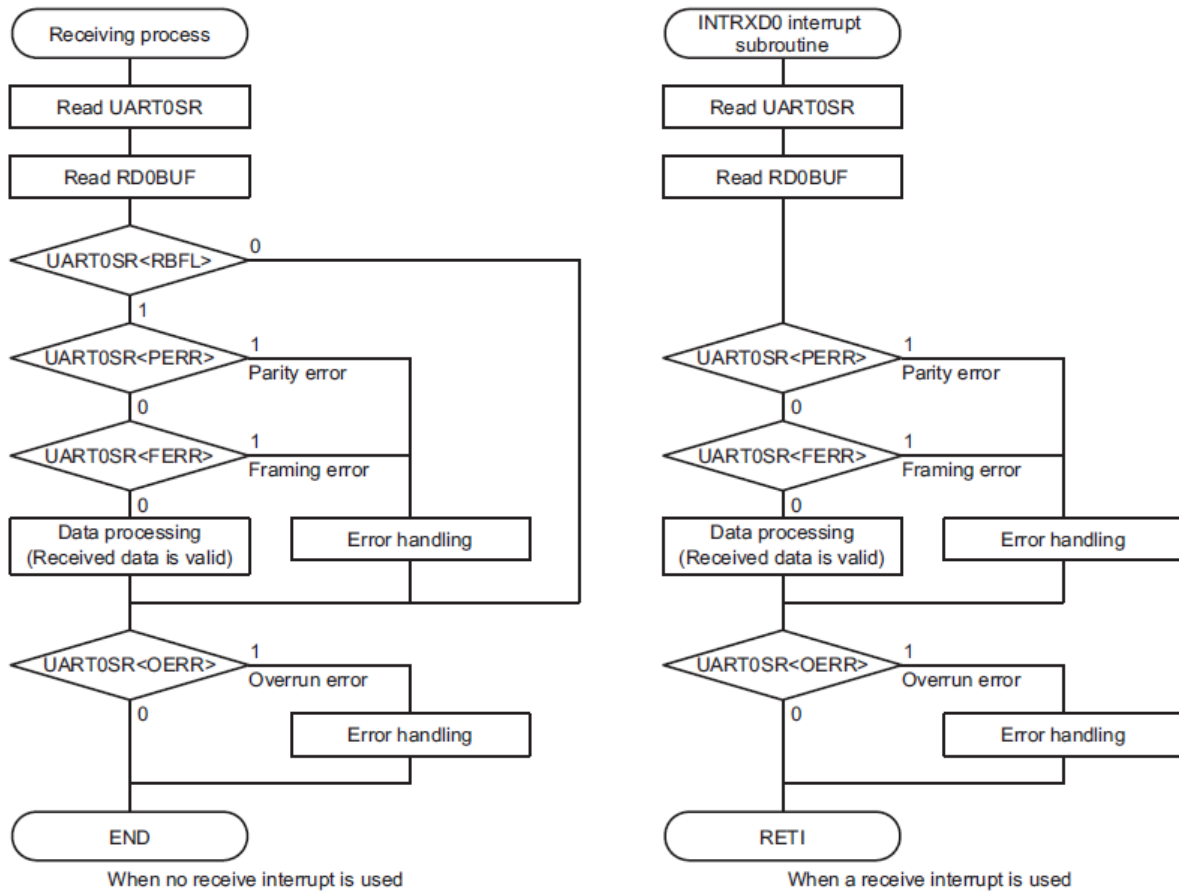


Figure 11.17 Example of Receiving Process

Note): If multiple interrupts are used in the INTRXD1 interrupt subroutine, the interrupt should be enabled after reading UART1SR and RD1BUF.

RBFL	FERR/PERR	OERR	State
0	-	0	Data has not been received yet.
0	-	1	Some pieces of data could not be received during the previous data receiving process (Receiving of next data is completed in the period from when UART0SR is read to when RD0BUF is read in the previous data receiving process.)
1	0	0	Receiving has been completed properly.
1	0	1	Receiving has been completed properly, but some pieces of data could not be received.
1	1	0	Received data has erroneous value(s).
1	1	1	Received data has erroneous value(s) and some pieces of data could not be received.

Table 11.8 Flag Judgments When No Receive Interrupt Is Used

FERR/PERR	OERR	State
0	0	Receiving has been completed properly.
0	1	Receiving has been completed properly, but some pieces of data could not be received.
1	0	Received data has erroneous value(s).
1	1	Received data has erroneous value(s) and some pieces of data could not be received.

**Table 11.9 Flag Judgments When a Receive Interrupt Is Used**

## 12. Flash Memory

MQ6905 has flash memory of 16384 bytes. A write and erase to be performed on flash memory can be controlled in the MCU mode, where the flash memory is accessed by the CPU control, and the flash memory can be executed the erasing and writing without affecting the operations of a running application. Therefore, this mode is used for software debugging and firmware change after shipment of the MQ6905.

In MCU mode, flash memory control registers (FLSCR1 and FLSCR2) are used to control the flash memory. This chapter describes how to access the flash memory using the MCU mode.

### 12.1 Flash Memory Control

The flash memory is controlled by the flash memory control register 1 (FLSCR1), flash memory control register 2 (FLSCR2), and flash memory standby control register (FLSSTB).

#### Flash Memory Control Register 1

FLSCR1 (0x0FD0)	7	6	5	4	3	2	1	0
Bit Symbol	FLSMD			BAREA	FAREA		-	-
Read/Write	R/W			R/W	R/W		R/W	R/W
After reset	0	1	0	0	0		0	0

FLSMD	Flash memory command sequence and toggle control	010: Disable command sequence and toggle execution 101: Enable command sequence and toggle execution Others: Reserved
BAREA	BOOTROM mapping control	0: Hide BOOTROM 1: Show BOOTROM
FAREA	Flash memory area select control	00: Assign the data area 0xC000 through 0xFFFF to the data area 0xC000 through 0xFFFF (standard mapping). 01: Reserved 10: Assign the code area 0xC000 through 0xFFFF to the data area 0xC000 through 0xFFFF. 11: Reserved

Note 1: It is prohibited to make a setting in "Reserved".

Note 2: The flash memory control register 1 has a double-buffer structure comprised of the register FLSCR1 and a shift register.

Writing "0xD5" to the register FLSCR2 allows a register setting to be reflected and take effect in the shift register. This means that a register setting value does not take effect until "0xD5" is written to the register FLSCR2. The value of the shift register can be checked by reading the register FLSCRM.

Note 3: FLSMD must be set to either "0y010" or "0y101".

**Flash Memory Control Register 2**

FLSCR2 (0x0FD1)	7	6	5	4	3	2	1	0
Bit Symbol	CRIEN							
Read/Write	W							
After reset	*	*	*	*	*	*	*	*

CRIEN	FLSCR1 register enable / disable control	0xD5: Enable a change in the FLSCR1 setting Others: Reserved
-------	--	---

*Note:* If "0xD5" is set on FLSCR2<CRIEN> with FLSCR1<FLSMD> set to "101", the flash memory goes into an active state, and MCU consumes the same amount of current as it does during a read.

**Flash Memory Control Register 1 Monitor**

FLSCRM (0x0FD1)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	FLSMDM	BAREAM	FAREAM		ROMSELM	
Read/Write	R	R	R	R	R		R	
After reset	0	0	0	0	0	0	0	0

FLSMDM	Monitoring of FLSCR1 <FLSMD> status	0: FLSCR1 <FLSMD>="101" setting disabled 1: FLSCR1 <FLSMD>="101" setting enabled
BAREAM	Monitoring of FLSCR1<BAREA> status	Value of currently enabled FLSCR1<BAREA>
FAREAM	Monitoring of FLSCR1<FAREA> status	Value of currently enabled FLSCR1<FAREA>
ROMSELM	Monitoring of FLSCR1<ROMSEL> status	Value of currently enabled FLSCR1<ROMSEL>

*Note 1:* FLSCRM is the register that checks the value of the shift register of the flash memory control register 1.

*Note 2:* FLSMDM turns into "1" only if FLSMD="101" becomes effective.

*Note 3:* If an instruction to read FLSCRM is executed, "0" is read from bits 7 and 6.

*Note 4:* In serial PROM mode, "1" is always read from BAREAM..

**Flash Memory Standby Control Register**

FLSSTB (0x0FD2)	7	6	5	4	3	2	1	0
Bit Symbol	-	-	-	-	-	-	-	FSTB
Read/Write	R	R	R	R	R	R	R	W
After reset	0	0	0	0	0	0	0	0

FSTB	Flash memory standby control	0: Disable flash memory standby 1: Enable flash memory standby
------	------------------------------	---

*Note 1):* A value can be written to FSTB only by using a program that resides in RAM. A value written using a program residing in the

*flash memory will be invalidated.*

*Note 2): If FSTB is set to "1", do not execute instructions to fetch or read data from or write data to the flash memory. If they are executed, a flash standby reset will occur.*

*Note 3): If an instruction to read FLSTB is executed, "0" is read from bits 7 through 0.*

## 12.2 Flash Memory Functions

### 12.2.1 Flash Memory Command Sequence and Toggle Control (FLSCR1 <FLSMD>)

To prevent inadvertent writes to the flash memory due to program error or microcontroller malfunction, the execution of the flash memory command sequence and the toggle operation can be disabled (the flash memory can be write protected) by making an appropriate control register setting (write protect). To enable the execution of the command sequence and the toggle operation, set FLSCR1<FLSMD> to "0y101", and then set "0xD5" on FLSCR2<CR1EN>. To disable the execution of the command sequence, set FLSCR1<FLSMD> to "0y010", and then set "0xD5" on FLSCR2<CR1EN>. If the command sequence or the toggle operation is executed with the execution of the command sequence and the toggle operation set to "disable", the executed command sequence or toggle operation takes no effect. After a reset, FLSCR1<FLSMD> is initialized to "0y010" to disable the execution of the command sequence. FLSCR1<FLSMD> should normally be set to "0y010" except when a write or erase is to be performed on the flash memory.

*Note 1): If "0xD5" is set on FLSCR2<CR1EN> with FLSCR1<FLSMD> set to "101", the flash memory goes into an active state, and MCU consumes the same amount of current as it does during a read.*

*Note 2): If FLSCR1<FLSMD> is set to "disable", subsequent commands (write instructions) generated are rejected but a command sequence being executed is not initialized.*

*If you want to set FLSCR1<FLSMD> to "disable", you must finish all command sequences and verify that the flash memory is ready to be read.*

### 12.2.2 Flash memory area switching (FLSCR1<FAREA>)

To perform an erase or write on the flash memory, a memory transfer instruction (command sequence) must be executed. If a memory transfer instruction is used to read or write data, a read or write can be performed only on the data area. To perform an erase or write on the code area, therefore, part of the code area must be temporarily switched to the data area. This switching between data and code areas is performed by making the appropriate FLSCR1<FAREA> setting.

By setting "0xD5" on FLSCR2<CR1EN> after setting FLSCR1<FAREA> to "10", 0xC000 through 0xFFFF (AREA C1) in the code area is mapped to 0xC000 through 0xFFFF (AREA D1) in the data area.

To restore the flash memory to the initial state of mapping, set FLSCR1<FAREA> to "00", and then set "0xD5" on FLSCR2<CR1EN>.

All flash memory areas can be accessed by performing the appropriate steps described above and

then executing the memory transfer instruction on 0xC000 through 0xFFFF (AREA D1) in the data area.

0xC000 through 0xFFFF (AREA D1) in the data area and 0xC000 through 0xFFFF (AREA C1) in the code area are mirror areas; these two areas refer to the same physical address in memory. Therefore, an erase or write must be performed on one of these two mirror areas. For example, If a write is performed on 0xC000 in the data area with FLSCR1<FAREA> set to "10" after performing a write on 0xC000 in the data area with FLSCR1<FAREA> set to "00", data is overwritten. To write data to the flash memory that already has data written to it, existing data must first be erased from the flash memory by performing a sector erase or chip erase, and then data must be written.

Additionally, access to areas to which memory is not assigned should be avoided by executing an instruction or specifying such an area by using jump or call instructions.

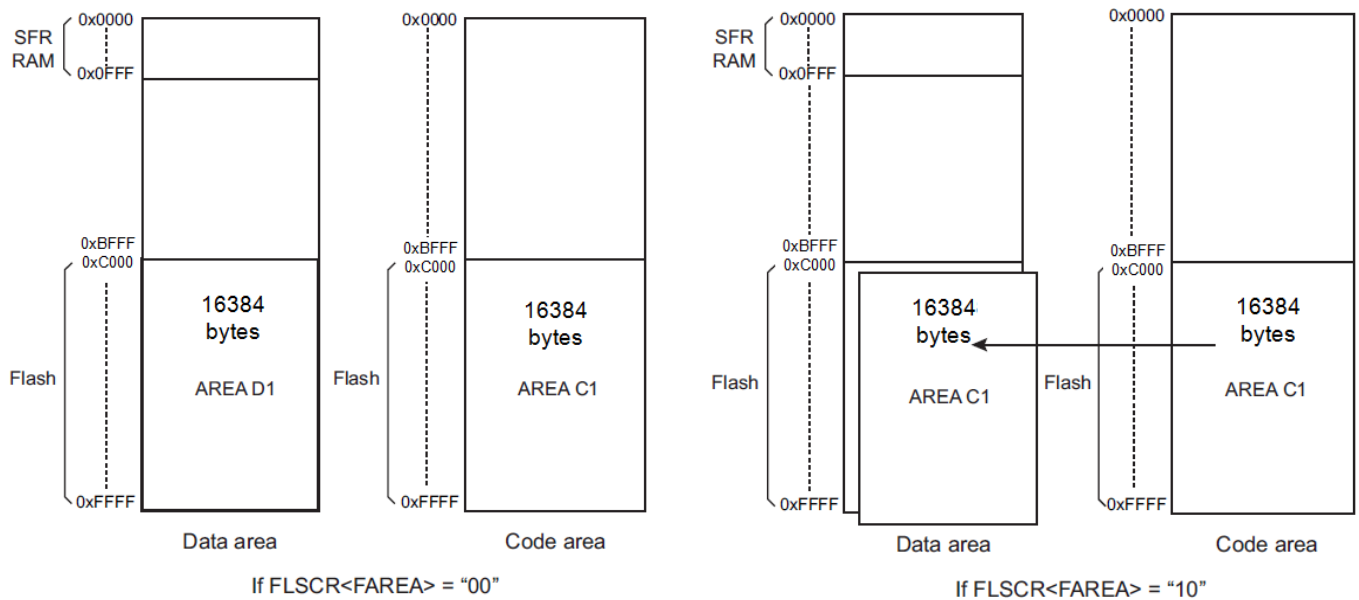


Figure 12-1 Area Switching Using the FLSCR1<FAREA> Setting

### 12.2.3 RAM area switching (33<RAREA>)

If "0xD4" is set on SYSCR4 after SYSCR3<RAREA> is set to "1" in MCU mode, RAM is mapped to the code area. To restore the RAM area to the initial state of mapping, set SYSCR3<RAREA> to "0", and then set "0xD4" on SYSCR4.

In serial PROM mode, RAM is mapped to the code area, irrespective of the SYSCR3<RAREA> setting.

### 12.2.4 BOOTROM area switching (FLSCR1<BAREA>)


If "0xD5" is set on FLSCR2<CR1EN> after FLSCR1<BAREA> is set to "1" in MCU mode, 0x1000

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

through 0x17FF in the code and data areas is masked by flash memory, and 2K-byte (first half of 4KB) BOOTROM is mapped. If you do not want to map BOOTROM, set "0xD5" on FLSCR2<CR1EN> after setting FLSCR1<BAREA> to "0".

A set of codes for programming flash memory in serial PROM mode are built into BOOTROM, and a support program (API) for performing an erase or write on flash memory in a simple manner is also built into one part in the BOOTROM area. Therefore, by calling a subroutine in the support program after BOOTROM is mapped, it is possible to erase, write and read flash memory easily.

In serial PROM mode, BOOTROM is mapped to 0x1000 through 0x17FF in the data area and 0x1000 through 0x1FFF in the code area, irrespective of the FLSCR1<BAREA> setting. BAREA is always "1", and the set BAREA value remains unchanged, even if data is written. "1" is always read from BAREA.

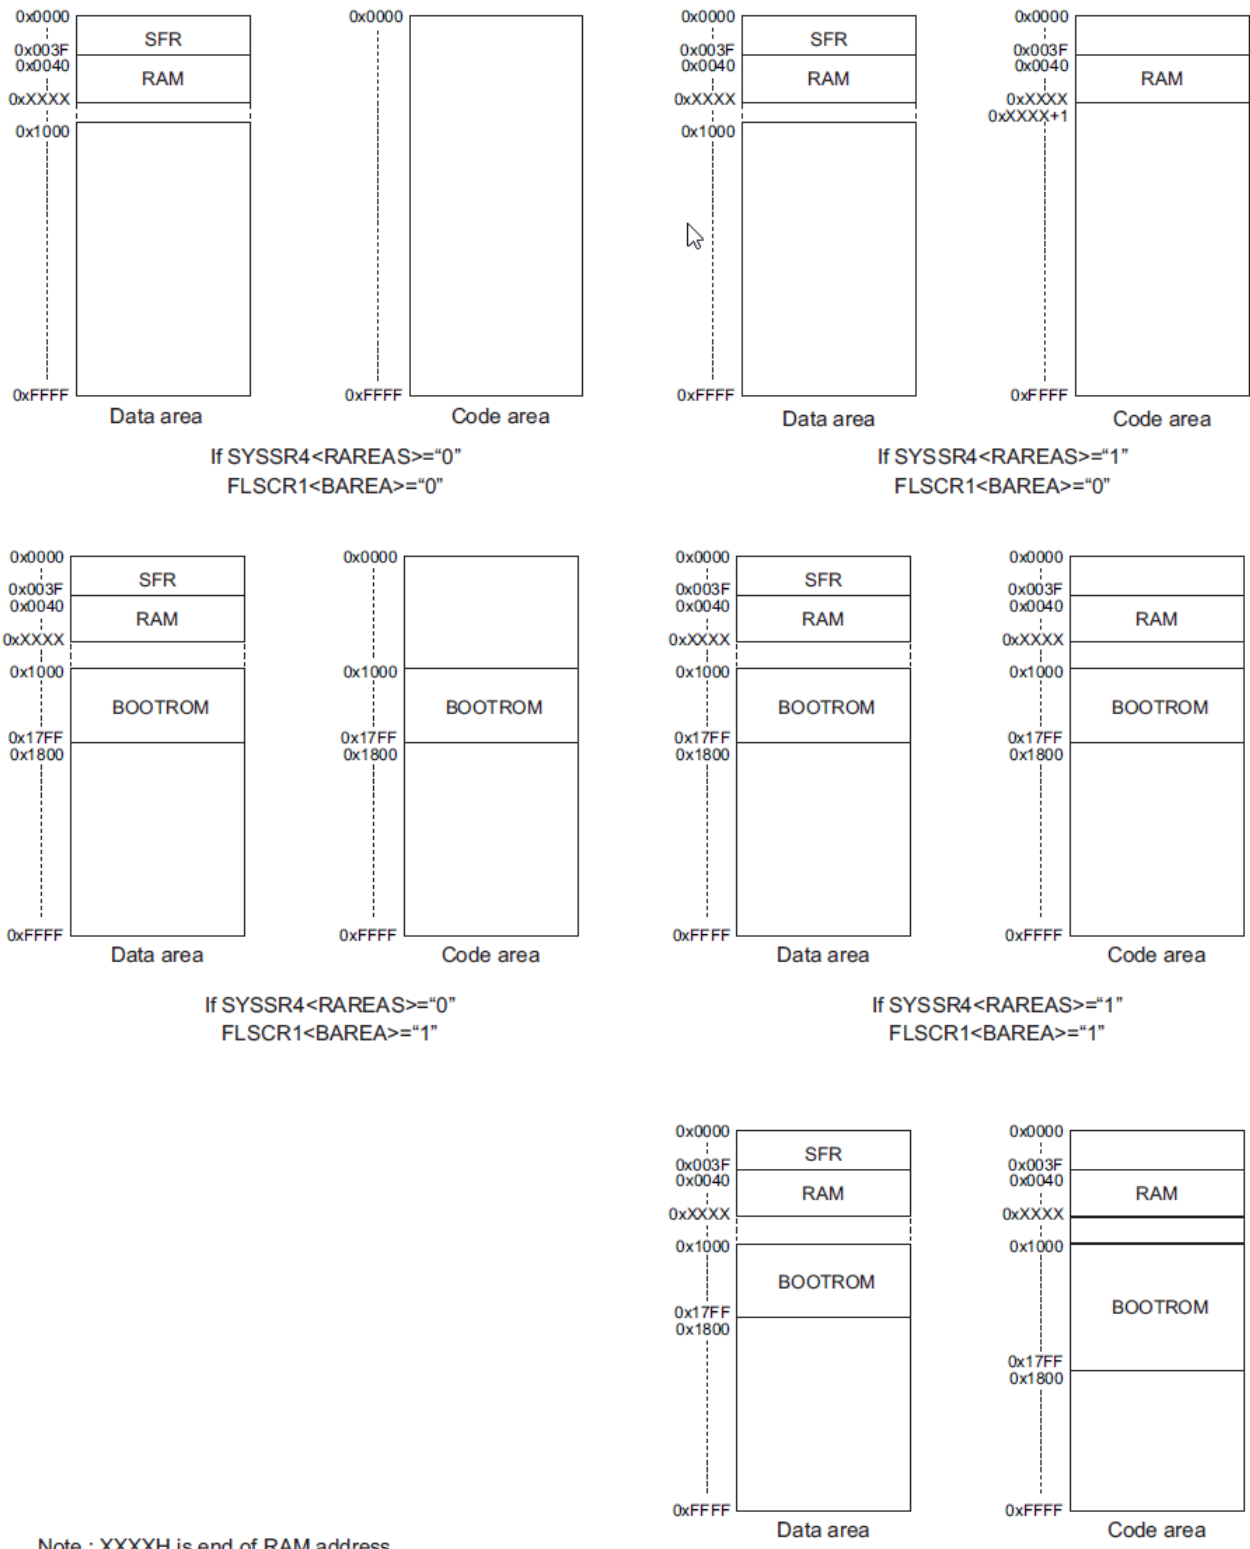

Note : XXXXH is end of RAM address.

In serial PROM mode

Figure 12-2 Show/Hide Switching for BOOTROM and RAM

### 12.2.5 Flash Memory Standby Control (FLSSTB <FSTB>)

FLSSTB<FSTB> is the register provided to maintain the compatibility with the previous product version. It must normally be set to "0". In using FLSSTB<FSTB> built into the TMP89FM45QUG, the following point should be noted: FLSSTB<FSTB> can be configured only by using a program allocated to RAM. If it is configured by using a program allocated to the flash memory, the configured value will be invalidated and does not take effect.

To access the flash memory again after setting FLSSTB<FSTB> to "1", set FLSSTB<FSTB> to "0" by using a program allocated to RAM. If the flash memory is accessed with FLSSTB<FSTB> set to "1," a flash standby reset will occur.

If an interrupt occurs when the interrupt vector is assigned to the flash memory area (SYSCR3<RVCTR> = "0" is effective), FSTB is automatically initialized to "0", and then the interrupt vector of the flash memory area is read. If an interrupt occurs when the interrupt vector is assigned to the RAM area (SYSCR3<RVCTR> = "1" is effective), FSTB is not cleared to "0", and then the interrupt vector of the RAM area is read. In this case, the RAM area should be designated as a referential address of interrupt vector. If the flash memory area is designated as a referential address of interrupt vector, a flash standby reset occurs after an interrupt is generated.

## 12.3 Command Sequence

In MCU mode, the command sequence consists of six commands (JEDEC compatible), as shown in Table 12.1.

Command Sequence		1 <sup>st</sup> Bus Writer Cycle		2 <sup>nd</sup> Bus Writer Cycle		3 <sup>rd</sup> Bus Writer Cycle		4 <sup>th</sup> Bus Writer Cycle		5 <sup>th</sup> Bus Writer Cycle		6 <sup>th</sup> Bus Writer Cycle	
		Add	Data	Add	Data	Add	Data	Add	Data	Add	Data	Add	Data
1	Byte Program	0x#555	0xAA	0x#AAA	0x55	0x#555	0xA0	BA (注 1)	Data (注 1)	0xF566	0xFF	-	
2	Sector Erase(Partial erase in units of 128 bytes)	0x#555	0xAA	0x#AAA	0x55	0x#555	0x80	0x#555	0xAA	0x#AAA	0x55	SA (注 2)	0x20
3	Sector Erase(Partial erase in units of 1K bytes)	0x#555	0xAA	0x#AAA	0x55	0x#555	0x80	0x#555	0xAA	0x#AAA	0x55	SA (注 2)	0x30
4	Chip Erase (All erase)	0x#555	0xAA	0x#AAA	0x55	0x#555	0x80	0x#555	0xAA	0x#AAA	0x55	0x#555	0x10

Table 12.1 Command Sequence

Note 1: Specify the address and data to be written (Refer to Table 12-2 about BA).

Note 2: The area to be erased is specified with the upper 5 bits of the address (Refer to Table 12-3 about SA).

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

*Note 3: Do not start the STOP, IDLE0, IDLE1, IDLE2, SLEEP1 or SLEEP0 mode while a command sequence is being executed or a task specified in a command sequence is being executed (write, erase or ID entry).*

*Note 4: # ; 0x8 through 0xF should be specified as the upper 4bits of the address. Usually, it is recommended that 0xF is specified.*

*Note 5: XXX; Don't care*

### 12.3.1 Byte Program

This command writes the flash memory in units of one byte. The address and data to be written are specified in the 4th bus write cycle. The range of addresses that can be specified is shown in Table 12-2. For example, to write data to 0xC000 in the data area, set FLSCR1<FAREA> to "0y00", set "0xD5" on FLSCR2<CR1EN>, and then specify 0xC000 as an address in the 4th bus write cycle. The time needed to write each byte is 40 μs maximum. The next command sequence cannot be executed if an ongoing write operation is not completed. To check the completion of the write operation, perform read operations twice on the same address in the flash memory, and perform polling until the same data is read from the flash memory. During the write operation, bit 6 is reversed each time a read is performed.

*Note 1: To rewrite data to addresses in the flash memory where data (including 0xFF) is already written, make sure that you erase the existing data by performing a sector erase or chip erase before writing data.*

*Note 2: The data and code areas become mirror areas. As you access these areas, you are brought to the same physical address in memory. When performing a Byte Program, make sure that you write data to either of these two areas, not both.*

*Note 3: Do not perform a Byte Program on areas other than those shown in Table 12-2.*

Write Area		FLSCR1 <FAREA>	Address specified by instruction (Address of 4th bus write cycle)
AREA D1 (Data area)	0x8000 through 0xFFFF	00	0x8000 through 0xFFFF
AREA C1 (Code area)	0x8000 through 0xFFFF	10	0x8000 through 0xFFFF

**Table 12.2 Range of addresses specifiable (BA)**

### 12.3.2 Sector Erase (1K Byte Partial Erase)

This command erases the flash memory in units of 1 kbytes. The flash memory area to be erased is specified by the upper 5 bits of the 6th bus write cycle address. The range of addresses that can be specified is shown in Table 12-3. For example, to erase 1 kbytes from 0xC000 through 0xC3FF in the code area, set FLSCR1<FAREA> to "0y10", set "0xD5" on FLSCR2<CR1EN>, and then specify either 0xC000 or 0xC3FF as the 6th bus write cycle. The sector erase command is effective only in MCU and serial PROM modes, and it cannot be used in parallel PROM mode.

The time needed to erase 1 kbytes is 40 ms maximum. The next command sequence cannot be executed if an ongoing erase operation is not completed. To check the completion of the erase operation, perform read operations twice on the same address in the flash memory, and perform

polling until the same data is read from the flash memory. During the erase operation, bit 6 is reversed each time a read is performed.

Data in the erased area is 0xFF.

*Note 1: The data and code areas become mirror areas. As you access these areas, you are brought to the same physical address in memory. When performing a sector erase, make sure that you erase data from either of these two areas, not both.*

*Note 2: Do not perform a sector erase on areas other than those shown in Table 12-3.*

	Erase Area	FLSCR1 <FAREA>	Address specified by instruction (Address of 6th bus write cycle)
AREA D1	0x8000 through 0x83FF	00	0x8000 through 0x83FF
	0x8400 through 0x87FF		0x8400 through 0x87FF
	0x8800 through 0x8BFF		0x8800 through 0x8BFF
	0x8C00 through 0x8FFF		0x8C00 through 0x8FFF
	0x9000 through 0x93FF		0x9000 through 0x93FF
	0x9400 through 0x97FF		0x9400 through 0x97FF
	0x9800 through 0x9BFF		0x9800 through 0x9BFF
	0x9C00 through 0x9FFF		0x9C00 through 0x9FFF
	0xA000 through 0xA3FF		0xA000 through 0xA3FF
	0xA400 through 0xA7FF		0xA400 through 0xA7FF
	0xA800 through 0xABFF		0xA800 through 0xABFF
	0xAC00 through 0xAFFF		0xAC00 through 0xAFFF
	0xB000 through 0xB3FF		0xB000 through 0xB3FF
	0xB400 through 0xB7FF		0xB400 through 0xB7FF
	0xB800 through 0xBBFF		0xB800 through 0xBBFF
	0xBC00 through 0xBFFF		0xBC00 through 0xBFFF
	0xC000 through 0xC3FF		0xC000 through 0xC3FF
	0xC400 through 0xC7FF		0xC400 through 0xC7FF
	0xC800 through 0xCBFF		0xC800 through 0xCBFF
	0xCC00 through 0xCFFF		0xCC00 through 0xCFFF
	0xD000 through 0xD3FF		0xD000 through 0xD3FF
	0xD400 through 0xD7FF		0xD400 through 0xD7FF
	0xD800 through 0xDBFF		0xD800 through 0xDBFF
	0xDC00 through 0xDFFF		0xDC00 through 0xDFFF
	0xE000 through 0xE3FF		0xE000 through 0xE3FF
	0xE400 through 0xE7FF		0xE400 through 0xE7FF
	0xE800 through 0xEBFF		0xE800 through 0xEBFF
	0xEC00 through 0xEFFF		0xEC00 through 0xEFFF
	0xF000 through 0xF3FF		0xF000 through 0xF3FF
	0xF400 through 0xF7FF		0xF400 through 0xF7FF
	0xF800 through 0xFBFF		0xF800 through 0xFBFF
	0xFC00 through 0xFFFF		0xFC00 through 0xFFFF

**Table 12.3 Range of address specitiable (Area D1)**

	Erase Area	FLSCR1 <FAREA>	Address specified by instruction (Address of 6th bus write cycle)
AREA C1	0x8000 through 0x83FF	10	0x8000 through 0x83FF
	0x8400 through 0x87FF		0x8400 through 0x87FF
	0x8800 through 0x8BFF		0x8800 through 0x8BFF
	0x8C00 through 0x8FFF		0x8C00 through 0x8FFF
	0x9000 through 0x93FF		0x9000 through 0x93FF
	0x9400 through 0x97FF		0x9400 through 0x97FF
	0x9800 through 0x9BFF		0x9800 through 0x9BFF
	0x9C00 through 0x9FFF		0x9C00 through 0x9FFF
	0xA000 through 0xA3FF		0xA000 through 0xA3FF
	0xA400 through 0xA7FF		0xA400 through 0xA7FF
	0xA800 through 0xABFF		0xA800 through 0xABFF
	0xAC00 through 0xAFFF		0xAC00 through 0xAFFF
	0xB000 through 0xB3FF		0xB000 through 0xB3FF
	0xB400 through 0xB7FF		0xB400 through 0xB7FF
	0xB800 through 0xBBFF		0xB800 through 0xBBFF
	0xBC00 through 0xBFFF		0xBC00 through 0xBFFF
	0xC000 through 0xC3FF		0xC000 through 0xC3FF
	0xC400 through 0xC7FF		0xC400 through 0xC7FF
	0xC800 through 0xCBFF		0xC800 through 0xCBFF
	0xCC00 through 0xCFFF		0xCC00 through 0xCFFF
	0xD000 through 0xD3FF		0xD000 through 0xD3FF
	0xD400 through 0xD7FF		0xD400 through 0xD7FF
	0xD800 through 0xDBFF		0xD800 through 0xDBFF
	0xDC00 through 0xDFFF		0xDC00 through 0xDFFF
	0xE000 through 0xE3FF		0xE000 through 0xE3FF
	0xE400 through 0xE7FF		0xE400 through 0xE7FF
	0xE800 through 0xEBFF		0xE800 through 0xEBFF
	0xEC00 through 0xEFFF		0xEC00 through 0xEFFF
	0xF000 through 0xF3FF		0xF000 through 0xF3FF
	0xF400 through 0xF7FF		0xF400 through 0xF7FF
	0xF800 through 0xFBFF		0xF800 through 0xFBFF
	0xFC00 through 0xFFFF		0xFC00 through 0xFFFF

*Table 12.3 Range of address specitiable (Area C1)*

### 12.3.3 Chip erase (all erase)

This command erases the entire flash memory.

The time needed to erase it is 40 ms maximum. The next command sequence cannot be executed if an ongoing erase operation is not completed. To check the completion of the erase operation, perform read operations twice on the same address in the flash memory, and perform polling until the same data is read from the flash memory. During the erase operation, bit 6 is reversed each time a read is performed

Data in the erased area is 0xFF.

### 12.3.4 Security program

If the security program is enabled, the flash memory is write and read protected in parallel PROM mode,

and the flash memory overwrite command and the RAM loader command cannot be executed in serial PROM mode.

To disable the security program, the chip erase must be performed. To check whether the security program is enabled or disabled, read 0xFF7F in product ID mode. Refer to Table 12-4 for further details. The time needed to enable or disable the security program is 40  $\mu$ s maximum. The next command sequence cannot be executed until the security program setting is completed. To check the completion of the security program setting, perform read operations twice on the same address in the flash memory, and perform polling until the same data is read. When the security program setting is being made, bit 6 is reversed each time a read is performed.

## 12.4 Toggle Bit (D6)

After the flash memory write and the chip erase, the value of the 6th bit (D6) in data read by a read operation is reversed each time a read is performed. This bit reversal can be used as a software mechanism for checking the completion of each operation. Normally, perform read operations twice on the same address in the flash memory, and perform polling until the same data is read from the flash memory.

After the flash memory write, the chip erase, and the security program command sequence are executed, the toggle bit read by the first read operation is always "1".

*Note 1: If FLSCR1<FLSMD> is set to "disable", the toggle bit is not reversed.*

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

*Note 2: Do not read the toggle bit by using a 16-bit transfer instruction. If the toggle bit is read using a 16-bit transfer instruction, the toggle bit does not function properly.*

*Note 3: Because the instruction cycle is longer than the write time in SLOW mode, the value is not reversed, even if the toggle bit is read right after the Byte Program is performed.*

## 12.5 Access to the Flash Memory Area

A read or a program fetch cannot be performed on the whole of the flash memory area if data is being written to the flash memory, if data in flash memory is being erased or if a security setting is being made in the flash memory. When performing these operation on the flash memory area, the flash memory cannot be directly accessed by using a program in the flash memory; the flash memory must be accessed using a program in the BOOTROM area or the RAM area.

Data can be written to and read from the flash memory area in units of one byte. Data in the flash memory can be erased in units of 1 kbytes, and all data in the flash memory can be erased at one stroke. A read can be performed using one memory transfer instruction. A write or erase, however, must be performed using more than one memory transfer instruction because the command sequence method is used. For information on the command sequence, refer to Table 12-1.

*Note 1: To allow a program to resume control on the flash memory area that is rewritten, it is recommended that you let the program jump (return) after verifying that the program has been written properly.*

*Note 2: Do not reset the MCU (including a reset generated due to internal factors) when data is being written to the flash memory, data is being erased from the flash memory or the security command is being executed. If a reset occurs, there is the possibility that data in the flash memory may be rewritten to an unexpected value.*

### 12.5.1 Flash Memory Control in MCU Mode

In MCU mode, a write can be performed on the flash memory by executing a control program in RAM or using a support program (API) provided inside BOOTROM.

#### 12.5.1.1 How to write to the flash memory by transferring a control program to the RAM area

This section describes how to execute a control program in RAM in MCU mode. A control program to be executed in RAM must be acquired and stored in the flash memory or it must be imported from an outside source through a communication pin. (The following procedure assumes that a program copy is provided inside the flash memory.)

Steps 1 through 5 and 11 shown below concern the control by a program in the flash memory, and

other steps concern the control by a program transferred to RAM. The following procedure is linked with a program example to be described later.

1. Set the interrupt master enable flag to "disable (DI)" (IMF ← "0").
2. Transfer the write control program to RAM.
3. Establish the non-maskable interrupt vector in the RAM area.
4. After setting both SYSCR3<RAREA> and SYSCR3<RVCTR> to "1", set "0xD4" on SYSCR4. Then allocate RAM to the code area, and switch the vector area to the RAM area.
5. Invoke the erase processing program in the RAM area by generating a CALL instruction.
6. Set FLSCR1<FLSMD> to "0y101", and specify the area to be erased by making the appropriate FLSCR1<FAREA> setting. (Make the appropriate FLSCR1<ROMSEL> setting, as necessary.) Then set "0xD5" on FLSCR2<CR1EN>.
7. Execute the erase command sequence.
8. Perform a read on the same address in the flash memory twice consecutively. (Repeat this step until the read values become the same.)
9. After setting FLSCR1<FLSMD> to "0y010" and FLSCR1<FAREA> to "0y00", set "0xD5" on FLSCR2<CR1EN>. (This disables the execution of the command sequence and returns FAREA to the initial state of mapping.)
10. Generate the RET instruction to return to the flash memory.
11. Invoke the write program in the RAM area by generating a CALL instruction.
12. Set FLSCR1<FLSMD> to "0y101", and make the appropriate FLSCR1<FAREA> setting to specify the area (area erased by performing step 7 above) on which a write is to be performed. (Make the appropriate FLSCR1<ROMSEL> setting, as necessary.) Then set "0xD5" on FLSCR2<CR1EN>.
13. Execute the write command sequence.
14. Perform a read on the same address in the flash memory twice consecutively. (Repeat this step until the read values become the same.)
15. After setting FLSCR1<FLSMD> to "0y010" and FLSCR1<FAREA> to "0y00", set "0xD5" on FLSCR2<CR1EN>. (This disables the execution of the command sequence and returns FAREA to the initial state of mapping.)

16. Generate the RET instruction to return to the flash memory.

17. After setting both SYSCR3<RAREA> and SYSCR3<RVCTR> to "0", set "0xD4" on SYSCR4. Then release RAM allocation for the code area, and switch the vector area to the flash area.

*Note 1: Before writing data to the flash memory from the RAM area in MCU mode, the vector area must be switched to the RAM area by using SYSCR3<RVCTR>, data must be written to the vector addresses (INTUNDEF, INTSWI: 0x01F8 to 0x01F9, INTWDT: 0x01FC to 0x01FD) that correspond to non-maskable interrupts, and the interrupt subroutine (RAM area) must be defined. This allows you to trap the errors that may occur due to an unexpected non-maskable interrupt during a write. If SYSCR3<RVCTR> is set in the flash memory area and if an unexpected interrupt occurs during a write, a malfunction may occur because the vector area in the flash memory cannot be read properly.*

*Note 2: Before using a certain interrupt in MCU mode, the vector address corresponding to that interrupt and the interrupt service routine must be established inside the RAM area. In this case, the non-maskable interrupt setting must be made, as explained in Note 1.*

*Note 3: Before jumping from the flash memory to the RAM area, RAM must be allocated to the code area by making the appropriate SYSCR3<RAREA> setting (setting made in step 4 in the procedure described on the previous page). Example: Case in which a program is transferred to RAM, a sector erase is performed on 0xE000 through 0xEFFF in the code area, and then 0x3F data is written to 0xE500. If non-maskable interrupts (INTSWI, INTUNDEF or INTWDT) occur, system clock reset is generated.*

### 12.5.1.2 How to read data from flash memory

To read data from flash memory, execute transfer instruction for memory. It is possible to read the corresponding individual data (include data of code area) to each address in flash memory, if FLSCR1<FAREA> and FLSCR2 is selected properly.

Document No. : TD01-01-M6905-01	Document Name : MQ6905 Data Sheet	Version : V1.5
---------------------------------	-----------------------------------	----------------

## Appendix A. In-System Programming Function (ISP)

MQ6905 has an in-system programming (ISP) function. Using a combination of this function and iMO on-chip debug emulator MO-Link, the user is able to perform software debugging in the on-board environment. This emulator can be operated from a debugger installed on a PC so that the emulation and debugging functions of an application program can be used to modify a program or for other purposes.

This chapter describes the control pins needed to use the ISP function and how a target system is connected.

### Control Pins

The ISP function uses two pins for communication and four pins for power supply, reset and mode control. The pins used for the on-chip debug function are shown in Table A-1.

Ports P20 and P21 are used as communication control pins of the ISP function. If the on-Chip Debug Emulator is used, therefore, Ports P20 and P21 cannot be debugged as port pins or UART0 and SIO0 pins. However, because the UART0 and SIO0 functions can be assigned to other ports by using SERSEL<SRSEL2>, these communication functions can also be used during on-chip debug operation. For details, refer to the section of I/O ports.


Pin Name (during ISP function)	Input/Output	Function	Pin Name (in MCU mode)
OCDCK	Input	Communication control pin (clock control)	P20/TXD0/SO0
OCDIO	I/O	Communication control pin (data control)	P21/RXD0/SIO
RESETB	Input	Reset control pin	RESETB
MODE	Input	Mode control pin	Mode
VDD	Power Supply	5.0V	
VSS	Power Supply	0V	
Input and output ports other than P20 and P21	I/O	Can be used for an application in a target system	
XIN	Input	To be connected to and oscillator to put these pins in a state of self-oscillation	
XOUT	Ouput		

TableA.1 Pins Used for ISP Function

## How to Connect MQ-Link Debugger to a Target System

To use the ISP function, the specific pins on a target system must be connected to the MQ-Link debugging system. MQ-Link can be connected to a target system via an interface control cable. iMQ provides a connector for this interface control cable as an accessory tool. Mounting this connector on a target system will make it easier to use the ISP function.

The connection between the MQ-Link and a target system is shown in Figure A.1.

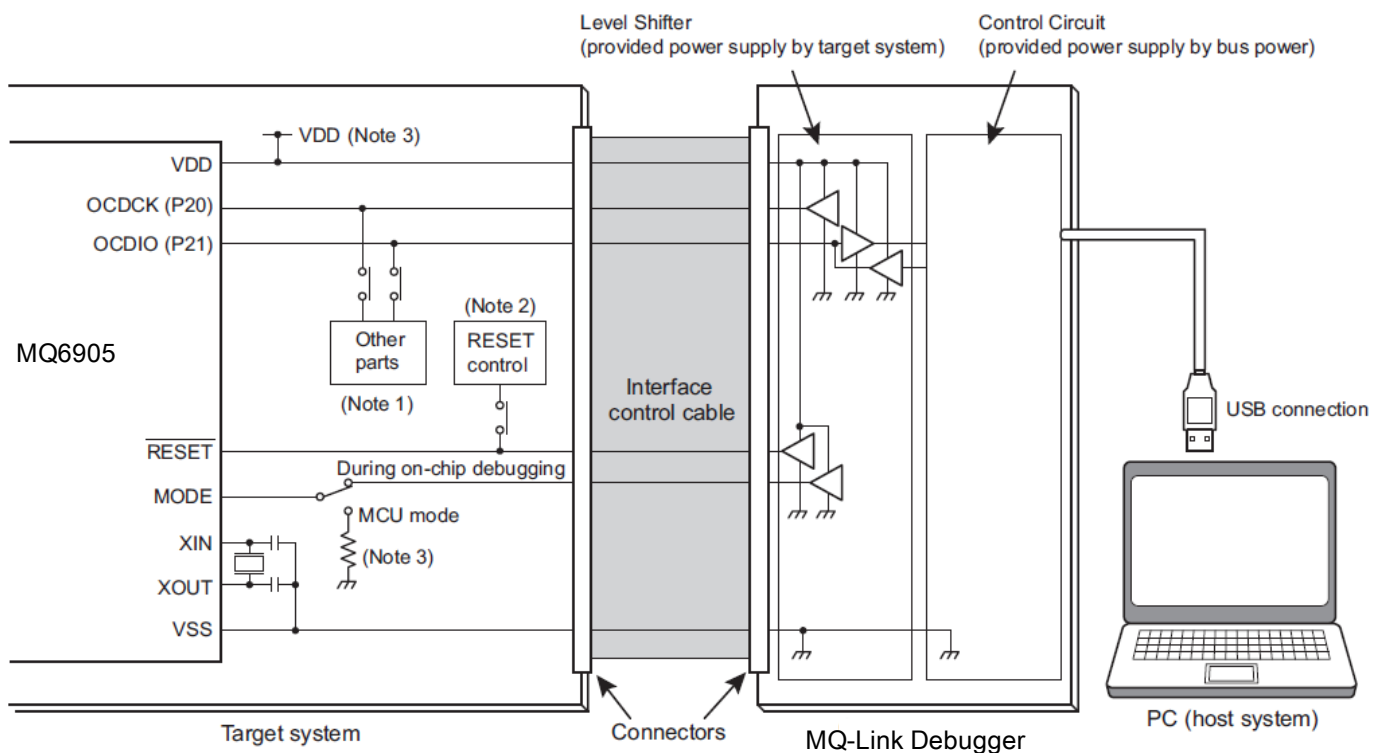

**FigureA.1 How to Connect MQ-Link Debugger to a Target System**



*Note 1): If the reset control circuit on an application board affects the control of the ISP function, it must be disconnected using a jumper, switch, etc.*

*Note 2): During the ISP function, the power supply of MQ6905 on target system is provided by MQ-Link debugger directly. After finishing ISP function, MQ6905 can use the original power supply on target system.*

*Note 3): For details of MQ-Link, please refer to "iMQ i87-IDE User Manual".*

## Appendix B. Package Dimensions

Product No.: MQ6905LA044HVLR

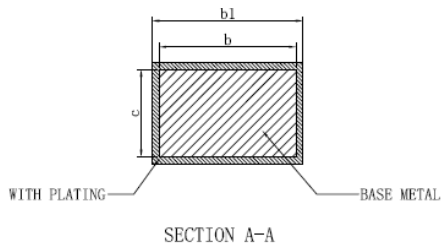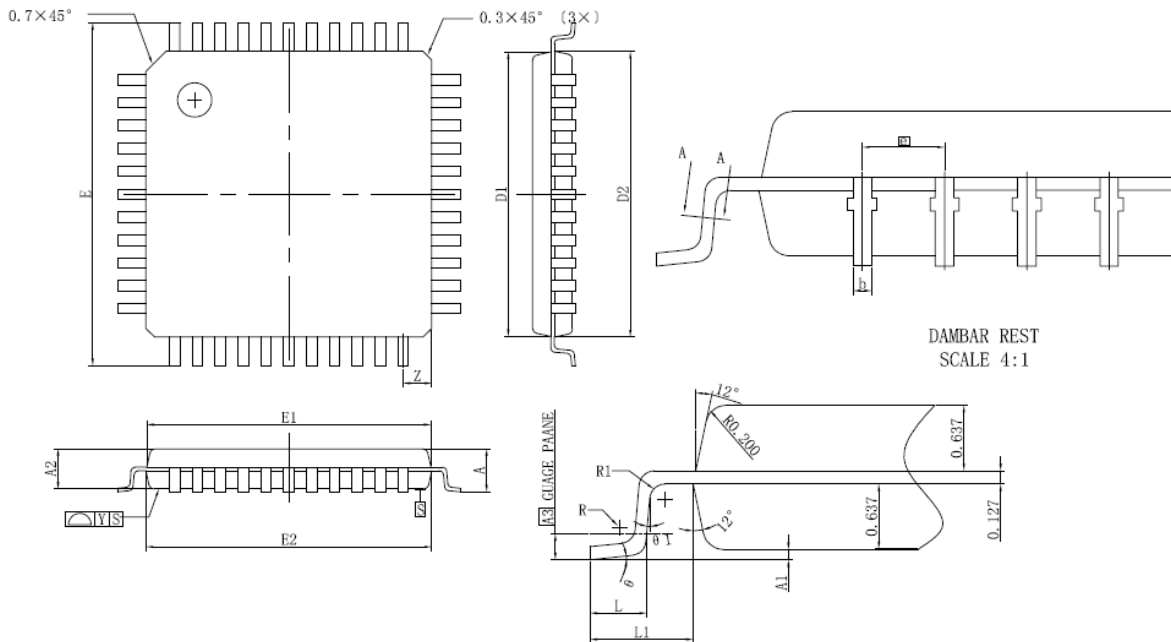

Symbol	MILLMETER		
	MIN	NOM	MAX
A	1.45	1.55	1.65
A1	0.015	-	0.21
A2	1.3	1.4	1.5
A3	-	0.254	
b	0.25	0.30	0.35
b1	0.26	0.32	0.38
c	-	0.127	-
D1	9.85	9.95	10.05
D2	9.9	10.00	10.10
E	11.8	12.00	12.20
E1	9.85	9.95	10.05
E2	9.9	10.00	10.10
e	-	0.8	-
L	0.42	-	0.72
L1	0.95	1.0	1.15
R	0.1	-	0.25
R1	0.1	-	-
theta	0	-	10°
theta1	0	-	-
y	-	-	0.1
Z	-	1.0	-